

CIVIL AVIATION REGULATIONS

SURINAME

PART 8 – OPERATIONS

VERSION 4.0

June 2006

AMENDMENTS

Location	Date	Amended by	Description
8.2.1.7	24 Oct 2006	CASAS	Reference error corrected
8.8.1.30	24 Oct 2006	CASAS	Implementing Standard reference error corrected
8.8.3.1 table	24 Oct 2006	CASAS	Flight visibility 5 km inserted
8.10.1.1	24 Oct 2006	CASAS	"international commercial air transport operations" changed to "commercial air transport operations"
IS 8.8.1.8	24 Oct 2006	CASAS	Numbering error corrected
8.10.1.16 (a)	19 Dec 2006	CASAS	"flight operations officer" added
IS 8.10.1.16 (a)	19 Dec 2006	CASAS	"flight operations officer" deleted
IS 8.10.1.16 (b)	19 Dec 2006	CASAS	Paragraph (b) added
8.10.1.1	30 Oct 2007	CASAS	Article amended in accordance with annex 1: 2.1.10
8.4.1.13	18 Feb 2008	CASAS	New article added
8.8.2.3	18 Feb 2008	CASAS	New paragraphs (b)(c)(d)(e) and notes added
8.6.1.3	22 Sep 2008	CASAS	New (15) inserted and existing (15) changed to (16)
8.6.2.2	22 Sep 2008	CASAS	New paragraph (b) added
8.6.2.7	22 Sep 2008	CASAS	New paragraph (c)(d)(e) added
8.6.2.10	22 Sep 2008	CASAS	New paragraph (d)(e) added
8.6.2.11	22 Sep 2008	CASAS	Article name changed
8.6.2.12	22 Sep 2008	CASAS	Paragraph (b) content changed Table content changed Notes 2,3,4 added New paragraph (c)(d)(e)(f)(g) added
8.6.2.15	22 Sep 2008	CASAS	New paragraph (c)(d)
8.6.2.19	22 Sep 2008	CASAS	New paragraph (c)(d)(e)(f)(g)(h)
8.7.2.2	22 Sep 2008	CASAS	New paragraph (h) added
8.8.1.13	22 Sep 2008	CASAS	New paragraph (c) added
IS: 8.6.2.11	22 Sep 2008	CASAS	New IS article added
IS: 8.10.1.16 (a)(4)	22 Sep 2008	CASAS	Content added
8.10.1.33 (b)(1)	1 Nov 2012	CASAS	"specialized operations training" added
IS 8.10.1.16 (a)(7)	1 Nov 2012	CASAS	Subsection (7) added, old (7) and (8) renumbered to (8) and (9).

CONTENTS

PART 8 – OPERATIONS
AMENDMENTS
8.1	GENERAL.....	1
8.1.1	<i>Applicability and Definitions</i>	1
8.1.1.1	Applicability.....	1
8.1.1.2	Definitions	1
8.1.1.3	Abbreviations	3
8.2	GENERAL OPERATIONS REQUIREMENTS	4
8.2.1	<i>Aircraft Requirements</i>	4
8.2.1.1	Registration Markings	4
8.2.1.2	Civil Aircraft Airworthiness.....	4
8.2.1.3	Special Airworthiness Certificate Operational Restrictions.....	4
8.2.1.4	Aircraft Instruments and Equipment.....	4
8.2.1.5	Inoperative Instruments and Equipment	4
8.2.1.6	Civil Aircraft Flight Manual, Marking and Placard Requirements	5
8.2.1.7	Required Aircraft and Equipment Inspections	6
8.2.1.8	Documents to be Carried on Aircraft: All Operations	6
8.3	AIRCRAFT MAINTENANCE REQUIREMENTS	7
8.3.1.1	Applicability.....	7
8.3.1.2	General	7
8.3.1.3	Maintenance Required.....	7
8.3.1.4	Inspections	8
8.3.1.5	Changes To Aircraft Maintenance Programs	9
8.3.1.6	Inspections: All Other Aircraft	9
8.3.1.7	Content, Form, and Disposition of Maintenance, Preventive Maintenance, Rebuilding, and Modification Records	10
8.3.1.8	Maintenance Records Retention.....	10
8.3.1.9	Transfer of Maintenance Records.....	11
8.4	FLIGHT CREW REQUIREMENTS.....	11
8.4.1.1	Composition of the Flight Crew	11
8.4.1.2	Flight Crew Qualifications.....	11
8.4.1.3	Authorisation in Lieu of a Type Rating	11
8.4.1.4	Licences Required	12
8.4.1.5	Airman: Limitations on Use of Services for Commercial Air Transport.....	12
8.4.1.6	Rating Required for IFR Operations.....	12
8.4.1.7	Special Authorisation Required for Category II/III Operations	12
8.4.1.8	Pilot Logbooks.....	13
8.4.1.9	PIC Currency: Takeoff and Landings.....	13
8.4.1.10	Pilot Currency: IFR Operations	13
8.4.1.11	Pilot Currency: General Aviation Operations.....	13

	8.4.1.12	Pilot Privileges and Limitations	14
	8.4.1.13	Language Proficiency.....	
13			
8.5		CREW MEMBER DUTIES AND RESPONSIBILITIES	14
	8.5.1.1	Authority and Responsibility of the PIC	14
	8.5.1.2	Compliance with Local Regulations	14
	8.5.1.3	Negligent or Reckless Operations of the Aircraft.....	14
	8.5.1.4	Fitness of Flight Crew Members	15
	8.5.1.5	Use of Narcotics, Drugs or Intoxicating Liquor.....	15
	8.5.1.6	Crew Member Use of Seat Belts and Shoulder Harnesses	15
	8.5.1.7	Flight Crew Members at Duty Stations	15
	8.5.1.8	Required Crew Member Equipment.....	16
	8.5.1.9	Compliance with Checklists.....	16
	8.5.1.10	Search and Rescue Information	16
	8.5.1.11	Production of Aircraft and Flight Documentation	16
	8.5.1.12	Locking of Flight Deck Compartment Door: Commercial Air Transport.....	16
	8.5.1.13	Admission to the Flight Deck: Commercial Air Transport	17
	8.5.1.14	Admission of Inspector to the Flight Deck.....	17
	8.5.1.15	Duties During Critical Phases of Flight: Commercial Air Transport.....	17
	8.5.1.16	Manipulation of the Controls: Commercial Air Transport.....	17
	8.5.1.17	Simulated Abnormal Situations in Flight: Commercial Air Transport	17
	8.5.1.18	Completion of the Technical Logbook: Commercial Air Transport.....	17
	8.5.1.19	Reporting Mechanical Irregularities	17
	8.5.1.20	Reporting of Facility and Navigation Aid Inadequacies	18
	8.5.1.21	Reporting of Hazardous Conditions.....	18
	8.5.1.22	Reporting of Incidents.....	18
	8.5.1.23	Accident Notification.....	18
	8.5.1.24	Operation of Cockpit Voice and Flight Data Recorders	18
	8.5.1.25	Crew Member Oxygen: Minimum Supply and Use.....	19
	8.5.1.26	Portable Electronic Devices	19
8.6		FLIGHT PLANNING AND SUPERVISION	19
8.6.1		<i>Flight Plans</i>	19
	8.6.1.1	Submission of a Flight Plan	19
	8.6.1.2	Air Traffic Control Flight Plan: Commercial Air Transport	20
	8.6.1.3	Contents of a Flight Plan	20
	8.6.1.4	Planned Re-clearance.....	21
	8.6.1.5	Changes to a Flight Plan	21
	8.6.1.6	Closing a Flight Plan	21
8.6.2		<i>Flight Planning and Preparation</i>	21
	8.6.2.1	Aircraft Airworthiness and Safety Precautions	21
	8.6.2.2	Adequacy of Operating Facilities	22
	8.6.2.3	Weather Reports and Forecasts	22
	8.6.2.4	Weather Limitations for VFR Flights	22
	8.6.2.5	IFR Destination Aerodromes.....	22
	8.6.2.6	IFR Destination Alternate Requirement	23
	8.6.2.7	IFR Alternate Aerodrome Selection Criteria.....	23
	8.6.2.8	Off-Shore Alternates for Helicopter Operations.....	24
	8.6.2.9	Takeoff Alternate Aerodromes: Commercial Air Transport Operations	24
	8.6.2.10	Maximum Distance from an Adequate Aerodrome for Two-engined Aeroplanes Without an ETOPS Approval	24
	8.6.2.11	Extended Range Operations with Twin-Engined Aeroplanes	25
	8.6.2.12	En Route Alternate Aerodromes: ETOPS Operations.....	26
	8.6.2.13	Fuel, Oil, and Oxygen Planning and Contingency Factors.....	27
	8.6.2.14	Minimum Fuel Supply for VFR Flights.....	28
	8.6.2.15	Minimum Fuel Supply for IFR Flights	28
	8.6.2.16	Flight Planning Document Distribution and Retention: Commercial Air Transport	29
	8.6.2.17	Aircraft Loading, Mass and Balance	30
	8.6.2.18	Maximum Allowable Weights to be Considered on All Load Manifests	30

8.6.2.19	Flight Release Required: Commercial Air Transport	30
8.6.2.20	Operational Flight Plan: Commercial Air Transport	31
8.7	AIRCRAFT OPERATING AND PERFORMANCE LIMITATIONS	31
8.7.1	<i>All Aircraft</i>	31
8.7.1.1	Applicability.....	31
8.7.1.2	General	31
8.7.1.3	Aircraft Performance Calculations	32
8.7.1.4	General Mass and Obstruction Clearance Limitations	32
8.7.2	<i>Aircraft Used in Commercial Air Transport</i>	32
8.7.2.1	Applicability.....	32
8.7.2.2	General	32
8.7.2.3	Aircraft Performance Calculations	33
8.7.2.4	Takeoff limitations	34
8.7.2.5	En Route Limitations: All Engines Operating.....	35
8.7.2.6	En Route Limitations: One Engine Inoperative.....	35
8.7.2.7	En Route Limitations: Two Engines Inoperative.....	36
8.7.2.8	Landing Limitations.....	36
8.8	FLIGHT RULES	37
8.8.1	<i>All Operations</i>	37
8.8.1.1	Operation of Aircraft on the Ground.....	37
8.8.1.2	surface movement of aircraft.....	37
8.8.1.3	Takeoff Conditions	38
8.8.1.4	Flight into Known or Expected Icing.....	38
8.8.1.5	Altimeter Settings.....	38
8.8.1.6	Minimum Safe Altitudes: General.....	38
8.8.1.7	Minimum Safe VFR Altitudes: Commercial Air Transport Operations	39
8.8.1.8	Instrument Approach Operating Minima	39
8.8.1.9	Threshold Crossing Height for Precision Approaches	39
8.8.1.10	Category II and III Operations: General Operating Rules	39
8.8.1.11	Category II and Category III Manual.....	40
8.8.1.12	Authorisation for Deviation from Certain Category II Operations.....	41
8.8.1.13	Diversion Decision	41
8.8.1.14	Operating Near Other Aircraft	41
8.8.1.15	Right-of-Way Rules: Except Water Operations.....	41
8.8.1.16	Right-of-Way Rules: Water Operations	42
8.8.1.17	Use of Aircraft Lights	42
8.8.1.18	Simulated Instrument Flight.....	43
8.8.1.19	Inflight Simulation of Abnormal Situations	43
8.8.1.20	Dropping, Spraying, Towing.....	43
8.8.1.21	Aerobatic Flight.....	43
8.8.1.22	Flight Test Areas	44
8.8.1.23	Prohibited Areas and Restricted Areas	44
8.8.1.24	Operations in MNPS or RVSM Airspace	44
8.8.1.25	Operations on or in the Vicinity of an Uncontrolled Aerodrome.....	44
8.8.1.26	Aerodrome Traffic Pattern Altitudes: Turbojet, turbofan, or Large Aircraft.....	44
8.8.1.27	Compliance with Visual and Electronic Glide Slopes	44
8.8.1.28	Restriction or Suspension of Operations: Commercial Air Transport	45
8.8.1.29	Continuation of Flight when Destination Aerodrome is Temporarily Restricted: Commercial Air Transport 45	
8.8.1.30	Interception	45
8.8.1.31	Noise Abatement Procedures	45
8.8.2	<i>Control of Air Traffic</i>	45
8.8.2.1	ATC Clearances	45
8.8.2.2	Adherence to ATC Clearances	45
8.8.2.3	Communications	46
8.8.2.4	Route to be Flown	46
8.8.2.5	Inadvertent Changes	46
8.8.2.6	ATC Clearance: Intended Changes.....	47
8.8.2.7	Position Reports	47

8.8.2.8	Operations on or in the Vicinity of a Controlled Aerodrome	47
8.8.2.9	Unlawful Interference	48
8.8.2.10	Time Checks	48
8.8.2.11	Universal Signals.....	48
8.8.3	<i>VFR Flight Rules</i>	48
8.8.3.1	Visual Meteorological Conditions.....	48
8.8.3.2	VFR Weather Minimums for Takeoff and Landing.....	49
8.8.3.3	Special VFR Operations	49
8.8.3.4	VFR Cruising Altitudes	49
8.8.3.5	ATC Clearances for VFR Flights	49
8.8.3.6	VFR Flights Requiring ATC Authorisation	50
8.8.3.7	Weather Deterioration Below VMC.....	50
8.8.3.8	Changing from VFR to IFR.....	50
8.8.3.9	Two-way Radio Communication Failure in VFR	50
8.8.4	<i>IFR Flight Rules</i>	51
8.8.4.1	Applicability.....	51
8.8.4.2	IFR in Controlled Airspace	51
8.8.4.3	IFR Flights Outside Controlled Airspace.....	51
8.8.4.4	IFR Takeoff Minimums for Commercial Air Transport.....	51
8.8.4.5	Minimum Altitudes for IFR Operations.....	51
8.8.4.6	Minimum Altitudes for Use of an Autopilot	52
8.8.4.7	IFR Cruising Altitude or Flight Level in Controlled Airspace	52
8.8.4.8	IFR Cruising Altitude or Flight Level in Uncontrolled Airspace	52
8.8.4.9	IFR Radio Communications	52
8.8.4.10	Operation Under IFR in Controlled Airspace: Malfunction Reports	53
8.8.4.11	Continuation of IFR Flight Toward a Destination	53
8.8.4.12	Instrument Approach Procedures and IFR Landing Minimums	53
8.8.4.13	Commencing an Instrument Approach: Commercial Air Transport	53
8.8.4.14	Instrument Approaches to Civil Aerodromes	54
8.8.4.15	Operation Below DA or MDA	54
8.8.4.16	Landing During Instrument Meteorological Conditions	54
8.8.4.17	Execution of a Missed Approach Procedure	55
8.8.4.18	Change from IFR Flight to VFR Flight.....	55
8.8.4.19	Two-Way Radio Communications Failure in IFR	55
8.9	PASSENGERS AND PASSENGER HANDLING	56
8.9.1	<i>All Passenger Carrying Operations</i>	56
8.9.1.1	Unacceptable Conduct	56
8.9.1.2	Refuelling with Passengers on Board	56
8.9.1.3	Passenger Seats, Safety Belts, and Shoulder Harnesses	56
8.9.1.4	Passenger Briefing.....	56
8.9.1.5	Inflight Emergency Instruction	57
8.9.1.6	Passenger Oxygen: Minimum Supply and Use.....	57
8.9.1.7	Alcohol or Drugs	57
8.9.2	<i>Commercial Air Transport Passenger Carrying Operations</i>	57
8.9.2.1	Passenger Compliance with Instructions.....	57
8.9.2.2	Denial of Transportation	58
8.9.2.3	Carriage of Persons Without Compliance with these Passenger-Carrying Requirements	58
8.9.2.4	Cabin Attendants at Duty Stations	58
8.9.2.5	Evacuation Capability.....	58
8.9.2.6	Arming of Automatic Emergency Exits	58
8.9.2.7	Accessibility of Emergency Exits and Equipment	59
8.9.2.8	Stops Where Passengers Remain on Board.....	59
8.9.2.9	Carriage of Persons with Reduced Mobility	59
8.9.2.10	Exit Row Seating.....	59
8.9.2.11	Prohibition Against Carriage of Weapons.....	59
8.9.2.12	Oxygen for Medical Use by Passengers.....	59
8.9.2.13	Carry-on Baggage	60
8.9.2.14	Carriage of Cargo in Passenger Compartments	60
8.9.2.15	Passenger Information Signs	60

8.9.2.16	Required Passenger Briefings	60
8.9.2.17	Passenger Briefing: Extended Overwater Operations.....	61
8.9.2.18	Passenger Seat Belts.....	61
8.9.2.19	Passenger Seat Backs.....	61
8.9.2.20	Stowage of Food, Beverage and Passenger Service.....	61
8.9.2.21	Securing of Items of Mass in Passenger Compartment.....	61
8.10	CREW MEMBER AND FLIGHT OPERATIONS OFFICER QUALIFICATIONS: COMMERCIAL AIR TRANSPORT	62
8.10.1.1	Age 60 - 65 Restriction	62
8.10.1.2	PIC Licence Requirements: Turbojet, Turbofan, or Large Aircraft	62
8.10.1.3	PIC Licence Requirements: Non Turbojet or turbofan Small Aircraft.....	62
8.10.1.4	PIC Aeronautical Experience: Small Aircraft.....	62
8.10.1.5	Co-Pilot Licence Requirements.....	62
8.10.1.6	FE Licence Requirements	62
8.10.1.7	One Pilot Qualified to Perform FE Functions	63
8.10.1.8	Persons Qualified to Flight Release	63
8.10.1.9	Company Procedures Indoctrination	63
8.10.1.10	Initial Dangerous Goods Training	63
8.10.1.11	Initial Security Training	63
8.10.1.12	Initial Crew Resource Management	63
8.10.1.13	Initial Emergency Equipment Drills	63
8.10.1.14	Initial Aircraft Ground Training.....	64
8.10.1.15	Initial Aircraft Flight Training	64
8.10.1.16	Initial Specialised Operations Training	64
8.10.1.17	Aircraft Differences	65
8.10.1.18	Use of Simulators	65
8.10.1.19	Introduction of New Equipment or Procedures	65
8.10.1.20	Aircraft and Instrument Proficiency Checks.....	65
8.10.1.21	Re-establishing Recency of Experience: Pilot.....	66
8.10.1.22	Pairing of Low Experience Crew Members	66
8.10.1.23	Flight Engineer Proficiency Checks.....	66
8.10.1.24	Competence Checks: Cabin Attendants	66
8.10.1.25	Competence Checks: Flight Operations Officers.....	67
8.10.1.26	Supervised Line Flying: Pilots	67
8.10.1.27	Supervised Line Flying: Flight Engineers.....	67
8.10.1.28	Supervised Line Experience: Cabin Attendants	67
8.10.1.29	Line Observations: Flight Operations Officers.....	67
8.10.1.30	Route and Area Checks: Pilot Qualification.....	68
8.10.1.31	PIC Low Minimums Authorisation.....	68
8.10.1.32	Designated Special Aerodromes and Heliports: PIC Qualification	68
8.10.1.33	Recurrent Training: Flight Crew Members	68
8.10.1.34	Recurrent Training: Cabin Attendants	69
8.10.1.35	Recurrent Training: Flight Operations Officers	69
8.10.1.36	Check Airman Training	69
8.10.1.37	Flight Instructor Training.....	70
8.10.1.38	Flight Instructor Qualifications	70
8.10.1.39	Check Airman Qualifications.....	70
8.10.1.40	Check Airman Designation	70
8.10.1.41	Check Airman Limitations	70
8.10.1.42	Substitution of Simulator Experience.....	71
8.10.1.43	Line Qualification: Check Airman and Instructor.....	71
8.10.1.44	Termination of a Proficiency, Competence or Line Check.....	71
8.10.1.45	Recording of Crew Member Qualifications	71
8.10.1.46	Monitoring of Training and Checking Activities.....	71
8.10.1.47	Eligibility Period	72
8.10.1.48	Reductions in Requirements	72
8.10.1.49	Records of Cosmic Radiation	72
8.11	REST PERIODS, DUTY, AND FLIGHT TIME: COMMERCIAL AIR TRANSPORT	72
8.11.1.1	Applicability.....	72

8.11.1.2	Compliance with Scheduling Requirements	72
8.11.1.3	Duty and Rest Periods	73
8.11.1.4	Duty Aloft	73
8.11.1.5	Maximum Number of Flight Time Hours	74
8.11.1.6	Special Flight Duty Schemes	74
8.12	FLIGHT RELEASE: COMMERCIAL AIR TRANSPORT	74
8.12.1.1	Applicability.....	74
8.12.1.2	Qualified Persons Required for Operational Control Functions.....	74
8.12.1.3	Functions Associated with Operational Control.....	74
8.12.1.4	Operational Control Duties	75
8.12.1.5	Contents of a Flight Release/Operational Flight Plan	75
8.12.1.6	Flight Release: Aircraft Requirements.....	75
8.12.1.7	Flight Release: Facilities and NOTAMs.....	75
8.12.1.8	Flight Release: Weather Reports and Forecasts	76
8.12.1.9	Flight Release in Icing Conditions	76
8.12.1.10	Flight Release under VFR or IFR.....	76
8.12.1.11	Flight Release: Minimum Fuel Supply.....	76
8.12.1.12	Flight Release: Aircraft Loading and Performance.....	76
8.12.1.13	Flight Release: Amendment or Re-release En Route.....	76
8.12.1.14	Flight Release with Airborne Weather Radar Equipment	77
8.12.1.15	Flight Release: Retention of Records.....	74
PART 8	IMPLEMENTING STANDARDS	79
IS: 8.2.1.5	Inoperative Instruments and Equipment	1
IS: 8.5.1.5	Use of Narcotics, Drugs or Intoxicating Liquor.....	1
IS: 8.5.1.7	Flight Crew Members at Duty Stations	1
IS: 8.5.1.78	Instrument Approach Operating Minima.....	2
IS: 8.8.1.11	Category II and III Manual.....	6
IS: 8.8.1.5	Altimeter Settings.....	7
IS: 8.8.2.11	Universal Aviation Signals.....	7
IS: 8.9.2.10	Exit Row Seating.....	18
IS: 8.9.2.14	Carriage of Cargo in Passenger Compartments	19
IS: 8.10.1.9	Company Procedures Indoctrination	20
IS: 8.10.1.10	Initial Dangerous Goods Training.....	20
IS: 8.10.1.12	Initial Crew Resource Management Training.....	22
IS: 8.10.1.13	Initial Emergency Equipment Drills	22
IS: 8.10.1.14(b)	Initial Aircraft Ground Training - Flight Crew.....	25
IS: 8.10.1.14(c)	Initial Aircraft Ground Training - Cabin Attendants.....	29
IS: 8.10.1.14(d)	Initial Aircraft Ground Training -Flight Operations Officer	31
IS: 8.10.1.15	Initial Aircraft Flight Training.....	32
IS: 8.10.1.16	Initial Specialised Operations Training.....	34
IS: 8.10.1.17	Aircraft Differences - Flight Operations Officer.....	35
IS: 8.10.1.20	Aircraft and Instrument Proficiency Check: Pilot	35
IS: 8.10.1.22	Pairing of Low Experience Crew Members: Commercial Air Transport	36
IS: 8.10.1.23	Flight Engineer Proficiency Checks	37
IS: 8.10.1.24	Competence Checks: Cabin Attendants.....	37
IS: 8.10.1.25	Competence Checks: Flight Operations Officers	38
IS: 8.10.1.33	Recurrent Training: Flight Crew.....	39
IS: 8.10.1.34	Recurrent Emergency Training: Cabin Attendants	42
IS: 8.10.1.35	Recurrent Training - Flight Operations Officer	44
IS: 8.10.1.36	Check Airman Training.....	44
IS: 8.10.1.37	Flight Instructor Training	45
IS: 8.11.1.3	Duty and Rest Periods.....	46
IS: 8.11.1.5	Maximum Allowable Flight Hours	42

8.1 GENERAL

8.1.1 *Applicability and Definitions*

8.1.1.1 APPLICABILITY

- (a) Part 8 prescribes the requirements for:
- (1) Operations conducted by airmen certified in Suriname while operating aircraft registered in Suriname.
 - (2) Operations of foreign registered aircraft by Surinamese AOC holders.
 - (3) Operations of aircraft within Suriname by airmen or AOC holders of a foreign State.
- (b) For operations outside of Suriname, all Surinamese pilots and operators shall comply with these requirements unless compliance would result in a violation of the laws of the foreign State in which the operation is conducted.

Note: Where a particular requirement is applicable only to a particular segment of aviation operations, it will be identified by a reference to those particular operations, such as "commercial air transport" or "small non-turbojet or turbofan aeroplanes."

Note: Those specific subsections not applicable to foreign operators will include the phrase "This requirement is not applicable to foreign operators."

8.1.1.2 DEFINITIONS

For the purpose of Part 8, the following definitions shall apply—

- (1) **Advisory airspace.** Airspace of defined dimensions, or designated route, within which air traffic advisory service is available.
- (2) **Aerial work.** An aircraft operation in which an aircraft is used for specialised services such as agriculture, construction, photography, surveying, observation and patrol, search and rescue, aerial advertisement, etc.
- (3) **Aerobatic flight.** Manoeuvres intentionally performed by an aircraft involving an abrupt change in its attitude, an abnormal attitude, or an abnormal variation in speed.
- (4) **Air navigation facility.** Any facility used in, available for use in, or designed for use in aid of air navigation, including aerodromes, landing areas, lights, any apparatus or equipment for disseminating weather information, for signalling, for radio directional finding, or for radio or other electrical communication, and any other structure or mechanism having a similar purpose for guiding or controlling flight in the air or the landing and take-off of aircraft.
- (5) **Calendar day.** The period of elapsed time, using Co-ordinated Universal Time or local time, that begins at midnight and ends 24 hours later in the next midnight.
- (6) **Check airman (aircraft).** A person who is qualified, and permitted, to conduct an evaluation in an aircraft, in a flight simulator, or in a flight training device for a particular type aircraft, for a particular AOC holder.
- (7) **Check airman (simulator).** A person who is qualified to conduct an evaluation, but only in a flight simulator or in a flight training device for a particular type aircraft, for a particular AOC holder.
- (8) **Controlled flight.** Any flight which is subject to an air traffic control clearance.
- (9) **Critical engine.** The engine whose failure would most adversely affect the performance or handling qualities of an aircraft.
- (10) **Critical phases of flight.** Those portions of operations involving taxiing, takeoff and landing, and all flight operations below 10,000 feet, except cruise flight..
- (11) **Deadhead Transportation.** Time spent in transportation on aircraft (at the insistence of the AOC holder) to or from a crew member's home station
- (12) **Defined point after takeoff.** The point, within the takeoff and initial climb phase, before which the Class 2 helicopter's ability to continue the flight safely, with one engine inoperative, is not assured and a forced landing may be required.

- (13) **Defined point before landing.** The point, within the approach and landing phase, after which the Class 2 helicopter's ability to continue the flight safely, with one engine inoperative, is not assured and a forced landing may be required.
- (14) **Duty time.** The total time from the moment a person identified in this Part begins, immediately after a rest period, any work on behalf of the AOC holder until that person is free from all restraint associated with that work.
- (15) **Effective length of the runway.** The distance for landing from the point at which the obstruction clearance plane associated with the approach end of the runway intersects the centreline of the runway to the far end.
- (16) **Extended overwater operation.** With respect to aircraft other than helicopters, an operation over water at a horizontal distance of more than 100 nm from the nearest shoreline; and to helicopters, an operation over water at a horizontal distance of more than 50 nm from the nearest shoreline and more than 50 nm from an offshore heliport structure.
- (17) **Flight (s).** The period from takeoff to landing.
- (18) **Flight Duty Period.** The total time from the moment a flight crew member commences duty, immediately subsequent to a rest period and prior to making a flight or a series of flights, to the moment the flight crew member is relieved of all duties having completed such a flight or series of flights.
- (19) **Flight plan.** Specified information provided to air traffic services units, relative to an intended flight or portion of a flight of an aircraft. The term "flight plan" is used to mean variously, full information on all items comprised in the flight plan description, covering the whole route of a flight, or limited information required when the purpose is to obtain a clearance for a minor portion of a flight such as to cross an airway, to take off from, or to land at a controlled aerodrome.
- (20) **General aviation operation.** An aircraft operation other than a commercial air transport operation or an aerial work operation.
- (21) **Helideck.** A heliport located on a floating or fixed offshore structure.
- (22) **Heliport.** An aerodrome or defined area on a structure intended to be used wholly or in part for the arrival, departure, and surface movement of helicopters.
- (23) **Journey log.** A form signed by the PIC of each flight that records the aeroplane's registration, crew member names and duty assignments, the type of flight, and the date, place, and time of arrival and departure.
- (24) **Landing decision point.** The point used in determining landing performance from which, an engine failure occurring at this point, the landing may be safely continued or a balked landing initiated.
- (25) **Line operating flight time.** Flight time recorded by the PIC or CP while in revenue service for an AOC holder.
- (26) **Master minimum equipment list (MMEL).** A list established for a particular aircraft type by the manufacturer with the approval of the State of Manufacture containing items, one or more of which is permitted to be unserviceable at the commencement of a flight. The MMEL may be associated with special operating conditions, limitations or procedures. The MMEL provides the basis for development, review, and approval by the Authority of an individual operator's MEL.
- (27) **Obstruction clearance plane.** A plane sloping upward from the runway at a slope of 1:20 to the horizontal, and tangent to or clearing all obstructions within a specified area surrounding the runway as shown in a profile view of that area. In the plane view, the centreline of the specified area coincides with the centreline of the runway, beginning at the point where the obstruction clearance plane intersects the centreline of the runway and proceeding to a point at least 1,500 feet from the beginning point. Thereafter, the centreline coincides with the takeoff path over the ground for the runway (in the case of takeoffs) or with the instrument approach counterpart (for landings), or where the applicable one of these paths has not been established, it proceeds consistent with turns of at least 4,000 foot radius until a point is reached beyond which the obstruction clearance plane clears all obstructions. This area extends laterally 200 feet on each side of the centreline at the point where the obstruction clearance plane intersects the runway and continues at this width to the end of the runway; then it increases uniformly to 500 feet on each side of the centreline at a point 1,500 feet from the intersection of the obstruction clearance plane with the runway; thereafter, it extends laterally 500 feet on each side of the centreline.

- (28) **Operational flight plan.** The operator's plan for the safe conduct of the flight based on considerations of aircraft performance, other operating limitations, and relevant expected conditions on the route to be followed and at the aerodromes or heliports concerned.
- (29) **Passenger exit seats.** Those seats having direct access to an exit, and those seats in a row of seats through which passengers would have to pass to gain access to an exit, from the first seat inboard of the exit to the first aisle inboard of the exit. A passenger seat having "direct access" means a seat from which a passenger can proceed directly to the exit without entering an aisle or passing around an obstruction.
- (30) **Rest period.** A period free of all restraint, duty or responsibility for an AOC holder conducting commercial air transport operations.
- (31) **Takeoff decision point.** The point used in determining takeoff performance of a Class 1 helicopter from which, an engine failure occurring at this point, either a rejected takeoff may be made or a takeoff safely continued.

8.1.1.3 ABBREVIATIONS

The following abbreviations are used in Part 8:

- (1) AFM – Aeroplane Flight Manual
- (2) AGL – Above Ground Level
- (3) AOC – Air Operator Certificate
- (4) AOM – Aircraft Operating Manual
- (5) APU – Auxiliary Power Unit
- (6) ATC – Air Traffic Control
- (7) CAT – Category
- (8) CDL – Configuration Deviation List
- (9) CP – Copilot
- (10) CRM – Crew Resource Management
- (11) DH – Decision Height
- (12) (E)GPWS – (Enhanced) Ground Proximity Warning System
- (13) ETA – Estimated Time of Arrival
- (14) ETOPS – Extended Twin-engine Operations
- (15) FE – Flight Engineer
- (16) FL – Flight Level
- (17) GPS – Global Positioning System
- (18) IMC – Instrument Meteorological Conditions
- (19) INS – Inertial Navigation System
- (20) LDA – Localizer-type Directional Aid
- (21) LOC – Localizer
- (22) LORAN – Long-range Navigation
- (23) LVTO – Low Visibility Take Off
- (24) MDA – Minimum Descent Altitude
- (25) MEA – Minimum En Route Altitude
- (26) MEL – Minimum Equipment List (Part 1)
- (27) MMEL – Master Minimum Equipment List
- (28) MNPS – Minimum Navigation Performance Specifications
- (29) MOCA – Minimum Obstruction Clearance Altitude
- (30) MSL – Mean Sea Level
- (31) NM – Nautical Miles
- (32) NOTAM – Notice to Airmen
- (33) RFM – Rotorcraft Flight Manual
- (34) RVR – Runway Visual Range

- (35) RVSM – Reduced Vertical Separation Minimum
- (36) PBE – Protective Breathing Equipment
- (37) PIC – Pilot In Command
- (38) SCA – Senior Cabin Attendant
- (39) SM – Statute Miles
- (40) TACAN – Tactical Air Navigation System
- (41) VMC – Visual Meteorological Conditions
- (42) VSM – Vertical Separation Minimum
- (43) V_1 . Takeoff decision speed.
- (44) V_{mo} . Maximum operating speed.
- (45) V_{so} . Stalling speed or the minimum steady flight speed in the landing configuration.

8.2 GENERAL OPERATIONS REQUIREMENTS

8.2.1 Aircraft Requirements

8.2.1.1 REGISTRATION MARKINGS

No person may operate a Surinamese-registered aircraft unless it displays the proper markings prescribed in Part 4.

8.2.1.2 CIVIL AIRCRAFT AIRWORTHINESS

- (a) No person may operate a civil aircraft unless it is in an airworthy condition.
- (b) Each PIC shall determine whether an aircraft is in a condition for safe flight.
- (c) The PIC shall discontinue a flight as soon as practicable when an un-airworthy mechanical, electrical or structural condition occurs.

8.2.1.3 SPECIAL AIRWORTHINESS CERTIFICATE OPERATIONAL RESTRICTIONS

No person may operate an aircraft with a special airworthiness certificate except as provided in the limitations issued with that certificate.

8.2.1.4 AIRCRAFT INSTRUMENTS AND EQUIPMENT

No person may operate an aircraft unless it is equipped with the required instruments and navigation equipment appropriate to type of flight operation conducted and the route being flown.

Note: The instrument and equipment required for specific operations are listed in Part 7.

8.2.1.5 INOPERATIVE INSTRUMENTS AND EQUIPMENT

- (a) No person may takeoff an aircraft with inoperative instruments or equipment installed, except as authorised by the Authority.
- (b) An AOC Holder shall not operate a multi-engine aircraft with inoperative instruments and equipment installed unless the following conditions are met:

- (1) An approved Minimum Equipment List exists for that aircraft.
 - (2) The Authority has issued the AOC Holder specific operating provisions authorising operations in accordance with an approved Minimum Equipment List. The flight crew shall have direct access at all times prior to flight to all of the information contained in the approved Minimum Equipment List through printed or other means approved by the Authority in the AOC Holders specific operating provisions. An approved Minimum Equipment List, as authorised by the specific operating provisions, constitutes an approved change to the type design without requiring recertification.
 - (3) The approved Minimum Equipment List must:
 - (i) Be prepared in accordance with the limitations specified in paragraph (c) of this section.
 - (ii) Provide for the operation of the aircraft with certain instruments and equipment in an inoperative condition.
 - (4) Records identifying the inoperative instruments and equipment and the information required by paragraph (b)(3)(ii) of this section must be available to the pilot.
 - (5) The aircraft is operated under all applicable conditions and limitations contained in the Minimum Equipment List and the specific operating provisions authorising use of the Minimum Equipment List.
- (c) The following instruments and equipment may not be included in the Minimum Equipment List:
- (1) Instruments and equipment that are either specifically or otherwise required by the airworthiness requirements under which the aircraft is type certificated and which are essential for safe operations under all operating conditions.
 - (2) Instruments and equipment required by an airworthiness directive to be in operable condition unless the airworthiness directive provides otherwise.
 - (3) Instruments and equipment required for specific operations under Part 7, Part 8 and/or Part 9 of these regulations.
- (d) Notwithstanding paragraphs (c)(1) and (c)(3) of this section, an aircraft with inoperative instruments or equipment may be operated under a special flight permit under 5.4.1.11 of these regulations

Note: Implementing Standard: See IS: 8.2.1.5 for specific limitation on inoperative instruments and equipment.

8.2.1.6 CIVIL AIRCRAFT FLIGHT MANUAL, MARKING AND PLACARD REQUIREMENTS

- (a) No person may operate a Surinamese-registered civil aircraft unless there is available in the aircraft—
 - (1) A current, approved AFM or RFM; or
 - (2) An AOM approved by the Authority for the AOC holder;
 - (3) If no AFM or RFM exists, approved manual material, markings and placards, or any combination thereof which provide the PIC with the necessary limitations for safe operation.
- (b) No person may operate a civil aircraft within or over Suriname without complying with the operating limitations specified in the approved AFM or RFM, markings and placards, or as otherwise prescribed by the certifying authority for the aircraft's State of Registry.
- (c) Each AFM or RFM shall be updated by implementing changes made mandatory by the State of Registry or the State of Operator, as applicable.
- (d) Each operator shall display in the aircraft all placards, listings, instrument markings or combination thereof, containing those operating limitations prescribed by the certifying authority for the aircraft's State of Registry for visual presentation.

8.2.1.7 REQUIRED AIRCRAFT AND EQUIPMENT INSPECTIONS

- (a) Unless otherwise authorised by the Authority, no person may operate a Surinamese civil aircraft unless it has had the following inspections—
 - (1) For remuneration or hire operations, a 100-hour inspection;
 - (2) For IFR operations, an altimeter and pitot-static system inspection in the past 24 calendar months;
 - (3) For transponder equipped aircraft, a transponder check within the past 12 calendar months; and
 - (4) For ELT-equipped aircraft, an ELT check within the past 12 calendar months.
- (b) Aircraft maintained under an alternate maintenance and inspection program approved by the Authority, as specified in CARS Part 5 (5.6.1.7(a)), may not have current 100-hour inspections in their maintenance records.

8.2.1.8 DOCUMENTS TO BE CARRIED ON AIRCRAFT: ALL OPERATIONS

- (a) Except as provided in 8.2.1.6, no person may operate a civil aircraft unless it has within it the following current and approved documents:
 - (1) Registration Certificate issued to the owner.
 - (2) Airworthiness Certificate.
 - (3) Aircraft Journey Log or Journey Records Section (as part of the ATL).
 - (4) Aircraft Radio License.
 - (5) List of passenger names and points of embarkation and destination, if applicable.
 - (6) Cargo manifest including special loads information.
 - (7) Aircraft Maintenance Log or Maintenance Record Section (as part of the ATL).
 - (8) Air Operator Certificate, if applicable.
 - (9) Noise Certificate, if required.
 - (10) AFM or RFM.
 - (11) Part(s) of the Operations Manual relevant to operation(s) conducted, if required.
 - (12) MEL, if applicable.
 - (13) Category II or III Manual, if applicable.
 - (14) Operational Flight Plan, if applicable.
 - (15) Filed ATC flight plan, if applicable.
 - (16) NOTAMS briefing documentation.
 - (17) Meteorological information.
 - (18) Mass and balance documentation.
 - (19) Roster of special situation passengers, if applicable.
 - (20) Maps and charts for routes of proposed flight or possibly diverted flights.
 - (21) Forms for complying with the reporting requirements of the Authority and the AOC holder.
 - (22) For international flights, a general declaration for customs.
 - (23) Any documentation which may be required by the Authority or States concerned with a proposed flight.

Note: "Special situation passengers" includes armed security personnel, deportees, persons in custody, and persons with special medical needs.

Note: The noise certificate shall state the standards in ICAO Annex 16, Volume 1. The statement may be contained in any document, carried on board, approved by the Authority.

- (b) Entries in documents as mentioned under 8.1.8 (a) (3) and 8.2.1.8 (A) (7) shall be made currently and in ink or indelible pencil and shall be retained for a period of at least 6 months.
- (c) Unless otherwise provided for in the CARS, all other documents as mentioned under 8.2.1.8, which are used for flight preparation and flight execution, shall be retained for a period of at least 3 months.

8.3 AIRCRAFT MAINTENANCE REQUIREMENTS

8.3.1.1 APPLICABILITY

- (a) This Subpart prescribes the rules governing the inspection of Surinamese registered civil aircraft operating within or outside Suriname.
- (b) Subsections 8.3.1.3 and 8.3.1.4 do not apply to aircraft subject to an approved continuous maintenance program approved by the Authority for an AOC holder in Part 9.
- (c) This Subpart applies to all aircraft, as designated below, operated as commercial air transport in Suriname if the operator has not been designated an AOC holder by Suriname.
- (d) This Subpart applies to all general aviation large, complex aircraft operated in Suriname, whether or not the aircraft is registered in Suriname.
- (e) Where any aircraft, not registered in Suriname and operating under an inspection program approved or accepted by the State of Registry, does not have the equipment required by Suriname-for operations within Suriname, the owner/operator shall ensure that such equipment is installed and inspected in accordance with the requirements of the State of Registry, acceptable to the Authority prior to operation of that aircraft in Suriname.

8.3.1.2 GENERAL

- (a) The registered owner or operator of an aircraft is primarily responsible for maintaining that aircraft in an airworthy condition, including compliance with all airworthiness directives.
- (b) No person may perform maintenance, preventive maintenance, or alterations on an aircraft other than as prescribed in this subpart and other applicable regulations, including Part 5.
- (c) No person may operate an aircraft for which a manufacturer's maintenance manual or instructions for continued airworthiness has been issued that contains an airworthiness limitations section unless the mandatory replacement times, inspection intervals and related procedures set forth in specific operating provisions approved by the Authority under Part 9 or in accordance with an inspection program approved under 8.3.1.4.

8.3.1.3 MAINTENANCE REQUIRED

- (a) Each owner or operator of an aircraft shall—
 - (1) Have that aircraft inspected as prescribed in Part 8.3 and discrepancies repaired as prescribed in the Performance Rules of Part 5;
 - (2) Repair, replace, remove, or inspect any inoperative instruments or items of equipment at the next required inspection, except when permitted under the provisions of an approved Minimum Equipment List (MEL);
 - (3) Ensure that a placard has been installed on the aircraft when listed discrepancies include inoperative instruments or equipment; and
 - (4) Ensure that maintenance personnel make appropriate entries in the aircraft maintenance records indicating the aircraft has been approved for return to service.

8.3.1.4 INSPECTIONS

- (a) Except as provided in paragraph (c), no person may operate an aircraft unless, within the preceding 12 calendar months, the aircraft has had—
- (1) A 100-hour inspection in accordance with Part 5 and has been approved for return to service by a person authorised by CARS Part 5 (5.6.1.7); or
 - (2) An inspection for the renewal of an airworthiness certificate in accordance with Part 5.

Note: No inspection performed under paragraph (b) of this section may be substituted for any inspection required by this paragraph unless it is performed by a person authorised to perform 100-hour inspections and is entered as a "100-hour" inspection in the required maintenance record.

- (b) Except as provided in paragraph (c), no person may operate an aircraft carrying any person (other than a crew member) for hire, and no person may give flight instruction for hire in an aircraft which that person provides, unless within the preceding 100 hours of time in service the aircraft has received an 100-hour inspection and been approved for return to service in accordance with Part 5 of this chapter or has received an inspection for the issuance of an airworthiness certificate in accordance with Part 5 of this chapter. The 100-hour limitation may be exceeded by not more than 10 hours while en route to reach a place where the inspection can be done. The excess time used to reach a place where the inspection can be done must be included in computing the next 100 hours of time in service.
- (c) Paragraphs (a) and (b) of this section do not apply to—
- An aircraft that carries a special flight permit, a current experimental certificate, or a provisional airworthiness certificate;
 - An aircraft subject to the requirements of paragraph (d) or (e) of this section; or
 - Turbine-powered rotorcraft when the operator elects to inspect that rotorcraft in accordance with paragraph (e) of this section.
- (d) Progressive inspection. Each registered owner or operator of an aircraft desiring to use a progressive inspection program shall submit a written request to the Authority, and shall provide—
- (1) A licensed mechanic holding an inspection authorisation in accordance with Part 2, an AMO appropriately rated in accordance with Part 6, or the manufacturer of the aircraft to supervise or conduct the progressive inspection;
 - (2) A current inspection procedures manual available and readily understandable to pilot and maintenance personnel containing, in detail—
 - (i) An explanation of the progressive inspection, including the continuity of inspection responsibility, the making of reports, and the keeping of records and technical reference material;
 - (ii) An inspection schedule, specifying the intervals in hours or days when routine and detailed inspections will be performed and including instructions for exceeding an inspection interval by not more than 10 hours while en-route and for changing an inspection interval because of service experience;
 - (iii) Sample routine and detailed inspection forms and instructions for their use; and
 - (iv) Sample reports and records and instructions for their use;
 - (3) Enough housing and equipment for necessary disassembly and proper inspection of the aircraft; and
 - (4) Appropriate current technical information for the aircraft.

Note: The frequency and detail of the progressive inspection shall provide for the complete inspection of the aircraft within each 12 calendar months and be consistent with the current manufacturer's recommendations, field service experience, and the kind of operation in which the aircraft is engaged. The progressive inspection schedule shall ensure that the aircraft, at all times, will be airworthy and will conform to all applicable aircraft specifications, type certificate data sheets, airworthiness directives, and other approved data acceptable to the Authority. If the progressive inspection is discontinued, the owner or operator shall immediately notify the Authority, in writing, of the discontinuance. After the discontinuance, the first 100-hour inspection under Part 8 is due within 12 calendar months after the last complete inspection of the aircraft

under the progressive inspection. The 100-hour inspection under 5.6.1.7 is due within 100 hours after that complete inspection. A complete inspection of the aircraft, for the purpose of determining when the 100 hour inspection is due, requires a detailed inspection of the aircraft and all its components in accordance with the progressive inspection. A routine inspection of the aircraft and a detailed inspection of several components is not considered to be a complete inspection.

- (e) The registered owner or operator of each large aeroplane, turbojet multi-engine aeroplane, turbo propeller-powered multi-engine aeroplane, and turbine-powered rotorcraft shall select, identify in the aircraft maintenance records, and use one of the following programs for the inspection of the aircraft—
 - (1) A current inspection program recommended by the manufacturer;
 - (2) A continuous maintenance program that is part of a continuous maintenance program for that make and model of aircraft currently approved by the Authority for use by an AOC holder; or
 - (3) Any other inspection program established by the registered owner or operator of that aircraft and approved by the Authority.
- (f) Each owner/operator shall include in the selected program the name and address of the person responsible for the scheduling of the inspections required by the program and provide a copy of the program to the person performing inspection on the aircraft.
- (g) No aircraft shall be approved for return to service unless the replacement times for life-limited parts specified in the aircraft specification-type data sheets are complied with and the aeroplane, including airframe, engines, propellers, rotors, appliances, and survival and emergency equipment, is inspected in accordance with an inspection program selected.
- (h) Each person wishing to establish or change an approved inspection program shall submit the program for approval by the Authority and shall include in writing—
 - (1) Instructions and procedures for the conduct of inspection for the particular make and model aircraft, including necessary tests and checks. The instructions shall set forth in detail the parts and areas of the aeronautical products, including survival and emergency equipment required to be inspected; and
 - (2) A schedule for the inspections that shall be performed expressed in terms of time in service, calendar time, number of system operations or any combination of these.
- (i) When an operator changes from one inspection program to another, the operator shall apply the time in service, calendar times, or cycles of operation accumulated under the previous program, in determining time the inspection is due under the new program.

8.3.1.5 CHANGES TO AIRCRAFT MAINTENANCE PROGRAMS

- (a) Whenever the Authority finds that revisions to an approved inspection program are necessary for the continued adequacy of the program, the owner or operator shall, after notification by the Authority, make any changes in the program found to be necessary.
- (b) The owner or operator may petition the Authority to reconsider the notice, within 30 days after receiving that notice.
- (c) Except in the case of an emergency requiring immediate action in the interest of safety, the filing of the petition stays the notice pending a decision by the Authority.

8.3.1.6 INSPECTIONS: ALL OTHER AIRCRAFT

- (a) No person may operate any other aircraft unless within the preceding 12 calendar months it has—
 - (1) Had an inspection in accordance with Performance Rules of Part 5 and approved for return to service by an authorised person; and

- (2) Been issued an Airworthiness Certificate by the Authority.
- (b) No person may operate an aircraft for flight instruction, or for compensation or hire, unless within the preceding 100 hours of time in service the aircraft has been inspected in accordance with the Performance Rules of Part 5 and approved for return to service by an authorised person as identified in Part 5.

8.3.1.7 CONTENT, FORM, AND DISPOSITION OF MAINTENANCE, PREVENTIVE MAINTENANCE, REBUILDING, AND MODIFICATION RECORDS

- (a) The owner/operator of an aircraft shall keep a maintenance record of—
 - (1) The entire aircraft to include—
 - (i) Total time in service (hours, calendar time and cycles, as appropriate) of the aircraft and all life limited parts;
 - (ii) Current inspection status of the aircraft, including the time since required or approved inspections were last performed;
 - (iii) Current empty mass and the location of the centre of gravity when empty;
 - (iv) Addition or removal of equipment;
 - (v) Type and extent of maintenance and alteration, including the time in service and date;
 - (vi) When work was performed; and
 - (vii) A chronological list of compliance with Airworthiness Directives, including methods of compliance.
 - (2) Life limited products—
 - (i) Total time in service;
 - (ii) Date of the last overhaul;
 - (iii) Time in service since the last overhaul; and
 - (iv) Date of the last inspection.
 - (3) Instruments and equipment, the serviceability and operating life of which are determined by their time in service—
 - (i) Records of the time in service as are necessary to determine their serviceability or to compute their operating life; and
 - (ii) Date of last inspection.

8.3.1.8 MAINTENANCE RECORDS RETENTION

- (a) Except for records maintained by an AOC holder, each registered owner or operator shall retain the following records until the work is repeated or superseded by other work of equivalent scope and detail, or for one year after the work is performed—
 - (1) Records of the maintenance, preventive maintenance, minor modifications, and records of the 100-hour, annual, and other required or approved inspections, as appropriate, for each aircraft (including the airframe) and each engine, propeller, rotor, and appliance of an aircraft to include—
 - (i) A description (or reference to data acceptable to the Authority) of the work performed,
 - (ii) The date of completion of the work performed; and
 - (iii) The signature and certificate number of the person approving the aircraft for return to service.
 - (2) Records containing the following information—
 - (i) The total time-in-service of the airframe, each engine, each propeller, and each rotor.
 - (ii) The current status of all life-limited aeronautical products;
 - (iii) The time since last overhaul of all items installed on the aircraft which are required to be overhauled on a specified time basis;
 - (iv) The current inspection status of the aircraft, including the time since the last inspection required by the inspection program under which the aircraft and its appliances are maintained.

- (v) The current status of applicable Airworthiness Directives including, for each, the method of compliance, the Airworthiness Directive number, and revision date. If the Airworthiness Directive involves recurring action, the time and date when the next action is required.
 - (vi) Copies of the forms prescribed by this chapter for each major modification to the airframe and currently installed engines, rotors, propellers, and appliances.
- (b) The records specified in paragraph (a) of this section shall be retained and transferred with the aircraft at the time the aircraft is sold or leased
 - (c) A list of defects shall be retained until the defects are repaired and the aircraft is approved for return to service.
 - (d) The owner or operator shall make all maintenance records required by this subsection available for inspection by the Authority.

8.3.1.9 TRANSFER OF MAINTENANCE RECORDS

Any owner or operator who sells or leases a Surinamese registered aircraft shall transfer to the purchaser/lessee, at the time of sale or lease, the records identified in 8.3.1.8 of that aircraft, in plain language form or in coded form at the election of the purchaser / lessee if the coded form provides for the preservation and retrieval of information in a manner acceptable to the Authority.

8.4 FLIGHT CREW REQUIREMENTS

8.4.1.1 COMPOSITION OF THE FLIGHT CREW

- (a) The number and composition of the flight crew may not be less than that specified in the flight manual or other documents associated with the airworthiness certificate.
- (b) The flight crew shall include at least one member who holds a valid radio license authorising operation of the type of radio transmitting equipment to be used.
- (c) When navigation necessary for the safe operation of the aeroplane cannot be accomplished from the pilot's station the flight crew shall include a member who holds a flight navigator license.
- (d) A CP is required for IFR commercial air transport operations, unless the Authority has issued a deviation.

8.4.1.2 FLIGHT CREW QUALIFICATIONS

- (a) The PIC of a civil aircraft other than those operated under an AOC, shall ensure that the licenses of each flight crew member have been issued or rendered valid by the State of Registry, contain the proper ratings, and that all the flight crew members have maintained recency of experience.
- (b) No person may operate a civil aircraft in commercial air transport or aerial work unless that person is qualified for the specific operation and in the specific type of aircraft used.

8.4.1.3 AUTHORISATION IN LIEU OF A TYPE RATING

- (a) The Authority may authorise a pilot to operate an aircraft requiring a type rating without a type rating for up to 60 days, provided—
 - (1) The Authority has determined that an equivalent level of safety can be achieved through the operating limitations on the authorisation;

- (2) The applicant shows that compliance with this subsection is impracticable for the flight or series of flights;
- (3) The operations—
 - (i) Involve only a ferry flight, training flight, test flight, or practical test for a pilot license or rating;
 - (ii) Are within Suriname, unless, by previous agreement with the Authority, the aircraft is flown to an adjacent contracting State for maintenance;
 - (iii) Are not for compensation or hire unless the compensation or hire involves payment for the use of the aircraft for training or taking a practical test; and
 - (iv) Involve only the carriage of flight crew members considered essential for the flight.
- (4) If the purpose of the authorisation provided by this paragraph cannot be accomplished within the time limit of the authorisation, the Authority may authorise an additional period of up to 60 days.

8.4.1.4 LICENCES REQUIRED

- (a) No person may act as PIC or in any other capacity as a required flight crew member of a civil aircraft of:
 - (1) Surinamese registry, unless he or she carries in his/her personal possession the appropriate and current licence for that flight crew position for that type of aircraft and a valid medical certificate.
 - (2) Foreign registry, unless he or she carries in his/her personal possession a valid and current licence for that type of aircraft issued to them by the State in which the aircraft is registered.

8.4.1.5 AIRMAN: LIMITATIONS ON USE OF SERVICES FOR COMMERCIAL AIR TRANSPORT

No person may serve as an airman, nor may any AOC holder use an airman in commercial air transport unless that person is qualified for the operations for which they are to be used.

Note: The qualifications for airman engaged in commercial air transport are provided in Subpart 8.10.

8.4.1.6 RATING REQUIRED FOR IFR OPERATIONS

- (a) No person may act as PIC of a civil aircraft under IFR or in weather conditions less than the minimums prescribed for VFR flight unless—
 - (1) In the case of an aeroplane, the pilot holds an instrument rating with an appropriate aeroplane category, class, and type rating (if required) for the aeroplane being flown;
 - (2) In the case of helicopter, the pilot holds a helicopter instrument rating for helicopters not limited to VFR operations.

8.4.1.7 SPECIAL AUTHORISATION REQUIRED FOR CATEGORY II/III OPERATIONS

- (a) Except as shown in paragraph (b), no person may act as a pilot crew member of a civil aircraft in a Category II/III operation unless—
 - (1) In the case of a PIC, he or she holds a current Category II or III pilot authorisation for that type aircraft.
 - (2) In the case of an CP, he or she is authorised by the State of Registry to act as CP in that aircraft in Category II/III operations.
- (b) An authorisation is not required for individual pilots of an AOC holder which has operations specifications approving Category II or III operations.

8.4.1.8 PILOT LOGBOOKS

- (a) Each pilot shall show the aeronautical training and experience used to meet the requirements for a licence or rating, or recency of experience, by a reliable record.
- (b) Each PIC shall carry his or her logbook on all general aviation international flights.
- (c) A student pilot shall carry his or her logbook, including the proper flight instructor endorsements, on all solo cross-country flights.

Note: The acceptable methods of logging experience are outlined in the Regulations on license requirements.

8.4.1.9 PIC CURRENCY: TAKEOFF AND LANDINGS

- (a) No person may act as PIC or as CP, handling the flight controls, of an aircraft carrying passengers, nor of an aircraft certified for more than one required pilot flight crew member unless, within the preceding 90 days that pilot has:
 - (1) Made 3 takeoffs and landings as the sole manipulator of the flight controls in an aircraft of the same category and class and if a type rating is required, of the same type.
 - (2) *For a tailwheel aeroplane*, made the 3 takeoffs and landings in a tailwheel aeroplane with each landing to a full stop.
 - (3) *For night operations*, made the 3 takeoffs and landings required by paragraph (a)(1) at night.
- (b) A pilot who has not met the recency of experience for takeoffs and landings shall satisfactorily complete a requalification curriculum acceptable to the Authority.
- (c) Requirements of paragraphs (a) and (b) may be satisfied in a flight simulator approved by the Authority.

8.4.1.10 PILOT CURRENCY: IFR OPERATIONS

- (a) No person may act as PIC under IFR, nor in IMC, unless he or she has, within the past 6 calendar months—
 - (1) Logged at least 6 hours of instrument flight time including at least 3 hours in flight in the category of aircraft; and
 - (2) Completed at least 6 instrument approaches.
- (b) A pilot who has completed an instrument competency check with an authorised representative of the Authority retains currency for IFR operations for 6 calendar months following that check.

8.4.1.11 PILOT CURRENCY: GENERAL AVIATION OPERATIONS

- (a) No person may act as PIC of an aircraft type certified for more than one pilot unless, since the beginning of the past 12 calendar months, he or she has passed a proficiency check in an aircraft requiring more than one pilot with an authorised representative of the Authority.
- (b) No person may act as PIC of an aircraft type certified for more than one pilot unless, since the beginning of the past 24 calendar months, he or she has passed a proficiency check in the type aircraft to be operated.
- (c) No person may act as PIC of an aircraft type certified for a single pilot unless, since the beginning of the 24 calendar months, he or she has passed a proficiency check with an authorised representative of the Authority.
- (d) The person conducting the proficiency checks shall ensure that each check duplicates the manoeuvres of the type rating practical test.

- (e) No person may act as CP of an aircraft type certified for more than one pilot unless, since the beginning of the 12 calendar months, he or she has—
 - (1) Become familiar with the aircraft systems, performance, normal and emergency procedures; and
 - (2) Logged 3 takeoff and landings as the sole manipulator of the controls.

Note: Subsection 8.4.1.11 does not apply to pilots engaged in commercial air transport operations. Those requirements are outlined in 8.10.1.21.

8.4.1.12 PILOT PRIVILEGES AND LIMITATIONS

A pilot may conduct operations only within the general privileges and limitations of each licence as specified in the Regulations on license requirements.

8.4.1.13 LANGUAGE PROFICIENCY

Each AOC holder shall ensure that flight crew members demonstrate the ability to speak and understand the language used for radiotelephony communications as specified in CARS Part 2.

8.5 CREW MEMBER DUTIES AND RESPONSIBILITIES

8.5.1.1 AUTHORITY AND RESPONSIBILITY OF THE PIC

- (a) The PIC shall be responsible for the operations and safety of the aircraft and for the safety of all persons on board, during flight.
- (b) The PIC of an aircraft shall have final authority as to the operation of the aircraft while he or she is in command.
- (c) The PIC of an aircraft shall, whether manipulating the controls or not, be responsible for the operation of the aircraft in accordance with the rules of the air, except that the PIC may depart from these rules in emergency circumstances that render such departure absolutely necessary in the interests of safety.

8.5.1.2 COMPLIANCE WITH LOCAL REGULATIONS

- (a) The PIC shall comply with the relevant laws, regulations and procedures of the States in which the aircraft is operated.
- (b) If an emergency situation which endangers the safety of the aircraft or persons necessitates the taking of action which involves a violation of local regulations or procedures, the PIC shall—
 - (1) Notify the appropriate local authority without delay;
 - (2) Submit a report of the circumstances, if required by the State in which the incident occurs; and
 - (3) Submit a copy of this report to the State of Registry.
- (c) Each PIC shall submit reports specified in paragraph (b) to the Authority within 10 days in the form prescribed.

8.5.1.3 NEGLIGENT OR RECKLESS OPERATIONS OF THE AIRCRAFT

No person may operate an aircraft in a negligent or reckless manner so as to endanger life or property of others.

8.5.1.4 FITNESS OF FLIGHT CREW MEMBERS

- (a) No person may act as PIC or in any other capacity as a required flight crew member when he or she is aware of any decrease in his or her medical fitness which might render him or her unable to safely exercise the privileges of his or her licence.
- (b) The PIC shall be responsible for ensuring that a flight is not—
 - (1) Commenced if any flight crew member is incapacitated from performing duties by any cause such as injury, sickness, fatigue, the effects of alcohol or drugs; or
 - (2) Continued beyond the nearest suitable aerodrome if a flight crew members' capacity to perform functions is significantly reduced by impairment of faculties from causes such as fatigue, sickness or lack of oxygen.

8.5.1.5 USE OF NARCOTICS, DRUGS OR INTOXICATING LIQUOR

- (a) No person may act or attempt to act as a crew member of a civil aircraft—
 - (1) Within 8 hours after the consumption of any alcoholic beverage;
 - (2) While under the influence of alcohol; or
 - (3) While using any drug that affects the person's faculties in any way contrary to safety.
- (b) A crew member shall, up to 8 hours before or immediately after acting or attempting to act as a crew member, on the request of a law enforcement officer or the Authority, submit to a test to indicate the presence of alcohol or narcotic drugs in the blood.

Implementing Standard: See IS: 8.5.1.5 for specific requirements pertaining to testing for alcohol or narcotics.

8.5.1.6 CREW MEMBER USE OF SEAT BELTS AND SHOULDER HARNESSSES

- (a) Each crew member shall have his or her seat belts fastened during takeoff and landing and all other times when seated at his or her station.
- (b) Each crew member occupying a station equipped with a shoulder harness shall fasten that harness during takeoff and landing, except that the shoulder harness may be unfastened if the crew member cannot perform the required duties with the shoulder harness fastened.
- (c) Each occupant of a seat equipped with a combined safety belt and shoulder harness shall have the combined safety belt and shoulder harness properly secured around that occupant during takeoff and landing and be able to properly perform assigned duties.
- (d) At each unoccupied seat, the safety belt and shoulder harness, if installed, shall be secured so as not to interfere with crew members in the performance of their duties or with the rapid egress of occupants in an emergency.

8.5.1.7 FLIGHT CREW MEMBERS AT DUTY STATIONS

- (a) Each required flight crew member shall remain at the assigned duty station during take-off and landing and critical phases of flight.
- (b) All flight crew members required to be on flight deck duty shall communicate through boom or throat microphones below FL 100.
- (c) Each flight crew member shall remain at his or her station during all phases of flight unless—

- (1) Absence is necessary for the performance of his or her duties in connection with the operation;
- (2) Absence is necessary for physiological needs, provided one qualified pilot remains at the controls at all times; or
- (3) The crew member is taking a rest period and a qualified relief crew member replaces him or her at the duty station.

Implementing Standard: IS: 8.5.1.7 for specific requirement pertaining to qualified relief crew members.

8.5.1.8 REQUIRED CREW MEMBER EQUIPMENT

- (a) Each crew member involved in night operations shall have a flashlight at his or her station.
- (b) Each flight crew member shall have at his or her station an aircraft checklist containing at least the pre-takeoff, after takeoff, before landing and emergency procedures.
- (c) Each pilot crew member shall have at his or her station current and suitable charts to cover the route of the proposed flight and any route along which it is reasonable to expect that the flight may be diverted.
- (d) Each flight crew member assessed as fit to exercise the privileges of a license subject to the use of suitable correcting lenses, shall have a spare set of the correcting lenses readily available when performing as a required crew member in commercial air transport.

8.5.1.9 COMPLIANCE WITH CHECKLISTS

The PIC shall ensure that the flight crew follows the approved checklist procedures when operating the aircraft.

8.5.1.10 SEARCH AND RESCUE INFORMATION

For all international flights, the PIC shall have on board the aircraft essential information concerning the search and rescue services in the areas over which they intend to operate the aircraft.

8.5.1.11 PRODUCTION OF AIRCRAFT AND FLIGHT DOCUMENTATION

The PIC shall, within a reasonable time of being requested to do so by a person authorised by the Authority, produce to that person the documentation required to be carried on the aircraft.

8.5.1.12 LOCKING OF FLIGHT DECK COMPARTMENT DOOR: COMMERCIAL AIR TRANSPORT

- (a) The PIC shall ensure that the flight deck compartment door (if installed) is kept closed at all times during passenger-carrying commercial air transport operations, except as necessary to accomplish approved operations or to provide for emergency evacuation.
- (b) No person may operate a passenger carrying aeroplane having a maximum certificated takeoff mass in excess of 45 500 kg or with a passenger capacity greater than 60 unless the flight crew compartment door is closed and locked—
 - (1) From the time all external doors are closed following embarkation; until
 - (2) Any such door is opened for disembarkation; except
 - (3) When necessary to permit access and egress by authorised persons.

8.5.1.13 ADMISSION TO THE FLIGHT DECK: COMMERCIAL AIR TRANSPORT

- (a) No person may admit any person to the flight deck of an aircraft engaged in commercial air transport operations unless the person being admitted is—
 - (1) An operating crew member;
 - (2) A representative of the authority responsible for certification, licensing or inspection, if this is required for the performance of his or her official duties; or
 - (3) Permitted by and carried out in accordance with instructions contained in the Operations Manual.
- (b) The PIC shall ensure that—
 - (1) In the interest of safety, admission on the flight deck does not cause distraction and/or interference with the flight's operations; and
 - (2) All persons carried on the flight deck are made familiar with the relevant safety procedures.

8.5.1.14 ADMISSION OF INSPECTOR TO THE FLIGHT DECK

Whenever, in performing the duties of conducting an inspection, an inspector from the Authority presents a Aviation Safety Inspector's Credential Form to the PIC, the PIC shall give the inspector free and uninterrupted access to the flight deck of the aircraft.

8.5.1.15 DUTIES DURING CRITICAL PHASES OF FLIGHT: COMMERCIAL AIR TRANSPORT

- (a) No flight crew member may perform any duties during a critical phase of flight except those required for the safe operation of the aircraft.
- (b) No PIC may permit a flight crew member to engage in any activity during a critical phase of flight which could distract or interfere with the performance of their assigned duties.

8.5.1.16 MANIPULATION OF THE CONTROLS: COMMERCIAL AIR TRANSPORT

- (a) No PIC may allow an unqualified person to manipulate the controls of an aircraft during commercial air transport operations.
- (b) No person may manipulate the controls of an aircraft during commercial air transport operations unless he or she is qualified to perform the applicable crew member functions and is authorised by the AOC holder.

8.5.1.17 SIMULATED ABNORMAL SITUATIONS IN FLIGHT: COMMERCIAL AIR TRANSPORT

No person may cause or engage in simulated abnormal or emergency situations or the simulation of IMC by artificial means during commercial air transport operations.

8.5.1.18 COMPLETION OF THE TECHNICAL LOGBOOK: COMMERCIAL AIR TRANSPORT

The PIC shall ensure that all portions of the technical logbook are completed at the appropriate points before, during and after flight operations.

8.5.1.19 REPORTING MECHANICAL IRREGULARITIES

- (a) The PIC shall ensure that all mechanical irregularities occurring during flight time are—

- (1) For general aviation operations, entered in the aircraft logbook and disposed of in accordance with the MEL or other approved or prescribed procedure.
- (2) For commercial air transport operations, entered in the technical log of the aeroplane at the end of that flight time.

8.5.1.20 REPORTING OF FACILITY AND NAVIGATION AID INADEQUACIES

Each crew member shall report, without delay, any inadequacy or irregularity of a facility or navigational aid observed in the course of operations to the person responsible for that facility or navigational aid.

8.5.1.21 REPORTING OF HAZARDOUS CONDITIONS

The PIC shall, in accordance with established procedures, report to the appropriate ATC facility, without delay and with enough detail to be pertinent to the safety of other aircraft, any hazardous flight conditions encountered en route, including those associated with meteorological conditions.

8.5.1.22 REPORTING OF INCIDENTS

- (a) *Air traffic report.* The PIC shall submit, without delay, an air traffic incident report whenever an aircraft in flight has been endangered by—
 - (1) A near collision with another aircraft or object;
 - (2) Faulty air traffic procedures or lack of compliance with applicable procedures by ATC or by the flight crew; or
 - (3) A failure of ATC facilities.
- (b) *Birds.* In the event a bird constitutes an in-flight hazard or an actual bird strike the PIC shall, without delay—
 - (1) Inform the appropriate ground station whenever a potential bird hazard is observed; and
 - (2) Submit a written bird strike report after landing.
- (c) *Dangerous Goods.* The PIC shall inform the appropriate ATC facility, if the situation permits, when an in-flight emergency occurs involving dangerous goods on board.
- (d) *Unlawful Interference.* The PIC shall submit a report to the local authorities and to the Authority, without delay, following an act of unlawful interference with the crew members on board an aircraft.

8.5.1.23 ACCIDENT NOTIFICATION

- (a) The PIC shall notify the nearest appropriate authority, by the quickest available means, of any accident involving his or her aircraft that results in serious injury or death of any person, or substantial damage to the aircraft or property.
- (b) The PIC shall submit a report to the Authority of any accident which occurred while he or she was responsible for the flight.

8.5.1.24 OPERATION OF COCKPIT VOICE AND FLIGHT DATA RECORDERS

- (a) The PIC shall ensure that whenever an aircraft has flight recorders installed, those recorders are operationally checked and operated continuously from the instant—
 - (1) For a flight data recorder, the aircraft begins its takeoff roll until it has completed the landing roll, and

- (2) For a cockpit voice recorder, the initiation of the pre-start checklist until the end of the securing aircraft checklist.
- (b) The PIC may not permit a flight data recorder or cockpit voice recorder to be disabled, switched off or erased during flight, unless necessary to preserve the data for an accident or incident investigation.
- (c) In event of an accident or incident, the PIC shall act to preserve the recorded data for subsequent investigation.

8.5.1.25 CREW MEMBER OXYGEN: MINIMUM SUPPLY AND USE

- (a) The PIC shall ensure that breathing oxygen and masks are available to crew members in sufficient quantities for all flights at such altitudes where a lack of oxygen might result in impairment of the faculties of crew members.
- (b) In no case shall the minimum supply of oxygen on board the aircraft be less than that prescribed by the Authority.

Note: The requirements for oxygen supply and use are prescribed in Part 7, 7.1.8.12, Required Instruments and Equipment.

- (c) The PIC shall ensure that all flight crew members, when engaged in performing duties essential to the safe operation of an aircraft in flight, use breathing oxygen continuously at cabin altitudes exceeding 10,000 ft for a period in excess of 30 minutes and whenever the cabin altitude exceeds 13,000 ft.
- (d) One pilot at the controls of a pressurised aircraft in flight shall wear and use an oxygen mask—
 - (1) For general aviation operations, at flight levels above 350, if there is no other pilot at their duty station; and
 - (2) For commercial air transport operations, at flight levels above 250, if there is no other pilot at their duty station.

8.5.1.26 PORTABLE ELECTRONIC DEVICES

- (a) No PIC or SCA may permit any person to use, nor may any person use a portable electronic device on board an aircraft that may adversely affect the performance of aircraft systems and equipment unless—
 - (1) For IFR operations other than commercial air transport, the PIC allows such a device prior to its use; or
 - (2) For commercial air transport operations, the AOC holder makes a determination of acceptable devices and publishes that information in the Operations Manual for the crew members use; and
 - (3) The PIC informs passengers of the permitted use.

8.6 FLIGHT PLANNING AND SUPERVISION

8.6.1 Flight Plans

8.6.1.1 SUBMISSION OF A FLIGHT PLAN

- (a) Prior to operating one of the following, the PIC shall file a VFR or IFR flight plan, as applicable, for—
 - (1) Any flight (or portion thereof) to be provided with air traffic control service;
 - (2) Any IFR flight within advisory airspace;

- (3) Any flight within or into designated areas, or along designated routes, when so required by the appropriate ATC authority to facilitate the provision of flight information, alerting and search and rescue services;
 - (4) Any flight within or into designated areas, or along designated routes, when so required by the appropriate ATC authority to facilitate co-ordination with appropriate military units or with ATC facilities in adjacent states in order to avoid the possible need for interception for the purpose of identification; and
 - (5) Any flight across international borders.
- (b) The PIC shall submit a flight plan before departure or during flight, to the appropriate ATC facility, unless arrangements have been made for submission of repetitive flight plans.
 - (c) Unless otherwise prescribed by the appropriate ATC authority, the PIC shall submit a flight plan to the appropriate ATC facility—
 - (1) At least sixty minutes before departure; or
 - (2) If submitted during flight, at a time which will ensure its receipt by the appropriate ATC facility at least ten minutes before the aircraft is estimated to reach—
 - (i) The intended point of entry into a control area or advisory area; or
 - (ii) The point of crossing an airway or advisory route.

8.6.1.2 AIR TRAFFIC CONTROL FLIGHT PLAN: COMMERCIAL AIR TRANSPORT

No person may takeoff an aircraft in commercial air transport if an ATC flight plan has not been filed, except as authorised by the Authority.

8.6.1.3 CONTENTS OF A FLIGHT PLAN

- (a) Each person filing an IFR or VFR flight plan shall include in it the following information—
 - (1) Aircraft identification;
 - (2) Flight rules and type of flight;
 - (3) Number and type(s) of aircraft and wake turbulence category;
 - (4) Equipment;
 - (5) Departure aerodrome and alternate (if required);
 - (6) Estimated off-block time;
 - (7) Cruising speed(s);
 - (8) Cruising level(s);
 - (9) Route to be followed;
 - (10) Destination aerodrome and total estimated elapsed time;
 - (11) alternate (if required);
 - (12) Fuel endurance;
 - (13) Total number of persons on board;
 - (14) Emergency and survival equipment;
 - (15) For each flight dispatched as an ETOPS flight, the ETOPS diversion time for which the flight is dispatched; and
 - (16) Other information.

Note: Whatever the purpose for which it is submitted, a flight plan shall contain information, as applicable, on relevant items up to and including "alternate aerodrome(s)" regarding the whole route or the portion thereof for which the flight plan is submitted.

8.6.1.4 PLANNED RE-CLEARANCE

If during flight planning a person determines that there is a possibility, depending on fuel endurance, that a flight may be able to change destinations and still complies with minimum fuel supply planning requirements, that person shall notify the appropriate ATC facility of this possibility when the flight plan is submitted.

Note: The intent of this provision is to facilitate a new clearance to a revised destination, normally beyond the filed destination aerodrome.

8.6.1.5 CHANGES TO A FLIGHT PLAN

- (a) When a change occurs to a flight plan submitted for an IFR flight or a VFR flight operated as a controlled flight, the PIC shall report that change as soon as practicable to the appropriate ATC facility.
- (b) For VFR flights other than those operated as controlled flight, the PIC shall report significant changes to a flight plan as soon as practicable to the appropriate ATC facility.

Note: Information submitted prior to departure regarding fuel endurance or total number of persons carried on board, if incorrect at time of departure, constitutes a significant change and shall be reported.

8.6.1.6 CLOSING A FLIGHT PLAN

- (a) The PIC shall make a report of arrival either in person or by radio to the appropriate ATC facility at the earliest possible moment after landing at the destination aerodrome, unless ATC automatically closes a flight plan.
- (b) When a flight plan has been submitted for a portion of a flight, but not the arrival at destination, the PIC shall close that flight plan en route with the appropriate ATC facility.
- (c) When no ATC facility exists at the arrival aerodrome, the PIC shall contact the nearest ATC facility to close the flight plan as soon as practicable after landing and by the quickest means available.
- (d) When communication facilities at the arrival aerodrome are known to be inadequate and alternate arrangements for the handling of arrival reports on the ground are not available, the following actions shall be taken. Immediately prior to landing the aircraft shall, if practicable, transmit to the appropriate air traffic services unit, a message comparable to an arrival report, where such a report is required. Normally this transmission shall be made to the aeronautical station serving the air traffic services unit in charge of the flight information region in which the aircraft is operated.
- (e) Pilots shall include the following elements of information in their arrival reports—
 - (1) Aircraft identification;
 - (2) Departure aerodrome;
 - (3) Destination aerodrome (only in the case of a diversionary landing);
 - (4) Arrival aerodrome; and
 - (5) Time of arrival.

8.6.2 Flight Planning and Preparation

8.6.2.1 AIRCRAFT AIRWORTHINESS AND SAFETY PRECAUTIONS

- (a) The PIC may not operate a civil aircraft in flight until satisfied that—
 - (1) The aircraft is airworthy, duly registered and that appropriate certificates are aboard the aircraft;
 - (2) The instruments and equipment installed in the aircraft are appropriate, taking into account the expected flight conditions; and

- (3) Any necessary maintenance has been performed and a maintenance release, if applicable, has been issued in respect to the aircraft.
- (b) For commercial air transport operations, the PIC shall certify by signing the aircraft technical log that he or she is satisfied that the requirements of paragraph (a) have been met for a particular flight.

8.6.2.2 ADEQUACY OF OPERATING FACILITIES

- (a) No person may commence a flight unless it has been determined by every reasonable means available that the ground and/or water areas and facilities available and directly required for such flight and for the safe operation of the aircraft, are adequate, including communication facilities and navigation aids.
- (b) Each AOC holder must show that each route it submits for approval has enough airports that are properly equipped and adequate for the proposed operation, considering such items as size, surface, obstructions, facilities, public protection, lighting, navigational and communications aids, and ATC.

Note: "Reasonable means" denotes use, at the point of departure, of information available to the PIC either through official information published by the aeronautical information services or readily obtainable in other sources.

8.6.2.3 WEATHER REPORTS AND FORECASTS

- (a) Before commencing a flight, the PIC shall be familiar with all available meteorological information appropriate to the intended flight.
- (b) The PIC shall include, during preparation for a flight away from the vicinity of the place of departure, and for every flight under the instrument flight rules—
 - (1) A study of available current weather reports and forecasts; and
 - (2) The planning of an alternative course of action to provide for the eventuality that the flight cannot be completed as planned, because of weather conditions.

8.6.2.4 WEATHER LIMITATIONS FOR VFR FLIGHTS

No person will commence a flight to be conducted in accordance with VFR unless available current meteorological reports, or a combination of current reports and forecasts, indicate that the meteorological conditions along the route, or that part of the route to be flown under VFR, will, at the appropriate time, allow VFR operations.

8.6.2.5 IFR DESTINATION AERODROMES

- (a) For IFR flight planning purposes, no person may commence an IFR flight unless the available information indicates that the weather conditions at the aerodrome of intended landing and, if required, at least one suitable alternate at the estimated time of arrival, will be at or above the—
 - (1) Minimum ceiling and visibility values for the standard instrument approach procedure to be used; or
 - (2) Minimum operating altitude, if no instrument approach procedure is to be used, that would allow a VMC descent to the aerodrome.

Note: A partial exception is granted for commercial air transport IFR flight planning, to the effect that the weather at the destination does not have to be at or above the approach minima to release and commence a flight, as long as the designated alternate aerodrome meets the IFR weather selection criteria.

8.6.2.6 IFR DESTINATION ALTERNATE REQUIREMENT

- (a) No person may commence an IFR flight in an aircraft without at least one destination alternate aerodrome listed in the flight plan unless—
 - (1) The planned flight time does not exceed 6 hours, and
 - (2) There is a standard instrument approach procedure prescribed for the aerodrome of intended landing by the jurisdictional authorities; and
 - (3) Two separate runways are available and usable at the destination; and
 - (4) Available current meteorological information indicates that the following meteorological conditions will exist from two hours before to two hours after the estimated time of arrival—
 - (i) The ceiling will be at least 600 m (2,000 ft) or circling height + 150 m (500 ft), whichever is greater; and
 - (ii) Visibility of at least 5.5 km or of 4 km more than the minimum associated with the procedure.
- (b) The ceiling and visibility requirements of paragraph (a) may be reduced upon approval of the Authority for—
 - (1) Helicopters; or
 - (2) Commercial air transport where no suitable destination alternate exists.

8.6.2.7 IFR ALTERNATE AERODROME SELECTION CRITERIA

- (a) If alternate minimums are published, no PIC may designate an alternate aerodrome in an IFR flight plan unless the current available forecast indicates that the meteorological conditions at that alternate at the ETA will be at or above those published alternate minimums.
- (b) If alternate minimums are not published, and if there is no prohibition against using the aerodrome as an IFR planning alternate, each PIC shall ensure that the meteorological conditions at that alternate at the ETA will be at or above—
 - (1) For a precision approach procedure, a ceiling of at least 600 feet and visibility of not less than 2 statute miles; or
 - (2) For a non-precision approach procedure, a ceiling of at least 800 feet and visibility of not less than 2 statute miles.
- (c) For ETOPS up to and including 180 minutes, no person may list an airport as an ETOPS Alternate Airport in a dispatch or flight release if the time needed to fly to that airport (at the approved one-engine inoperative cruise speed under standard conditions in still air) would exceed the approved time for the airplane's most limiting ETOPS Significant System (including the airplane's most limiting fire suppression system time for those cargo and baggage compartments required by regulation to have fire-suppression systems) minus 15 minutes.
- (d) For ETOPS beyond 180 minutes, no person may list an airport as an ETOPS Alternate Airport in a dispatch or flight release if the time needed to fly to that airport:
 - (1) at the all engine operating cruise speed, corrected for wind and temperature, exceeds the airplane's most limiting fire suppression system time minus 15 minutes for those cargo and baggage compartments required by regulation to have fire suppression systems (except as provided in paragraph (c) of this section), or
 - (2) at the one-engine-inoperative cruise speed, corrected for wind and temperature, exceeds the airplane's most limiting ETOPS Significant System time (other than the airplane's most limiting fire suppression system time minus 15 minutes for those cargo and baggage compartments required by regulation to have fire-suppression systems).
- (e) For turbine-engine powered airplanes with more than two engines, the AOC holder needs not meet paragraph (d)(1) of this section until February 15, 2013.

8.6.2.8 OFF-SHORE ALTERNATES FOR HELICOPTER OPERATIONS

- (a) No person may designate an offshore alternate landing site when it is possible to carry enough fuel to have an on-shore alternate landing site.

Note: The selection of offshore alternates should be exceptional cases, the details of which have been approved by the Authority, and should not include payload enhancement in IMC.

- (b) Each person selecting an off-shore alternate landing site shall consider the following:
- (1) Until the point of no return, using an on-shore alternate. The offshore alternate may be used only after a point of no return.
 - (2) Attaining one engine inoperative performance capability prior to arrival at the alternate.
 - (3) Guaranteeing helideck availability.
 - (4) The weather information at the helideck shall be available from a source approved by the Authority.
 - (5) For IFR operations, an instrument approach procedure shall be prescribed and available.

Note: The landing technique specified in the flight manual following control system failure may preclude the selection of certain helidecks as alternate aerodromes. The mechanical reliability of critical control systems shall be taken into account when determining the suitability and necessity for an offshore alternate.

8.6.2.9 TAKEOFF ALTERNATE AERODROMES: COMMERCIAL AIR TRANSPORT OPERATIONS

- (a) No person may release or takeoff an aircraft without a suitable takeoff alternate specified in the flight release if it would not be possible to return to the aerodrome of departure.
- (b) Each operator shall ensure that each takeoff alternate specified shall be located within—
- (1) For two-engine aircraft, one hour flight time at one-engine-inoperative cruise speed unless the aircraft and crews are authorised for ETOPS; or
 - (2) For three or four-engine aircraft, two hours flight time at one-engine-inoperative cruise speed.

Note: All calculations are based on the one-engine-inoperative cruising speed according to the AFM in still air conditions based on the actual takeoff mass.

8.6.2.10 MAXIMUM DISTANCE FROM AN ADEQUATE AERODROME FOR TWO-ENGINED AEROPLANES WITHOUT AN ETOPS APPROVAL

- (a) Unless specifically approved by the Authority (ETOPS Approval), an AOC holder shall not operate a two-engined aeroplane over a route which contains a point further from an adequate aerodrome than, in the case of—
- (1) Large, turbine engine powered aeroplanes the distance flown in 60 minutes at the one-engine-inoperative cruise speed determined in accordance with paragraph (b) with either:
 - (i) A maximum approved passenger seating configuration of 20 or more; or
 - (ii) A maximum take-off mass of 45360kg or more,
 - (2) Turbine engine powered aeroplanes, not mentioned in (1), the distance flown in 120 minutes at the one-engine-inoperative cruise speed determined in accordance with paragraph (b), or 180 minutes for turbo-jet aeroplanes, if approved by the Authority.
 - (3) Reciprocating engine powered aeroplanes:
 - (i) The distance flown in 120 minutes at the one-engine-inoperative cruise speed determined in accordance with paragraph (b); or
 - (ii) 300 nautical miles, whichever is less.
- (b) An AOC holder shall determine a speed for the calculation of the maximum distance to an adequate aerodrome for each two-engined aeroplane type or variant operated, not exceeding V_{mo} based upon the true airspeed that the aeroplane can maintain with one-engine-inoperative under the following conditions:

- (1) International Standard Atmosphere;
 - (2) Level flight:
 - (i) For turbine engine powered aeroplanes at:
 - (A) FL 170; or
 - (B) At the maximum flight level to which the aeroplane, with one engine inoperative, can climb, and maintain, using the gross rate of climb specified in the AFM, whichever is less.
 - (ii) For propeller driven aeroplanes
 - (A) FL 80; or
 - (B) At the maximum flight level to which the aeroplane, with one engine inoperative, can climb, and maintain, using the gross rate of climb specified in the AFM, whichever is less.
 - (3) Maximum continuous thrust or power on the remaining operating engine;
 - (4) An aeroplane mass not less than that resulting from:
 - (i) Take-off at sea-level at maximum take-off mass until the time elapsed since take-off is equal to the applicable threshold prescribed in paragraph (a);
 - (ii) All engines climb to the optimum long range cruise altitude until the time elapsed since take-off is equal to the applicable threshold prescribed in subparagraph (a); and
 - (iii) All engines cruise at the long range cruise speed at this altitude until the time elapsed since take-off is equal to the applicable threshold prescribed in paragraph (a).
- (c) An AOC holder shall ensure that the following data, specific to each type or variant, is included in the Operations Manual:
- (1) The one-engine-inoperative cruise speed determined in accordance with paragraph (b); and
 - (2) The maximum distance from an adequate aerodrome determined in accordance with paragraphs (a) and (b).

Note: The speeds and altitudes (flight levels) specified above are only intended to be used for establishing the maximum distance from an adequate aerodrome.

- (d) No AOC holder may operate a turbine-engine-powered airplane over a route that contains a point-
- (1) Farther than a flying time from an Adequate Airport (at a one-engine-inoperative cruise speed under standard conditions in still air) of 60 minutes for a two-engine airplane or 180 minutes for a passenger-carrying airplane with more than two engines;
 - (2) Within the North Polar Area; or
 - (3) Within the South Polar Area.
- (e) Unless authorized by the CASAS based on the character of the terrain, the kind of operation, or the performance of the airplane to be used, no certificate holder may operate a reciprocating-engine-powered airplane over a route that contains a point farther than 60 minutes flying time (at a one-engine-inoperative cruise speed under standard conditions in still air) from an Adequate Airport.

8.6.2.11 EXTENDED RANGE OPERATIONS WITH TWIN-ENGINED AEROPLANES AND POLAR OPERATIONS

- (a) An AOC holder shall not conduct operations beyond the threshold distance determined in accordance with 8.6.2.10 unless approved to do so by the Authority.
- (b) In requesting ETOPS approval, each AOC holder shall show to the satisfaction of the Authority that:
 - (1) The airworthiness certification of the aeroplane type;
 - (2) The reliability of the propulsion system;
 - (3) The AOC holder's maintenance procedures, operating practices, flight dispatch procedures; and

- (4) Crew training programmes;

for two engined aeroplanes are consistent with the level of safety required for current extended range operations with three and four engined turbine-powered aeroplanes.

- (c) Prior to conducting an ETOPS flight, an AOC holder shall ensure that a suitable ETOPS enroute alternate is available, within either the approved diversion time or a diversion time based on MEL generated serviceability status of the aeroplane, whichever is shorter.

8.6.2.12 EN ROUTE ALTERNATE AERODROMES: ETOPS OPERATIONS

- (a) The PIC shall ensure that the required en route alternates for ETOPS are selected and specified in ATC flight plans in accordance with the ETOPS diversion time approved by the Authority.
- (b) No person may list an airport as an ETOPS Alternate Airport in a dispatch or flight release unless, when it might be used (from the earliest to the latest possible landing time)—
- (1) The appropriate weather reports or forecasts, or any combination thereof, indicate that the weather conditions will be at or above the ETOPS Alternate Airport minima specified in the AOC holder's operations specifications; and
 - (2) The field condition reports indicate that a safe landing can be made.

Note: The forecast weather criteria used in the selection of alternate aerodromes for IFR flight will also be used for the selection of ETOPS alternates.

Approach Facility Configuration (see Note 2)	Alternate Airport IFR Weather Minimum Ceiling (see Note 3)	Alternate Airport IFR Weather Minimum Visibility (see Note 4)
For airports with at least one operational navigational facility providing a straight-in non-precision approach procedure, or Category I precision approach, or, when applicable, a circling maneuver from an instrument approach procedure.	Add 400 ft to the MDA(H) or DA(H), as applicable.	Add 1 sm or 1 600m to the landing minimum.
For airports with at least two operational navigational facilities, each providing a straight-in approach procedure to different suitable runways.	Add 200 ft to the higher DA(H) or MDA(H) of the two approaches used.	Add 1/2 sm or 700m to the higher authorized landing minimum of the two approaches used.
One useable authorized Category II ILS IAP.	300 feet	3/4 sm (1200 m) or RVR 4000 (1200 m)
One useable authorized category III ILS Instrument Approach Procedure (IAP).	200 feet	1/2 sm (700 m) or RVR 1800 feet (550 m)

Note 1: Runways on the same aerodrome are considered to be separate runways when they are separate landing surfaces which may overlay or cross such that if one of the runways is blocked, it will not prevent the planned type of operations on the other runway and each of the landing surfaces has a separate approach based on a separate aid.

Note 2: When determining the usability of an IAP, wind plus gust must be forecast to be within operating limits, including reduced visibility limits, and should be within the manufacturer's maximum demonstrated crosswind value.

Note 3: Conditional forecast elements need not be considered, except that a PROB40 or TEMPO condition below

the lowest applicable operating minima must be taken into account.

Note 4: When dispatching under the provisions of the MEL, those MEL limitations affecting instrument approach minima must be considered in determining ETOPS alternate minima.

- (c) No person may dispatch or release an airplane for an ETOPS flight unless enough ETOPS Alternate Airports are listed in the dispatch or flight release such that the airplane remains within the authorized ETOPS maximum diversion time. In selecting these ETOPS Alternate Airports, the certificate holder must consider all adequate airports within the authorized ETOPS diversion time for the flight that meet the standards of this part.
- (d) Once a flight is en route, the weather conditions at each ETOPS Alternate Airport must meet the requirements of 8.6.2.19 (c).
- (e) No person may list an airport as an ETOPS Alternate Airport in the dispatch or flight release unless that airport meets the public protection requirements of IS 9.3.1.20
- (f) Except as provided in paragraph (g) of this section, the following rescue and fire fighting service (RFFS) must be available at each airport listed as an ETOPS Alternate Airport in a dispatch or flight release.
 - (1) For ETOPS up to 180 minutes, each designated ETOPS Alternate Airport must have RFFS equivalent to that specified by ICAO as Category 4, or higher.
 - (2) For ETOPS beyond 180 minutes, each designated ETOPS Alternate Airport must have RFFS equivalent to that specified by ICAO Category 4, or higher. In addition, the aircraft must remain within the ETOPS authorized diversion time from an Adequate Airport that has RFFS equivalent to that specified by ICAO Category 7, or higher.
- (g) If the equipment and personnel required in paragraph (f) of this section are not immediately available at an airport, the certificate holder may still list the airport on the dispatch or flight release if the airport's RFFS can be augmented to meet paragraph (f) of this section from local fire fighting assets. A 30-minute response time for augmentation is adequate if the local assets can be notified while the diverting airplane is en route. The augmenting equipment and personnel must be available on arrival of the diverting airplane and must remain as long as the diverting airplane needs RFFS.

8.6.2.13 FUEL, OIL, AND OXYGEN PLANNING AND CONTINGENCY FACTORS

- (a) No person may commence a flight unless he or she takes into account the fuel, oil, and oxygen needed to ensure the safe completion of the flight, including any reserves to be carried for contingencies.
- (b) Each person computing the required minimum fuel supply shall ensure that additional fuel, oil, and oxygen are carried to provide for the increased consumption that would result from any of the following contingencies—
 - (1) Expected winds or other meteorological conditions;
 - (2) Possible variations in ATC routings;
 - (3) Anticipated traffic delays;
 - (4) A complete instrument approach procedure and possible missed approach at destination;
 - (5) Loss of pressurisation en route;
 - (6) Loss of one power-unit en route; and
 - (7) Any other conditions that may delay landing of the aircraft or increase fuel and oil consumption.
- (c) No PIC may commence a flight to an aerodrome where no suitable alternate aerodrome is available because the destination aerodrome is isolated, without enough reserve fuel for two additional hours flight at normal cruise consumption, at 1,500 feet above the aerodrome.
- (d) The Authority may grant specific approval for commercial air transport operations to isolated aerodromes without regard to consumption requirement of paragraph (d).

Note: If the Authority requires that fuel, in addition to any other requirement herein, is necessary on a particular route or flight operation in the interest of safety, this additional fuel will be included in the minimum fuel supply for that route.

8.6.2.14 MINIMUM FUEL SUPPLY FOR VFR FLIGHTS

- (a) No person may commence a flight in an aeroplane under VFR unless, considering the wind and forecast weather conditions, there is enough fuel to fly to the first point of intended landing and, assuming normal cruising speed—
 - (1) For flights during the day, for at least 30 minutes thereafter; or
 - (2) For flights at night, for at least 45 minutes thereafter; and
 - (3) For international flights, for at least an additional 15% of the total flight time calculated for cruise flight.
- (b) No person may commence a flight in a helicopter under VFR unless (considering the wind and forecast weather conditions) there is enough fuel to fly to the first point of intended landing and, assuming normal cruising speed—
 - (1) For 20 minutes thereafter; or
 - (2) For international flights, for at least an additional 10% of the total flight time calculated.

8.6.2.15 MINIMUM FUEL SUPPLY FOR IFR FLIGHTS

- (a) No person may commence a flight under IFR unless there is enough fuel supply, considering weather reports and forecasts, to—
 - (1) Fly to the first point of intended landing, execute an instrument approach; and
 - (2) Execute a missed approach and fly from that aerodrome to the most critical (in terms of fuel consumption) alternate aerodrome, if required; and
 - (3) Fly thereafter at normal cruising speed:
 - (i) In a propeller-driven aeroplane, for 45 minutes.
 - (ii) In a rotorcraft, turbojet or turboprop aeroplane, for 30 minutes in a holding pattern at 450 m (1500 ft) above the aerodrome, plus a reserve for contingencies specified by the operator and approved by the Authority.
 - (4) Approach and land.
- (b) For IFR flights to isolated aerodromes, the 2-hour minimum reserve specified in 8.6.2.13 applies, except paragraph (e) does not apply to commercial air transport operations unless specifically approved by the Authority.
- (c) No person may dispatch or release for flight a turbine-engine powered airplane with more than two engines for a flight more than 90 minutes (with all engines operating at cruise power) from an Adequate Airport unless the following fuel supply requirements are met:
 - (1) The airplane has enough fuel to meet the requirements of 8.6.2.15 (a)(b);
 - (2) The airplane has enough fuel to fly to the Adequate Airport—
 - (i) Assuming a rapid decompression at the most critical point;
 - (ii) Assuming a descent to a safe altitude in compliance with the oxygen supply requirements of 8.5.1.25 and 8.9.1.4; and
 - (iii) Considering expected wind and other weather conditions.
 - (3) The airplane has enough fuel to hold for 15 minutes at 1500 feet above field elevation and conduct a normal approach and landing.

- (d) No person may dispatch or release for flight an ETOPS flight unless, considering wind and other weather conditions expected, it has the fuel otherwise required by this part and enough fuel to satisfy each of the following requirements:
- (1) Fuel to fly to an ETOPS Alternate Airport.
 - (i) Fuel to account for rapid decompression and engine failure. The airplane must carry the greater of the following amounts of fuel:
 - (A). Fuel sufficient to fly to an ETOPS Alternate Airport assuming a rapid decompression at the most critical point followed by descent to a safe altitude in compliance with the oxygen supply requirements of 8.5.1.25 and 8.9.1.4;
 - (B). Fuel sufficient to fly to an ETOPS Alternate Airport (at the one-engine-inoperative cruise speed) assuming a rapid decompression and a simultaneous engine failure at the most critical point followed by descent to a safe altitude in compliance with the oxygen requirements of 8.5.1.25 and 8.9.1.4; or
 - (C). Fuel sufficient to fly to an ETOPS Alternate Airport (at the one engine inoperative cruise speed) assuming an engine failure at the most critical point followed by descent to the one engine inoperative cruise altitude.
 - (ii) Fuel to account for errors in wind forecasting. In calculating the amount of fuel required by paragraph (d)(1)(i) of this section, the certificate holder must increase the actual forecast wind speed by 5% (resulting in an increase in headwind or a decrease in tailwind) to account for any potential errors in wind forecasting. If a certificate holder is not using the actual forecast wind based on a wind model accepted by the CASAS, the airplane must carry additional fuel equal to 5% of the fuel required for paragraph (d)(1)(i) of this section, as reserve fuel to allow for errors in wind data.
 - (iii) Fuel to account for icing. In calculating the amount of fuel required by paragraph (d)(1)(i) of this section (after completing the wind calculation in paragraph (d)(1)(ii) of this section), the certificate holder must ensure that the airplane carries the greater of the following amounts of fuel in anticipation of possible icing during the diversion:
 - (A). Fuel that would be burned as a result of airframe icing during 10 percent of the time icing is forecast (including the fuel used by engine and wing anti-ice during this period).
 - (B). Fuel that would be used for engine anti-ice, and if appropriate wing anti-ice, for the entire time during which icing is forecast.
 - (iv) Fuel to account for engine deterioration. In calculating the amount of fuel required by paragraph (d)(1)(i) of this section (after completing the wind calculation in paragraph (d)(1)(ii) of this section), the airplane also carries fuel equal to 5% of the fuel specified above, to account for deterioration in cruise fuel burn performance unless the certificate holder has a program to monitor airplane in-service deterioration to cruise fuel burn performance.
 - (2) Fuel to account for holding, approach, and landing. In addition to the fuel required by paragraph (d)(1) of this section, the airplane must carry fuel sufficient to hold at 1500 feet above field elevation for 15 minutes upon reaching an ETOPS Alternate Airport and then conduct an instrument approach and land.
 - (3) Fuel to account for APU use. If an APU is a required power source, the certificate holder must account for its fuel consumption during the appropriate phases of flight.

8.6.2.16 FLIGHT PLANNING DOCUMENT DISTRIBUTION AND RETENTION: COMMERCIAL AIR TRANSPORT

- (a) For commercial air transport operations, the PIC shall complete and sign the following flight preparation documents prior to departure:
 - (1) An operational flight plan, including NOTAMs and weather pertinent to the flight planning decisions regarding minimum fuel supply, en route performance, and destination and alternate aerodromes.

- (2) A load manifest, showing the distribution of the load, centre of gravity, takeoff and landing mass and compliance with maximum operating mass limitations, and performance analysis.
- (3) An applicable technical log page, if mechanical irregularities were entered after a previous flight, maintenance or inspection functions were performed or a maintenance release was issued at the departure aerodrome.
- (b) No person may takeoff an aircraft in commercial air transport unless all flight release documents, signed by the PIC, are retained and available at the point of departure.
- (c) The PIC shall carry a copy of the documents specified in paragraph (a) on the aircraft to the destination aerodrome.
- (d) Completed flight preparation documents shall be kept by the AOC holder for a period of at least three months.

Note: These documents are in addition to those specified in Subpart 8.2 for all aircraft operations.

Note: The Authority may approve a different retention location where all documents can be available for subsequent review.

8.6.2.17 AIRCRAFT LOADING, MASS AND BALANCE

- (a) No person may operate an aircraft unless all loads carried are properly distributed and safely secured.
- (b) No person may operate an aircraft unless the calculations for the mass of the aeroplane and centre of gravity location indicate that the flight can be conducted safely, taking into account the flight conditions expected.

Note: When load masters, load planners or other qualified personnel are provided by the AOC holder in a commercial air transport operation, the PIC may delegate these responsibilities, but shall ascertain that proper loading procedures are followed.

- (c) For commercial air transport operations, no PIC may commence a flight unless the PIC is satisfied that the loading and mass and balance calculations contained in the load manifest are accurate and comply with the aircraft limitations.

8.6.2.18 MAXIMUM ALLOWABLE WEIGHTS TO BE CONSIDERED ON ALL LOAD MANIFESTS

- (a) The PIC shall ensure that the maximum allowable mass for a flight does not exceed the maximum allowable takeoff mass—
 - (1) For the specific runway and conditions existing at the takeoff time; and
 - (2) Considering anticipated fuel and oil consumption that allows compliance with applicable en route performance, landing mass, and landing distance limitations for destination and alternate aerodromes.

8.6.2.19 FLIGHT RELEASE REQUIRED: COMMERCIAL AIR TRANSPORT

- (a) No person may start a flight under a flight following system without specific authority from the person authorised by the AOC holder to exercise operational control over the flight.
- (b) No person may commence a passenger-carrying flight in commercial air transport for which there is a published schedule, unless a qualified person authorised by the AOC holder to perform operational control functions has issued a flight release for that specific operation or series of operations.
- (c) No person may allow a flight to continue beyond the ETOPS Entry Point unless—
 - (1) Except as provided in paragraph (d) of this section, the weather conditions at each ETOPS Alternate Airport required by 8.6.2.12 are forecast to be at or above the operating minima for that airport in the certificate

- holder's operations specifications when it might be used (from the earliest to the latest possible landing time);
and
- (2) All ETOPS Alternate Airports within the authorized ETOPS maximum diversion time are reviewed and the flight crew advised of any changes in conditions that have occurred since dispatch.
 - (d) If paragraph (c)(1) of this section cannot be met for a specific airport, the dispatch or flight release may be amended to add an ETOPS Alternate Airport within the maximum ETOPS diversion time that could be authorized for that flight with weather conditions at or above operating minima.
 - (e) Before the ETOPS Entry Point, the pilot in command for a supplemental operator or an FOO for a operator must use company communications to update the flight plan if needed because of a re-evaluation of aircraft system capabilities.
 - (f) No person may change an original destination or alternate airport that is specified in the original dispatch or flight release to another airport while the aircraft is en route unless the other airport is authorized for that type of aircraft and the appropriate requirements of this Part are met at the time of redispach or amendment of the flight release.
 - (g) Each person who amends a dispatch or flight release en route shall record that amendment.
 - (h) The dispatch release may be in any form but must contain for each flight dispatched as an ETOPS flight, the ETOPS diversion time for which the flight is dispatched.

8.6.2.20 OPERATIONAL FLIGHT PLAN: COMMERCIAL AIR TRANSPORT

- (a) No person may commence a flight unless the operational flight plan has been signed by the PIC.
- (b) A PIC may sign the operational flight plan only when he or she and the person authorised by the operator to exercise operational control have determined that the flight can be safely completed.

Note: The operational flight plan shall include the routing and fuel calculations, with respect to the meteorological and other factors expected, to complete the flight to the destination and all required alternates.

- (c) The PIC signing the operational flight plan shall have access to the applicable flight planning information for fuel supply, alternate aerodromes, weather reports and forecasts and NOTAMs for the routing and aerodrome.
- (d) No person may continue a flight from an intermediate aerodrome without a new operational flight plan if the aircraft has been on the ground more than 6 hours.
- (e) A copy of the operational flight plan shall be filed with the operator or a designated agent, or, if these procedures are not possible, it shall be left with the aerodrome authority or on record in a suitable place at the point of departure.

8.7 AIRCRAFT OPERATING AND PERFORMANCE LIMITATIONS

8.7.1 All Aircraft

8.7.1.1 APPLICABILITY

This Section prescribes the operating and performance limitations for all civil aircraft.

8.7.1.2 GENERAL

- (a) No person may operate an aircraft that—

- (1) Exceeds its designed performance limitations for any operation, as established by the State of Registry;
- (2) Exceeds operating limitations contained in the aircraft's flight manual, or its equivalent; or
- (3) Exceeds the terms of its certificate of airworthiness.

8.7.1.3 AIRCRAFT PERFORMANCE CALCULATIONS

- (a) Each operator shall ensure that the performance data contained in the AFM, RFM, or other authorised source is used to determine compliance with the appropriate requirements of Subpart 8.7.
- (b) When applying performance data, each person performing calculations shall account for the aircraft configuration, environmental conditions, and the operation of any system or systems which may have an adverse effect on performance.

8.7.1.4 GENERAL MASS AND OBSTRUCTION CLEARANCE LIMITATIONS

- (a) No person may takeoff an aircraft without ensuring that the maximum allowable mass for a flight does not exceed the maximum allowable takeoff or landing mass, or any applicable en route performance or landing distance limitations considering the—
 - (1) Condition of the takeoff and landing areas to be used;
 - (2) Gradient of runway to be used (landplanes only);
 - (3) Pressure altitude;
 - (4) Ambient temperature;
 - (5) Current and forecast winds; and
 - (6) Know conditions (e.g., atmospheric and aircraft configuration) which may adversely affect performance; and
 - (7) Compliance with noise certification standards if required.
- (b) No person may takeoff an aircraft at a mass that, assuming normal engine operation, cannot safely clear all obstacles during all phases of flight, including all points along the intended en-route path or any planned diversions.

8.7.2 Aircraft Used in Commercial Air Transport

8.7.2.1 APPLICABILITY

This Section prescribes aircraft performance and operating limitations for aircraft used in commercial air transport operations, except those aircraft holding a special authority or waiver by the Authority which exempt them from specific operating and performance limitations.

8.7.2.2 GENERAL

- (a) Each person operating an aircraft engaged in commercial air transport shall comply with the provisions of Section 8.7.2.
- (b) The Authority may authorise deviations from the requirements of Section 8.7.2 if special circumstances make a literal observance of a requirement unnecessary for safety.
- (c) Where full compliance with the requirements of Section 8.7.2 cannot be shown due to specific design characteristics (e.g., seaplanes, airships, or supersonic aircraft), the operator shall apply approved performance standards that ensure a level of safety not less restrictive than those of relevant requirements of this Section.

- (d) No person may operate a single-engine aircraft used for revenue passenger carrying operations unless that aircraft is continually operated—
 - (1) In daylight, VFR, excluding over the top operations; and
 - (2) over routes and diversions there from that permit a safe forced landing to be executed in the event of an engine failure.
- (e) No person may operate a multiengine aircraft used for revenue passenger carrying operations that is unable to comply with any of the performance limitations of subsections 8.7.2.4 through 8.7.2.8 unless that aircraft is continually operated—
 - (1) In daylight;
 - (2) In VFR, excluding over the top operations; and
 - (3) At a mass that will allow it to climb, with the critical engine inoperative, at least 50 feet a minute when operating at the MEAs of the intended route or any planned diversion, or at 5,000 feet MSL, whichever is higher.
- (f) Multiengine aircraft that are unable to comply with paragraph (e)(3) are, for the purpose of this Section, considered to be a single engine aircraft and shall comply with the requirements of paragraph (d).
- (g) Aeroplane operating procedures for noise abatement should comply with the provisions of PANS-OPS (Doc 8168), Volume I, Part V.

Note: Noise abatement procedures specified by an operator for any one aeroplane type should be the same for all aerodromes.

- (h) Except for a passenger-carrying airplane with more than two engines manufactured prior to February 17, 2015 and except for a two-engine airplane that, when used in ETOPS, is only used for ETOPS of 75 minutes or less, no AOC holder may conduct ETOPS unless the airplane has been type design approved for ETOPS and each airplane used in ETOPS complies with its CMP document as follows:
 - (i) For a two-engine airplane approved for ETOPS, the CMP document for that model airplane-engine combination issued in accordance with State of Design approval.
 - (ii) For an airplane with more than 2 engines manufactured on or after February 17, 2015, the CMP document for that model airplane-engine combination issued in accordance with State of Design approval.

8.7.2.3 AIRCRAFT PERFORMANCE CALCULATIONS

- (a) For every commercial air transport flight a mass and balance calculation shall be performed on a form approved by the Authority and signed by the Pilot in Command in order to be able to determine aircraft operating and performance calculations.

Note: A copy of the mass and balance form shall be filed with the operator or a designated agent, or, if these procedures are not possible, it shall be left with the aerodrome authority or on record in a suitable place at the point of departure..
- (b) No person may takeoff an aircraft used in commercial air transport without ensuring that the applicable operating and performance limitations required for this Section can be accurately computed based on the AFM, RFM, or other data source approved by the Authority.
- (c) Each person calculating performance and operating limitations for aircraft used in commercial air transport shall ensure that performance data used to determine compliance with this Section can, during any phase of flight, accurately account for—
 - (i) Any reasonably expected adverse operating conditions that may affect aircraft performance;
 - (ii) One engine failure for aircraft having two engines, if applicable; and
 - (iii) Two engine failure for aircraft having three or more engines, if applicable.
- (d) When calculating the performance and limitation requirements of subsections 8.7.2.4 to 8.7.2.8, each person performing the calculation shall, for all engines operating and for inoperative engines, accurately account for—

- (1) In all phases of flight—
 - (i) The effect of fuel and oil consumption on aircraft mass;
 - (ii) The effect of fuel consumption on fuel reserves resulting from changes in flight paths, winds, and aircraft configuration;
 - (iii) The effect of fuel jettisoning on aircraft mass and fuel reserves, if applicable and approved;
 - (iv) The effect of any ice protection system, if applicable and weather conditions require its use;
 - (v) Ambient temperatures and winds along intended route and any planned diversion;
 - (vi) Flight paths and minimum altitudes required to remain clear of obstacles.
- (2) During takeoff and landing—
 - (i) The condition of the takeoff runway or area to be used, including any contaminants (e.g., water, slush, snow, ice);
 - (ii) The gradient of runway to be used;
 - (iii) The runway length including clearways and stopways, if applicable;
 - (iv) Pressure altitudes at takeoff and landing sites;
 - (v) Current ambient temperatures and winds at takeoff;
 - (vi) Forecast ambient temperatures and winds at each destination and planned alternate landing site;
 - (vii) The ground handling characteristics (e.g., braking action) of the type of aircraft; and
 - (viii) Landing aids and terrain that may affect the takeoff path, landing path, and landing roll.

Note: Where conditions are different from those on which the performance is based, compliance may be determined by interpolation or by computing the effects of changes in the specific variables, if the results of the interpolation or computations are substantially as accurate as the results of direct tests.

Note: To allow for wind effect, takeoff and landing data based on still air may be corrected by taking into account not more than 50 percent of any reported headwind component and not less than 150 percent of any reported tailwind component, and landing data based on.

8.7.2.4 TAKEOFF LIMITATIONS

- (a) *Aeroplanes.* No person may takeoff an aeroplane used in commercial air transport unless the following requirements are met when determining the maximum permitted take-off mass:
 - (1) The takeoff run shall not be greater than the length of the runway.
 - (2) For turbine engine powered aeroplanes—
 - (i) The takeoff distance shall not exceed the length of the runway plus the length of any clearway, except that the length of any clearway included in the calculation shall not be greater than 1/2 the length of the runway; and
 - (ii) The accelerate-stop distance shall not exceed the length of the runway, plus the length of any stopway, at any time during takeoff until reaching V_1 .
 - (3) For reciprocating engine powered aeroplanes—
 - (i) The accelerate-stop distance shall not exceed the length of the runway at any time during takeoff until reaching V_1 .
 - (4) If the critical engine fails at any time after the aeroplane reaches V_1 , to continue the takeoff flight path and clear all obstacles either—
 - (i) By a height of at least 9.1 m (35 ft) vertically for turbine engine powered aeroplanes or 15.2 m (50 ft) for reciprocating engine powered aeroplanes; and
 - (ii) By at least 60 m (200 ft) horizontally within the aerodrome boundaries and by at least 90 meters (300 feet) horizontally after passing the boundaries, without banking more than 15 degrees at any point on the takeoff flight path.

- (b) *Helicopters.* No person may takeoff a helicopter used in commercial air transport that, in the event of a critical engine failure, cannot—
- (1) For Class 1 helicopters—
 - (i) At or before the takeoff decision point, discontinue the takeoff and stop within the rejected takeoff area; or
 - (ii) After the takeoff decision point, continue the takeoff and then climb, clearing all obstacles along the flight path, until a suitable landing site is found.
 - (2) For Class 2 helicopters—
 - (i) Before reaching a defined point after take-off, safely execute a forced landing within the rejected takeoff area, or
 - (ii) At any point after reaching a defined point after take-off, continue the takeoff and then climb, clearing all obstacles along the flight path, until a suitable landing site is found.

8.7.2.5 EN ROUTE LIMITATIONS: ALL ENGINES OPERATING

No person may take off a reciprocating engine powered aeroplane used in commercial air transport at a mass that does not allow a rate of climb of at least $6.9 V_{SO}$, (that is, the number of feet per minute obtained by multiplying the aircraft's minimum steady flight speed by 6.9) with all engines operating, at an altitude of at least 300 m (1,000 ft) above all terrain and obstructions within ten nautical miles of each side of the intended track.

8.7.2.6 EN ROUTE LIMITATIONS: ONE ENGINE INOPERATIVE

- (a) *Aeroplane.* No person may take off an aeroplane used in commercial air transport having two engines unless that aeroplane can, in the event of a power failure at the most critical point en route, continue the flight to a suitable aerodrome where a landing can be made while allowing—
- (1) For reciprocating engine powered aeroplanes—
 - (i) At least a rate of climb of $0.079 - (0.106/\text{number of engines installed}) V_{SO}^2$ (when V_{SO} is expressed in knots) at an altitude of 300 m (1,000 ft) above all terrain and obstructions within 9.3 km (5 sm), on each side of the intended track; and
 - (ii) A positive slope at an altitude of at least 450 m (1,500 ft) above the aerodrome where the aeroplane is assumed to land.
 - (2) For turbine engine powered transport category aeroplanes—
 - (i) A positive slope at an altitude of at least 300 m (1,000 ft) above all terrain and obstructions within 9.3 km (5 sm), on each side of the intended track;
 - (ii) A net flight path from cruising altitude to the intended landing aerodrome that allows at least 600 m (2,000 ft) clearance above all terrain and obstructions within 9.3 km (5 sm), on each side of the intended track; and
 - (iii) A positive slope at an altitude of at least 450 m (1,500 ft) above the aerodrome where the aeroplane is assumed to land;

Note: The climb rate specified in paragraph (a)(1)(i) may be amended to $0.026 V_{SO}^2$ for large transport category aircraft issued a type certificate prior to 1953.

Note: The 9.3 km (5 sm) clearance margin stated in paragraph (a) shall be increased to 18.5 km (10 sm) if navigational accuracy does not meet the 95% containment level.

- (b) *Helicopter.* No person shall takeoff a helicopter used in commercial air transport having two engines unless that helicopter can, in the event of the critical engine failing and any point in the en route phase, continue the flight to the destination or alternate landing site without flying below the minimum flight altitude at any point and clearing all obstacles in the approach path by a safe margin.

8.7.2.7 EN ROUTE LIMITATIONS: TWO ENGINES INOPERATIVE

- (a) *Aeroplane.* No person may takeoff an aeroplane used in commercial air transport having three or more engines at such a mass where there is no suitable landing aerodrome within 90 minutes at any point along the intended route (with all engines operating at cruising power), unless that aircraft can, in the event of simultaneous power failure of two critical engines at the most critical point along that route, continue to a suitable landing aerodrome while allowing—
- (1) For turbine engine powered aeroplanes—
 - (i) A net flight path (considering the ambient temperatures anticipated along the track) clearing vertically by at least 2,000 feet all terrain and obstructions within 9.3 km (5 nm) on each side of the intended track;
 - (ii) A positive slope at 1,500 feet above the aerodrome of intended landing; and
 - (iii) Enough fuel to continue to the aerodrome of intended landing, to arrive at an altitude of at least 1,500 feet directly over the aerodrome, and thereafter to fly for 15 minutes at cruise power.

Note: The consumption of fuel and oil after the engine failure is the same as the consumption that is allowed for in the net flight path data in the AFM.

- (2) For reciprocating engine powered aeroplanes—
 - (i) A rate of climb at $0.013 V_{so}^2$ feet per minute (that is, the number of feet per minute is obtained by multiplying the number of knots squared by 0.013) at an altitude of 1,000 feet above the highest ground or obstruction within 10 nautical miles on each side of the intended track, or at an altitude of 5,000 feet, whichever is higher; and
 - (ii) Enough fuel to continue to the aerodrome of intended landing and to arrive at an altitude of at least 300 m (1,000 ft) directly over that aerodrome.

Note: When the two engines of the reciprocating aeroplane are predicted to fail at an altitude above the prescribed minimum altitude, compliance with the prescribed rate of climb need not be shown during the descent from the cruising altitude to the prescribed minimum altitude, if those requirements can be met once the prescribed minimum altitude is reached, and assuming descent to be along a net flight path and the rate of descent to be $0.013 V_{so}^2$ greater than the rate in the approved performance data.

Note: If fuel jettisoning is authorised (or planned), the aeroplane's mass at the point where the two engines fail is considered to be not less than that which would include enough fuel to proceed to an aerodrome and to arrive at an altitude of at least 300 m (1,000 ft) directly over that aerodrome.

- (b) *Helicopters.* No person shall takeoff a Class 1 or Class 2 helicopter used in commercial air transport having three or more engines unless that helicopter can, in the event of two critical engines failing simultaneously at any point in the en route phase, continue the flight to a suitable landing site.

8.7.2.8 LANDING LIMITATIONS

- (a) *Aeroplane.* No person may take off an aeroplane used in commercial operations unless its mass on arrival at either the intended destination aerodrome or any planned alternate aerodrome would allow a full stop landing from a point 50 feet above the intersection of the obstruction clearance plane and the runway, and within—
- (1) For turbine engine powered aeroplanes, 60 percent of the effective length of each runway.
 - (2) For reciprocating engine powered aeroplanes, 70 percent of the effective length of each runway.
- (b) For the purpose of determining the allowable landing mass at the destination aerodrome, each person determining the landing limit shall ensure that—
- (1) The aeroplane is landed on the most favourable runway and in the most favourable direction, in still air; or

- (2) The aeroplane is landed on the most suitable runway considering the probable wind velocity and direction, runway conditions, the ground handling characteristics of the aeroplane, and considering other conditions such as landing aids and terrain.

Note: If the runway at the landing destination is reported or forecast to be wet or slippery, the landing distance available shall be at least 115 percent of the required landing distance unless, based on a showing of actual operating landing techniques on wet or slippery runways, a shorter landing distance (but not less than that required by paragraph (a)) has been approved for a specific type and model aeroplane and this information is included in the AFM.

- (c) A turbine powered transport category aeroplane that would be prohibited from taking off because it could not meet the requirements of paragraph (a)(1), may take off if an alternate aerodrome is specified that meets all the requirements of paragraph (a).
- (d) *Helicopters.* No person may take off a helicopter used in commercial air transport unless, with all engines operating on arrival at the intended destination landing site or any planned alternate landing, it can clear all obstacles on the approach path and can land and stop within the landing distance available.
- (e) *Helicopters.* No person may take off a helicopter used in commercial air transport unless, in the event of any engine becoming inoperative in the approach and landing phase on arrival at the intended destination landing site or any planned alternate landing, can—
- (1) For Class 1 helicopters—
 - (i) Before the landing decision point, clear all obstacles on the approach path and be able to land and stop within the landing distance available or to perform a balked landing and clear all obstacles in the flight path by an adequate margin; or
 - (ii) After the landing decision point, land and stop within the landing distance available.
 - (2) For Class 2 and Class 3 helicopters—
 - (i) Before reaching a defined point before landing, safely execute a forced landing within the landing distance available.

8.8 FLIGHT RULES

8.8.1 All Operations

8.8.1.1 OPERATION OF AIRCRAFT ON THE GROUND

- (a) No person may taxi an aircraft on the movement area of an aerodrome unless the person at the controls—
- (1) Has been authorised by the owner, the lessee, or a designated agent;
 - (2) Is fully competent to taxi the aircraft;
 - (3) Is qualified to use the radio if radio communications are required; and
 - (4) Has received instruction from a competent person in respect of aerodrome layout, and where appropriate, information on routes, signs, marking, lights, ATC signals and instructions, phraseology and procedures, and is able to conform to the operational standards required for safe aircraft movement at the aerodrome.
- (b) No person shall cause a helicopter rotor to be turned under power unless there is a qualified pilot at the controls.

8.8.1.2 SURFACE MOVEMENT OF AIRCRAFT.

- (a) In case of danger of collision between two aircraft taxiing on the movement area of an aerodrome the following shall apply :

- (1) When two aircraft are approaching head on, or approximately so, each shall stop or where practicable alter its course to the right so as to keep well clear;
- (2) When two aircraft are on a converging course, the one which has the other on its right shall give way;
- (3) An aircraft which is being overtaken by another aircraft shall have the right-of-way and the overtaking aircraft shall keep well clear of the other aircraft.

8.8.1.3 TAKEOFF CONDITIONS

- (a) Before commencing takeoff, a PIC shall ensure that—
 - (1) According to the available information, the weather at the aerodrome and the condition of the runway intended to be used will allow for a safe takeoff and departure; and
 - (2) The RVR or visibility in the takeoff direction of the aircraft is equal to or better than the applicable minimum.

8.8.1.4 FLIGHT INTO KNOWN OR EXPECTED ICING

- (a) No person may takeoff an aircraft or continue to operate an aircraft en route when the icing conditions are expected or encountered, without ensuring that the aircraft is certified for icing operations and has sufficient operational de-icing or anti-icing equipment.
- (b) No person may takeoff an aircraft when frost, ice or snow is adhering to the wings, control surfaces, propellers, engine inlets or other critical surfaces of the aircraft which might adversely affect the performance or controllability of the aircraft.
- (c) For commercial air transport operations, no person may takeoff an aircraft when conditions are such that frost, ice or snow may reasonably be expected to adhere to the aircraft, unless the procedures approved for the AOC holder by the Authority are followed to ensure ground de-icing and anti-icing is accomplished.

8.8.1.5 ALTIMETER SETTINGS

- (a) Each person operating an aircraft shall maintain the cruising altitude or flight level by reference to an altimeter set—
 - (1) Below 4,000 ft MSL to—
 - (i) The current reported altimeter setting of a station along the route and within 100 nautical miles of the aircraft;
 - (ii) The current reported altimeter setting of a nearby station, if there is not a station along the route; or
 - (iii) In the case of an aircraft not equipped with a radio, the elevation of the departure aerodrome or an appropriate altimeter setting available before departure; or
 - (2) At or above 3,000 feet MSL to 1013.2 hPa or 29.92" Hg. unless otherwise specified by the Authority.

Implementing Standard: See IS: 8.8.1.5 for a table to determine the lowest usable flight level.

8.8.1.6 MINIMUM SAFE ALTITUDES: GENERAL

- (a) Except when necessary for takeoff or landing, no person may operate an aircraft below the following altitudes:
 - (1) *Anywhere.* An altitude allowing, if a power unit fails, continuation of flight or an emergency landing without undue hazard to persons or property on the surface.

- (2) *Over congested areas.* Over any congested area of a city, town, or settlement, or over any open-air assembly of persons, less than an altitude of 400m (1,400 feet) above the highest obstacle within a horizontal radius of 600m (2,000 feet) of the aircraft.
- (3) *Over other than congested areas.* An altitude of 150m (500 feet) above the surface, except over open water or sparsely populated areas where the aircraft may not be operated closer than 150m (500 feet) to any person, vessel, vehicle, or structure.
- (4) *Helicopters.* Pilots of helicopters are not subject to the proximity restrictions provided they operate in a manner that is not hazardous to persons and property on the surface. The PIC of a helicopter shall comply with any routes or altitudes for the area that are prescribed for helicopters by the Authority.

8.8.1.7 MINIMUM SAFE VFR ALTITUDES: COMMERCIAL AIR TRANSPORT OPERATIONS

Except when necessary for takeoff or landing, or except by permission from the appropriate authority:

- (a) No person may operate an aeroplane in commercial air transport during the day, under VFR, at an altitude less than 300m (1,000 feet) above the surface or within 300m (1,000 feet) of any mountain, hill, or other obstruction to flight.
- (b) No person may operate an aeroplane in commercial air transport at night, under VFR, at an altitude less than 1,000 feet above the highest obstacle within a horizontal distance of five miles from the centre of the intended course, or, in designated mountainous areas, less than 2,000 feet above the highest obstacle within a horizontal distance of five miles from the centre of the intended course.

8.8.1.8 INSTRUMENT APPROACH OPERATING MINIMA

- (a) No person may operate to or from an aerodrome using operating minima lower than those which may be established for that aerodrome by the State in which it is located, unless that State specifically approves that operation.
- (b) No person may conduct instrument approach and landing operations other than in accordance with the provisions of Implementing Standard.
- (c) No person may conduct instrument approach and landing operations below 800 m visibility unless RVR information is provided.

Implementing Standard: See IS 8.8.1.8 for requirements for Instrument Approach Operating Minima.

8.8.1.9 THRESHOLD CROSSING HEIGHT FOR PRECISION APPROACHES

An operator shall establish operational procedures designed to ensure that an aircraft being used to conduct precision approaches crosses the threshold by a safe margin, with the aeroplane in the landing configuration and attitude.

8.8.1.10 CATEGORY II AND III OPERATIONS: GENERAL OPERATING RULES

- (a) No person may operate a civil aircraft in a Category II or III operation unless—
 - (1) The PIC and CP of the aircraft hold the appropriate authorisations and/or ratings in accordance with Licensing Requirements;
 - (2) Each flight crew member has adequate knowledge of, and familiarity with, the aircraft and the procedures to be used; and

- (3) The instrument panel in front of the pilot who is controlling the aircraft has appropriate instrumentation for the type of flight control guidance system that is being used.
- (b) Unless otherwise authorised by the Authority, no person may operate a civil aircraft in a Category II or Category III operation unless each ground component required for that operation (including RVR readings) and the related airborne equipment is installed and operating.
- (c) When the approach procedure being used provides for and requires the use of a DA, the authorised DA is the highest of the following:
 - (1) The DA prescribed by the approach procedure.
 - (2) The DA prescribed for the PIC.
 - (3) The DA for which the aircraft is equipped.
- (d) Unless otherwise authorised by the Authority, no pilot operating an aircraft in a Category II or Category III approach that provides and requires use of a DH may continue the approach below the authorised decision height unless the following conditions are met:
 - (1) The aircraft is in a position from which a descent to a landing on the intended runway can be made at a normal rate of descent using normal manoeuvres, and where that descent rate will allow touchdown to occur within the touchdown zone of the runway of intended landing.
 - (2) At least one of the following visual references for the intended runway is distinctly visible and identifiable to the pilot:
 - (i) The approach light system, except that the pilot may not descend below 100 feet above the touchdown zone elevation using the approach lights as a reference unless the red terminating bars or the red side row bars are also distinctly visible and identifiable.
 - (ii) The threshold.
 - (iii) The threshold markings.
 - (iv) The threshold lights.
 - (v) The touchdown zone or touchdown zone markings.
 - (vi) The touchdown zone lights.
- (e) Unless otherwise authorised by the Authority, each pilot operating an aircraft shall immediately execute an appropriate missed approach whenever, prior to touchdown, the requirements of paragraph (d) of this section are not met.
- (f) No person operating an aircraft using a Category III approach without DH may land that aircraft except in accordance with the provisions of the letter of authorisation issued by the Authority.
- (g) Paragraphs (a) through (f) of this section do not apply to operations conducted by AOC holders issued a certificate under Part 9. No person may operate a civil aircraft in a Category II or Category III operation conducted by an AOC holder unless the operation is conducted in accordance with that AOC holder's operations specifications.

8.8.1.11 CATEGORY II AND CATEGORY III MANUAL

- (a) Except as provided in paragraph (c) of this section, no person may operate a civil aircraft in a Category II or a Category III operation unless—
 - (1) There is available in the aircraft a current and approved Category II or Category III manual, as appropriate, for that aircraft;
 - (2) The operation is conducted in accordance with the procedures, instructions, and limitations in the appropriate manual; and
 - (3) The instruments and equipment listed in the manual that are required for a particular Category II or Category III operation have been inspected and maintained in accordance with the maintenance program contained in the manual.

- (b) Each operator must keep a current copy of each approved manual at its principal base of operations and must make each manual available for inspection upon request by the Authority.
- (c) Paragraphs (a) and (b) do not apply to operations conducted by an AOC holder issued a certificate under Part 9.

Implementing Standard: See IS: 8.8.1.11 for specific Category II / III manual requirements.

8.8.1.12 AUTHORISATION FOR DEVIATION FROM CERTAIN CATEGORY II OPERATIONS

The Authority may authorise deviations from the requirements of 8.8.1.9 and 8.8.1.11 for the operation of small aircraft in Category II operations if the Authority finds that the proposed operation can be safely conducted.

Note: Such authorisation does not permit operation of the aircraft carrying persons or property for compensation or hire.

8.8.1.13 DIVERSION DECISION

- (a) Except as provided in paragraph (b), the PIC shall land the aircraft at the nearest suitable aerodrome at which a safe landing can be made whenever an engine of an aircraft fails or is shut down to prevent possible damage.
- (b) If not more than one engine of an aeroplane having three or more engines fails, or its rotation is stopped, the PIC may proceed to an aerodrome if he or she decides that proceeding to that aerodrome is as safe as landing at the nearest suitable aerodrome after considering the—
 - (1) Nature of the malfunction and the possible mechanical difficulties that may occur if flight is continued;
 - (2) Altitude, mass, and usable fuel at the time of engine stoppage;
 - (3) Weather conditions en route and at possible landing points;
 - (4) Air traffic congestion;
 - (5) Kind of terrain; and
 - (6) Familiarity with the aerodrome to be used.
- (c) The pilot-in-command must report each engine shutdown in flight to the appropriate communication facility as soon as practicable and must keep that facility fully informed of the progress of the flight.

8.8.1.14 OPERATING NEAR OTHER AIRCRAFT

- (a) No person may operate an aircraft so close to another aircraft as to create a collision hazard.
- (b) No person may operate an aircraft in formation flight except by arrangement with the PIC of each aircraft in the formation.
- (c) No person may operate an aircraft, carrying passengers for hire, in formation flight.

8.8.1.15 RIGHT-OF-WAY RULES: EXCEPT WATER OPERATIONS

- (a) *General.*
 - (1) Each pilot shall maintain vigilance so as to see and avoid other aircraft; and
 - (2) When a rule of this subsection gives another aircraft the right-of-way, the pilot shall give way to that aircraft and may not pass over, under, or ahead of it unless well clear.
- (b) *In distress.* An aircraft in distress has the right-of-way over all other air traffic.

- (c) *Converging.*
 - (1) When aircraft of the same category are converging at approximately the same altitude (except head-on, or nearly so), the aircraft to the other's right has the right-of-way.
 - (2) If the converging aircraft are of different categories—
 - (i) A balloon has the right-of-way over any other category of aircraft;
 - (ii) A glider has the right-of-way over an airship, aeroplane, or rotorcraft; and
 - (iii) An airship has the right-of-way over an aeroplane or rotorcraft.
- (d) *Towing or refuelling.* An aircraft towing or refuelling other aircraft has the right-of-way over all other engine-driven aircraft, except aircraft in distress.
- (e) *Approaching head-on.* When aircraft are approaching each other head-on, or nearly so, each pilot of each aircraft shall alter course to the right.
- (f) *Overtaking.* Each aircraft that is being overtaken has the right-of-way and each pilot of an overtaking aircraft shall alter course to the right to pass well clear.
- (g) *Landing.* Aircraft, while on final approach to land or while landing, have the right-of-way over other aircraft in flight or operating on the surface.

Note: The PIC may not take advantage of this rule to force an aircraft off the runway surface which has already landed and is attempting to make way for an aircraft on final approach

- (h) *More than one landing aircraft.* When two or more aircraft are approaching an aerodrome for the purpose of landing, the aircraft at the lower altitude has the right-of-way.

Note: The PIC will not take advantage of this rule to cut in front of another which is on final approach to land or to overtake that aircraft.

8.8.1.16 RIGHT-OF-WAY RULES: WATER OPERATIONS

- (a) *General.* Each person operating an aircraft on the water shall, insofar as possible, keep clear of all vessels and avoid impeding their navigation, and shall give way to any vessel or other aircraft that is given the right-of-way by any rule of this subsection.
- (b) *Crossing.* When aircraft, or an aircraft and a vessel, are on crossing courses, the aircraft or vessel to the other's right has the right-of-way.
- (c) *Approaching head-on.* When aircraft, or an aircraft and a vessel, are approaching head-on, or nearly so, each shall alter its course to the right to keep well clear.
- (d) *Overtaking.* Each aircraft or vessel that is being overtaken has the right-of-way, and the one overtaking shall alter course to keep well clear.
- (e) *Special circumstances.* When aircraft, or an aircraft and a vessel, approach so as to involve risk of collision, each aircraft or vessel shall proceed with careful regard to existing circumstances, including the limitations of the respective craft.

8.8.1.17 USE OF AIRCRAFT LIGHTS

- (a) If an aircraft has red rotating beacon lights installed, the pilot shall switch those lights on prior to starting engines and display those lights at all times the engines are running.
- (b) No person may operate an aircraft between the period from sunset to sunrise unless—
 - (1) It has lighted navigation lights; and

- (2) If anticollision lights are installed, those lights are lighted.

Note: A pilot is permitted to switch off or reduce the intensity of any flashing lights if they do or are likely to adversely affect the satisfactory performance of duties or to subject an outside observer to harmful dazzle.

- (c) No person may park or move an aircraft at night in, or in a dangerous proximity to, a movement area of an aerodrome, unless the aircraft—
 - (1) Is clearly illuminated;
 - (2) Has lighted navigation lights, or
 - (3) Is in an area that is marked by obstruction lights.
- (d) No person may anchor an aircraft unless that aircraft—
 - (1) Has lighted anchor lights; or
 - (2) Is in an area where anchor lights are not required on vessels.

8.8.1.18 SIMULATED INSTRUMENT FLIGHT

- (a) No person may operate an aircraft in simulated instrument flight unless—
 - (1) That aircraft has fully functioning dual controls;
 - (2) The other control seat is occupied by a safety pilot who holds at least a private pilot licence with category and class ratings appropriate to the aircraft being flown, and
 - (3) The safety pilot has adequate vision forward and to each side of the aircraft, or a competent observer in the aircraft adequately supplements the vision of the safety pilot.
- (b) No person may engage in simulated instrument flight conditions during commercial air transport operations.

8.8.1.19 INFLIGHT SIMULATION OF ABNORMAL SITUATIONS

No person may simulate an abnormal or emergency situation during commercial air transport operations.

8.8.1.20 DROPPING, SPRAYING, TOWING

- (a) Except under conditions prescribed by the Authority, no pilot may take the following actions—
 - (1) Dropping, dusting or spraying from an aircraft;
 - (2) Towing of aircraft or other objects; or
 - (3) Allowing parachute descents.

8.8.1.21 AEROBATIC FLIGHT

- (a) Except under conditions prescribed by the Authority, no person may operate an aircraft in aerobatic flight—
 - (1) Over any city, town or settlement;
 - (2) Over an open air assembly of persons;
 - (3) Within the lateral boundaries of the surface areas of Class B, C, D or E airspace designated for an aerodrome;
 - (4) Below an altitude of 1,500 feet above the surface; or
 - (5) When the flight visibility is less than 3 statute miles.
- (b) No person may operate an aircraft in manoeuvres exceeding a bank of 60 degrees or pitch of 30 degrees from level flight attitude unless all occupants of the aircraft are wearing parachutes packed by a qualified parachute rigger in the past 12 calendar months.

8.8.1.22 FLIGHT TEST AREAS

No person may flight-test an aircraft except over open water, or sparsely populated areas having light traffic.

8.8.1.23 PROHIBITED AREAS AND RESTRICTED AREAS

No person may operate an aircraft in a prohibited area, or in a restricted area, the particulars of which have been duly published, except in accordance with the conditions of the restrictions or by permission of the State over whose territory the areas are established.

8.8.1.24 OPERATIONS IN MNPS OR RVSM AIRSPACE

- (a) No person may operate a civil aircraft of Surinamese registry in the North Atlantic airspace designated as MNPS airspace or in airspace designated as RVSM without a written authorisation issued by the Authority.
- (b) No person may operate an aircraft in MNPS or RVSM airspace, except in accordance with the conditions of the procedures and restrictions required for this airspace.

Note – See 7.1.2.7 for requirements regarding navigation equipment for operations in MNPS airspace.

8.8.1.25 OPERATIONS ON OR IN THE VICINITY OF AN UNCONTROLLED AERODROME

- (a) When approaching to land at an aerodrome without an operating control tower, each pilot of—
 - (1) An aeroplane shall make all turns of that aeroplane to the left; or to the right, if appropriately indicated by the authorities having jurisdiction over that aerodrome;
 - (2) A helicopter shall avoid the flow of aeroplanes.
- (b) When departing an aerodrome without an operating control tower, each pilot of an aircraft shall comply with any traffic patterns established by the authorities having jurisdiction over that aerodrome.
- (c) Each pilot of an aircraft shall land and takeoff into the wind unless safety, the runway configurations, or traffic considerations determine that a different direction is preferable.

Implementing Standard: See IS: 8.8.2.11 for the appropriate displays of light signals or visual markings.

8.8.1.26 AERODROME TRAFFIC PATTERN ALTITUDES: TURBOJET, TURBOFAN, OR LARGE AIRCRAFT

- (a) When arriving at an aerodrome, the PIC of a turbojet, turbofan, or large aircraft shall enter the traffic pattern at least 1,500 feet AGL until further descent is required for landing.
- (b) When departing, the PIC of a turbojet, turbofan, or large aircraft shall climb to 1,500 AGL as rapidly as practicable.

8.8.1.27 COMPLIANCE WITH VISUAL AND ELECTRONIC GLIDE SLOPES

- (a) The PIC of an aircraft approaching to land on a runway served by a visual approach slope indicator shall maintain an altitude at or above the glide slope until a lower altitude is necessary for a safe landing.

- (b) The PIC of an aircraft approaching to land on a runway served by an ILS/MLS shall fly that aircraft at or above the glide slope from the point of interception to the middle marker.

8.8.1.28 RESTRICTION OR SUSPENSION OF OPERATIONS: COMMERCIAL AIR TRANSPORT

If a PIC or an AOC holder knows of conditions, including aerodrome and runway conditions, that are a hazard to safe operations, that person shall restrict or suspend all commercial air transport operations to such aerodromes and runways as necessary until those conditions are corrected.

8.8.1.29 CONTINUATION OF FLIGHT WHEN DESTINATION AERODROME IS TEMPORARILY RESTRICTED: COMMERCIAL AIR TRANSPORT

- (a) No PIC may allow a flight to continue toward any aerodrome of intended landing where commercial air transport operations have been restricted or suspended, unless—
 - (1) In the opinion of the PIC, the conditions that are a hazard to safe operations may reasonably be expected to be corrected by the estimated time of arrival; or
 - (2) There is no safer procedure.

8.8.1.30 INTERCEPTION

When intercepted by a military or government aircraft, each PIC shall comply with the international standards when interpreting and responding to visual signals as specified in the implementing standards.

Implementing Standard: See IS: 8.8.2.11 for signals applicable to interception.

8.8.1.31 NOISE ABATEMENT PROCEDURES

- (a) Each AOC holder shall operate its aircraft in accordance with the noise abatement procedures established by the Authority.
- (b) Unless otherwise directed by the Authority, the noise abatement procedures specified by an AOC holder for any one aeroplane type shall be the same for all aerodromes.

8.8.2 Control of Air Traffic

8.8.2.1 ATC CLEARANCES

- (a) Each PIC shall obtain an ATC clearance prior to operating a controlled flight, or a portion of a flight as a controlled flight.
- (b) Each PIC shall request an ATC clearance through the submission of a flight plan to an ATC facility.
- (c) Whenever an aircraft has requested a clearance involving priority, each PIC shall submit a report explaining the necessity for such priority, if requested by the appropriate ATC facility.
- (d) No person operating an aircraft on a controlled aerodrome may taxi on the manoeuvring area or any runway without clearance from the aerodrome control tower.

8.8.2.2 ADHERENCE TO ATC CLEARANCES

- (a) When an ATC clearance has been obtained, no PIC may deviate from the clearance, except in an emergency, unless he or she obtains an amended clearance.

Note: A flight plan may cover only part of a flight, as necessary, to describe that portion of the flight or those manoeuvres which are subject to air traffic control. A clearance may cover only part of a current flight plan, as indicated in a clearance limit or by reference to specific manoeuvres such as taxiing, landing or taking off.

Note: Paragraph (a) does not prohibit a pilot from cancelling an IFR clearance when operating in VMC conditions or cancelling a controlled flight clearance when operating in airspace that does not require controlled flight.

- (b) When operating in airspace requiring controlled flight, no PIC may operate contrary to ATC instructions, except in an emergency.
- (c) Each PIC who deviates from an ATC clearance or instructions in an emergency, shall notify ATC of that deviation as soon as possible.

8.8.2.3 COMMUNICATIONS

- (a) Each person operating an aircraft on a controlled flight shall maintain a continuous listening watch on the appropriate radio frequency of, and establish two-way communication as required with, the appropriate ATC facility.
- (b) The air-ground communications shall be conducted in the English language.
- (c) The English language shall be available at all stations on the ground serving designated airports and routes used by air services.
- (d) ICAO standardized phraseology shall be used in all situations for which it has been specified. Only when standardized phraseology cannot serve an intended transmission, plain language shall be used.
- (e) The language available at a given station on the ground shall form part of the Aeronautical Information Publications.

Note: The level of language proficiency required for aeronautical radiotelephony communications is specified in CARS Part 2.

Note: More specific procedures may be prescribed by the appropriate ATC authority in respect of aircraft forming part of aerodrome traffic at a controlled aerodrome.

Note: Automatic signalling devices may be used to satisfy the requirement to maintain a continuous listening watch, if authorised by the Authority.

8.8.2.4 ROUTE TO BE FLOWN

- (a) Unless otherwise authorised or directed by the appropriate ATC facility, the PIC of a controlled flight shall, in so far as practicable—
 - (1) When on an established ATC route, operate along the defined centre line of that route; or
 - (2) When on any other route, operate directly between the navigation facilities and/or points defining that route.
- (b) The PIC of a controlled flight operating along an ATC route defined by reference to VORs shall change over for primary navigation guidance from the facility behind the aircraft to that ahead of it at, or as close as operationally feasible to, the change-over point, where established.

Note: These requirements do not prohibit manoeuvring the aircraft to pass well clear of other air traffic or the manoeuvring of the aircraft in VFR conditions to clear the intended flight path both before and during climb or descent.

8.8.2.5 INADVERTENT CHANGES

- (a) A PIC shall take the following action in the event that a controlled flight inadvertently deviates from its current flight plan:
 - (1) *Deviation from track.* If the aircraft is off track, the PIC shall adjust the heading of the aircraft to regain track as soon as practicable.

- (2) *Variation in true airspeed.* Each PIC shall inform the appropriate ATC facility if the average true airspeed at cruising level between reporting points varies from that given in the flight plan or is expected to vary by plus or minus 5 per cent of the true airspeed.
- (3) *Change in time estimate.* Each PIC shall notify the appropriate ATC facility and give a revised estimated time given as soon as possible if the time estimate for a reporting point, flight information region boundary, or destination aerodrome, whichever comes first, is found to be in excess of three minutes from that notified to ATC, or such other period of time as is prescribed by the appropriate ATC authority or on the basis of air navigation regional agreements.

8.8.2.6 ATC CLEARANCE: INTENDED CHANGES

- (a) Requests for flight plan changes shall include the following information:
 - (1) *Change of cruising level.* Aircraft identification, requested new cruising level and cruising speed at this level, and revised time estimates, when applicable, at subsequent flight information region boundaries.
 - (2) *Change of route—*
 - (i) *Destination unchanged.* Aircraft identification, flight rules; description of new route of flight including related flight plan data beginning with the position from which requested change of route is to commence; revised time estimates, and any other pertinent information.
 - (ii) *Destination change.* Aircraft identification; flight rules; description of revised route of flight to revised destination aerodrome including related flight plan data, beginning with the position from which requested change of route is to commence; revised time estimates; alternate aerodrome(s); any other pertinent information.

8.8.2.7 POSITION REPORTS

- (a) Each PIC of a controlled flight shall report to the appropriate ATC facility, as soon as possible, the time and level of passing each designated compulsory reporting point, together with any other required information, unless exempted from this requirement by the appropriate ATC authority.
- (b) Each PIC of a controlled flight shall make position reports in relation to additional points or intervals when requested by the appropriate ATC facility

8.8.2.8 OPERATIONS ON OR IN THE VICINITY OF A CONTROLLED AERODROME

- (a) No person may operate an aircraft to, from, through, or on an aerodrome having an operational control tower unless two-way communications are maintained between that aircraft and the control tower.
- (b) On arrival, each PIC shall establish communications required by paragraph (a) prior to 5 nautical miles from the aerodrome when operating from the surface up to and including 1,500 feet.
- (c) On departure, each PIC shall establish communications with the control tower prior to taxi.
- (d) *Takeoff, landing, taxi clearance.* No person may, at any aerodrome with an operating control tower, operate an aircraft on a runway or taxiway or takeoff or land an aircraft, unless an appropriate clearance has been received by ATC.

Note: A clearance to "taxi to" the takeoff runway is not a clearance to cross or taxi on that runway. It does authorise the PIC to cross other runways during the taxi to the assigned runway. A clearance to "taxi to" any other point on the aerodrome is a clearance to cross all runways that intersect the taxi route to the assigned point.

- (e) *Communications failure.* If the radio fails or two-way communication is lost, a PIC may continue a VFR flight operation and land if—

- (1) The weather conditions are at or above basic VFR minimums; and
- (2) Clearance to land is received by light signals.

Note: During IFR operations, the two-way communications failure procedures will apply.

8.8.2.9 UNLAWFUL INTERFERENCE

- (a) A PIC shall, when and if possible, notify the appropriate ATC facility when an aircraft is being subjected to unlawful interference, including—
 - (1) Any significant circumstances associated with the unlawful interference, and
 - (2) Any deviation from the current flight plan necessitated by the circumstances.

8.8.2.10 TIME CHECKS

- (a) Each PIC shall use Co-ordinated Universal Time (UTC), expressed in hours and minutes of the 24-hour day beginning at midnight, in flight operations.
- (b) Each PIC shall obtain a time check prior to operating a controlled flight and at such other times during the flight as may be necessary.

8.8.2.11 UNIVERSAL SIGNALS

- (a) Upon observing or receiving any of the designated universal aviation signals, each person operating an aircraft shall take such action as may be required by the interpretation of the signal.
- (b) Universal signals shall have only the meanings designated.
- (c) Each person using universal signals in the movement of aircraft shall only use them for the purpose indicated.
- (d) No person may use signals likely to cause confusion with universal aviation signals.

Implementing Standard: See IS: 8.8.2.11 for a list of universal aviation signals.

8.8.3 VFR Flight Rules

8.8.3.1 VISUAL METEOROLOGICAL CONDITIONS

- (a) No person may operate an aircraft under VFR when the flight visibility is less than, or at a distance from the clouds that is less than that prescribed, at the corresponding altitude and class of airspace in the following table—

Airspace and VMC Minimums			
Airspace Class	B	C D E	F G
			Above 900m (3,000 ft) MSL or above 300m (1,000 ft) AGL whichever is higher
			At and below 900m (3,000 ft) MSL or 300m (1,000 ft) above terrain, whichever is the higher
Distance from cloud	Clear of cloud	1,500 m horizontally 300m (1,000 ft) vertically	Clear of cloud and in sight of the surface
Flight visibility	8km at and above 3,050 in (10,000 ft) MSL 5 km below 3,050m (10,000 ft) MSL		5km

When the height of the transition altitude is lower than 3,050 in (10,000 ft) AMSL, FL 100 should be used in lieu of 10,000 ft.

8.8.3.2 VFR WEATHER MINIMUMS FOR TAKEOFF AND LANDING

- (a) No person may enter the traffic pattern, land or takeoff an aircraft under VFR from an aerodrome located in Class B, Class C, Class D or Class E airspace unless—
 - (1) Reported ceiling is at least 1,500 feet; and
 - (2) Reported ground visibility is at least 5 km, if reported.
- (b) If the ground visibility is not reported, the pilot shall maintain 5 km flight visibility.
- (c) Class G Airspace. No person may enter the traffic pattern, land or takeoff an aeroplane under VFR from an aerodrome located in Class G airspace below 1,200 AGL unless—
 - (1) *For aeroplanes.* The visibility is at least 1500 m and the aircraft can be operated clear of clouds within one-half mile of the runway; or
 - (2) *For helicopters.* The helicopter can be operated clear of clouds at a speed that allows the pilot adequate opportunity to see any air traffic or obstruction in time to avoid a collision.

Note: The only exception to the required weather minimums of this subsection is during a Special VFR operation.

8.8.3.3 SPECIAL VFR OPERATIONS

- (a) No person may conduct a Special VFR flight operation to enter the traffic pattern, land or takeoff an aircraft under Special VFR from an aerodrome located in Class B, C or D airspace, unless—
 - (1) Authorised by an ATC clearance;
 - (2) The aircraft remains clear of clouds; and
 - (3) The flight visibility is at least 1500 m.
- (b) No person may conduct a Special VFR flight operation in an aircraft between sunset and sunrise unless—
 - (1) The PIC is current and qualified for IFR operations; and
 - (2) The aircraft is qualified to be operated for IFR flight.

8.8.3.4 VFR CRUISING ALTITUDES

- (a) Each person operating an aircraft in level cruising flight under VFR at altitudes above 900 m (3,000 ft) from the ground or water, shall maintain:
 - (1) For magnetic courses from zero degrees to 179 degrees, any odd thousand MSL altitude or flight level plus 500 feet (such as 3,500, 5,500 or FL 215).
 - (2) For magnetic courses from 180 degrees to 359 degrees, any even thousand MSL altitude or flight level plus 500 feet (such as 4,500, 6,500 or FL 225).

Paragraph (a) does not apply when otherwise authorised by ATC, when operating in a holding pattern, or during manoeuvring in turns.

8.8.3.5 ATC CLEARANCES FOR VFR FLIGHTS

- (a) Each pilot of a VFR flight shall obtain and comply with ATC clearances and maintain a listening watch before and during operations—

- (1) Within Classes B, C and D airspace;
- (2) As part of aerodrome traffic at controlled aerodromes; and
- (3) Under Special VFR.

8.8.3.6 VFR FLIGHTS REQUIRING ATC AUTHORISATION

- (a) Unless authorised by the appropriate ATC authority, irrespective of weather conditions, no pilot may operate in VFR flight—
 - (1) Between sunset and sunrise, or such other period between sunset and sunrise as may be prescribed by the appropriate ATS authority, shall be operated in accordance with the conditions prescribed by such authority.
 - (2) Contrary to the conditions prescribed by such authority.
 - (3) Above FL 200.
 - (4) In areas where IFR rules apply.
 - (5) At transonic and supersonic speeds.

Note: ATC authorisation for VFR flights may not be granted in areas where a vertical separation minimum of only 300m (1,000 ft) is applied above FL 290.

8.8.3.7 WEATHER DETERIORATION BELOW VMC

- (a) Each pilot of a VFR flight operated as a controlled flight shall, when he or she finds it is not practical or possible to maintain flight in VMC in accordance with the ATC flight plan—
 - (1) Request an amended clearance enabling the aircraft to continue in VMC to its destination or to an alternative aerodrome, or to leave the airspace within which an ATC clearance is required;
 - (2) If no clearance can be obtained, continue to operate in VMC and notify the appropriate ATC facility of the action being taken either to leave the airspace concerned or to land at the nearest suitable aerodrome;
 - (3) Operating within a control zone, request authorisation to operate as a special VFR flight; or
 - (4) Request clearance to operate in IFR, if currently so rated and the aircraft is so approved.

8.8.3.8 CHANGING FROM VFR TO IFR

- (a) Each pilot operating in VFR who wishes to change to IFR shall—
 - (1) If a flight plan was submitted, communicate the necessary changes to be effected to its current flight plan; or
 - (2) Submit a flight plan to the appropriate ATC facility and obtain a clearance prior to proceeding IFR when in controlled airspace.

8.8.3.9 TWO-WAY RADIO COMMUNICATION FAILURE IN VFR

- (a) If radio failure occurs in VFR while under ATC control, or if VFR conditions are encountered after the failure, each pilot shall—
 - (1) Continue the flight under VFR;
 - (2) Land at the nearest suitable aerodrome; and
 - (3) Report arrival to ATC by the most expeditious means possible.

8.8.4 IFR Flight Rules

8.8.4.1 APPLICABILITY

All aircraft operated in accordance with instrument flight rules shall comply with the instrument flight procedures approved by the State in which the aerodrome is located.

8.8.4.2 IFR IN CONTROLLED AIRSPACE

- (a) No person may operate an aircraft in controlled airspace under IFR unless that person has—
 - (1) Filed an IFR flight plan; and
 - (2) Received an appropriate ATC clearance.

8.8.4.3 IFR FLIGHTS OUTSIDE CONTROLLED AIRSPACE

- (a) Each PIC of an IFR flight operating outside controlled airspace but within or into areas, or along routes, designated by the appropriate ATC authority, shall maintain a listening watch on the appropriate radio frequency and establish two-way communication, as necessary, with the ATC facility providing flight information service.
- (b) Each PIC of an IFR flight operating outside controlled airspace for which the appropriate ATC authority requires a flight plan, shall maintain a listening watch on the appropriate radio frequency and establishment of two-way communication, as necessary, with the ATC facility providing flight information service, shall report position as specified for controlled flights.

8.8.4.4 IFR TAKEOFF MINIMUMS FOR COMMERCIAL AIR TRANSPORT

- (a) Unless otherwise authorised by the Authority, no pilot operating an aircraft in commercial air transport operations may accept a clearance to take off from a civil aerodrome under IFR unless weather conditions are at or above—
 - (1) For aircraft, other than helicopters, having two engines or less—1500 m visibility.
 - (2) For aircraft having more than two engines—800 m visibility.
 - (3) For helicopters—800 m visibility.

8.8.4.5 MINIMUM ALTITUDES FOR IFR OPERATIONS

- (a) *Operation of aircraft at minimum altitudes.* Except when necessary for takeoff or landing, no person may operate an aircraft under IFR below—
 - (1) The applicable minimum altitudes prescribed by the authorities having jurisdiction over the airspace being over flown; or
 - (2) If no applicable minimum altitude is prescribed by the authorities—
 - (i) Over high terrain or in mountainous areas, at a level which is at least 600 m (2,000 ft) above the highest obstacle located within 8 km of the estimated position of the aircraft; and
 - (ii) Elsewhere than as specified in paragraph (i), at a level which is at least 300 m (1,000 ft) above the highest obstacle located within 8 km of the estimated position of the aircraft.
 - (3) If an MEA and a MOCA are prescribed for a particular route or route segment, a person may operate an aircraft below the MEA down to, but not below, the MOCA, when within 22 nautical miles of the VOR concerned.
- (b) *Climb for obstacle clearance.*

- (1) If unable to communicate with ATC, each pilot shall climb to a higher minimum IFR altitude immediately after passing the point beyond which that minimum altitude applies
- (2) If ground obstructions intervene, each pilot shall climb to a point beyond which that higher minimum altitude applies, at or above the applicable MCA.

8.8.4.6 MINIMUM ALTITUDES FOR USE OF AN AUTOPILOT

- (a) For en route operations, no person may use an autopilot at an altitude above the terrain that is less than 500 feet.

Note: If the maximum altitude loss specified in the AFM for a malfunction under cruise conditions when multiplied by two is more than 500 feet, then it becomes the controlling minimum altitude for use of the autopilot.

- (b) For instrument approach operations, no person may use an autopilot at an altitude above the terrain that is less than 50 feet below the MDA or DA.

Note: If the maximum altitude loss specified in the AFM for a malfunction under approach conditions when multiplied by two is more than 50 feet, then it becomes the controlling minimum altitude for use of the autopilot.

- (c) For Category I, II and III approaches, the Authority may approve the use of a flight control guidance system with automatic capability to landing.

8.8.4.7 IFR CRUISING ALTITUDE OR FLIGHT LEVEL IN CONTROLLED AIRSPACE

- (a) Each person operating an aircraft under IFR in level cruising flight in controlled airspace shall maintain the altitude or flight level assigned that aircraft by ATC.
- (b) If the ATC clearance assigns "VFR conditions on-top," each person shall maintain a VFR cruising altitude in VMC.

Note: The requirements for VFR cruising altitudes are in 8.8.3.4.

8.8.4.8 IFR CRUISING ALTITUDE OR FLIGHT LEVEL IN UNCONTROLLED AIRSPACE

- (a) Each person operating an aircraft in level cruising flight under IMC at altitudes above 900 m (3,000 ft) from the ground or water, shall maintain—
 - (1) For magnetic courses from zero degrees to 179 degrees, any odd thousand MSL altitude or flight level, such as 5,000, 7,000, or FL 210; and
 - (2) For magnetic courses from 180 degrees to 359 degrees, any even thousand MSL altitude or flight level, such as 4,000, 6,000 or FL 220.
- (b) A person may deviate from the cruising altitudes specified in paragraph (a) only when—
 - (1) Authorised by ATC;
 - (2) Operating in a holding pattern; or
 - (3) Manoeuvring in turns.

8.8.4.9 IFR RADIO COMMUNICATIONS

- (a) Each PIC of an aircraft operated under IFR in controlled airspace shall have a continuous watch maintained on the appropriate frequency and shall report by radio as soon as possible—

- (1) The time and altitude of passing each designated reporting point, or the reporting points specified by ATC, except that while the aircraft is under radar control, only the passing of those reporting points specifically requested by ATC need be reported;
- (2) Any unforecast weather conditions encountered; and
- (3) Any other information relating to the safety of flight, such as hazardous weather or abnormal radio station indications.

8.8.4.10 OPERATION UNDER IFR IN CONTROLLED AIRSPACE: MALFUNCTION REPORTS

- (a) The PIC of each aircraft operated in controlled airspace under IFR shall report as soon as practical to ATC any malfunctions of navigational, approach, or communication equipment occurring in flight.
- (b) In each report specified in paragraph (a), the PIC shall include the—
 - (1) Aircraft identification;
 - (2) Equipment affected;
 - (3) Degree to which the capability of the pilot to operate under IFR in the ATC system is impaired; and
 - (4) Nature and extent of assistance desired from ATC.

8.8.4.11 CONTINUATION OF IFR FLIGHT TOWARD A DESTINATION

No pilot may continue an IFR flight toward an aerodrome or heliport of intended landing, unless the latest available meteorological information indicates that the conditions at that aerodrome, or at least one destination alternate aerodrome will, at the expected time of arrival, be at or above the specified instrument approach minima.

8.8.4.12 INSTRUMENT APPROACH PROCEDURES AND IFR LANDING MINIMUMS

No person may make an instrument approach at an airport except in accordance with IFR weather minimums and instrument approach procedures set forth in the AOC holder's operations specifications.

8.8.4.13 COMMENCING AN INSTRUMENT APPROACH: COMMERCIAL AIR TRANSPORT

- (a) In commercial air transport operations, no pilot may continue an approach past the final approach fix, or where a final approach fix is not used, begin the final approach segment of an instrument approach procedure, at any aerodrome unless—
 - (1) A source approved by the Authority issues a weather report for that aerodrome; and
 - (2) The latest weather report for that aerodrome reports the visibility to be equal to or more than the visibility minimums prescribed for that procedure.
- (b) If a pilot begins the final approach segment of an instrument approach procedure and subsequently receives a weather report indicating below-minimum conditions, the pilot may continue the approach to DA or MDA.

Note: For the purpose of this subsection, the final approach segment begins at the final approach fix or facility prescribed in the instrument approach procedure. When a final approach fix is not prescribed for a procedure that includes a procedure turn, the final approach segment begins at the point where the procedure turn is completed and the aircraft is established inbound toward the aerodrome on the final approach course within the distance prescribed in the procedure.

8.8.4.14 INSTRUMENT APPROACHES TO CIVIL AERODROMES

- (a) Each person operating a civil aircraft shall use a standard instrument approach procedure prescribed by the authorities having jurisdiction over the aerodrome, unless otherwise authorised by the Authority.
- (b) Authorised DA or MDA. For the purpose of this section, when the approach procedure being used provides for and requires the use of a DA or MDA, the authorised DA or MDA is the highest of the following:
 - (1) The DA or MDA prescribed by the approach procedure.
 - (2) The DA or MDA prescribed for the PIC.
 - (3) The DA or MDA for which the aircraft is equipped.

8.8.4.15 OPERATION BELOW DA OR MDA

- (a) Where a DA or MDA is applicable, no pilot may operate a civil aircraft at any aerodrome or heliport below the authorised MDA, or continue an approach below the authorised DA unless—
 - (1) The aircraft is continuously in a position from which a descent to a landing on the intended runway can be made at a normal rate of descent using normal manoeuvres;
 - (2) For commercial air transport operations, a descent rate will allow touchdown to occur within the touchdown zone of the runway of intended landing;
 - (3) The reported flight visibility is not less than the visibility prescribed in the standard instrument approach being used or the controlling RVR is above the specified minimum; and
 - (4) At least one of the following visual references for the intended runway is distinctly visible and identifiable to the pilot—
 - (i) The approach light system, except that the pilot may not descend below 100 feet above the touchdown zone elevation using the approach lights as a reference unless the red terminating bars or the red side row bars are also distinctly visible and identifiable.
 - (ii) The threshold;
 - (iii) The threshold markings;
 - (iv) Threshold lights;
 - (v) The runway end identifier lights;
 - (vi) The visual approach slope indicator;
 - (vii) The touchdown zone or touchdown zone markings;
 - (viii) The touchdown zone lights;
 - (ix) The runway or runway markings; or
 - (x) The runway lights.

Note: 1: Controlling RVR means the reported values of one or more RVR reporting locations (touchdown, mid-point and stop-end) used to determine whether operating minima are or are not met. Where RVR is used, the controlling RVR is the touchdown RVR, unless otherwise specified by Surinamese criteria.

Note 2: These visual references do not apply to Category II and III operations. The required visual references under Category II and III operations are stated provided in the AOC holder's approved operations specifications or a special authorisation prescribed by the Authority.

8.8.4.16 LANDING DURING INSTRUMENT METEOROLOGICAL CONDITIONS

No pilot operating a civil aircraft may land that aircraft when the flight visibility is less than the visibility prescribed in the standard instrument approach procedure being used.

8.8.4.17 EXECUTION OF A MISSED APPROACH PROCEDURE

- (a) Each pilot operating a civil aircraft shall immediately execute an appropriate missed approach procedure when either of the following conditions exist:
 - (1) Whenever the required visual reference criteria is not met in the following situations:
 - (i) When the aircraft is being operated below MDA; or
 - (ii) Upon arrival at the missed approach point, including a DA where a DA is specified and its use is required, and at any time after that until touchdown.
 - (2) Whenever an identifiable part of the aerodrome is not distinctly visible to the pilot during a circling manoeuvre at or above MDA, unless the inability to see an identifiable part of the aerodrome results only from a normal bank of the aircraft during the circling approach.

8.8.4.18 CHANGE FROM IFR FLIGHT TO VFR FLIGHT

- (a) A pilot electing to change from IFR flight to VFR flight shall notify the appropriate ATC facility specifically that the IFR flight is cancelled and then communicate the changes to be made to his or her current flight plan.
- (b) When a pilot operating under IFR encounters VMC, he or she may not cancel the IFR flight unless it is anticipated, and intended, that the flight will be continued for a reasonable period of time in uninterrupted VMC.

8.8.4.19 TWO-WAY RADIO COMMUNICATIONS FAILURE IN IFR

- (a) If two-way radio communication failure occurs in IFR conditions, or if continued flight in VFR is judged not feasible, each pilot shall continue the flight according to the following:
 - (1) Route—
 - (i) By the route assigned in the last ATC clearance received;
 - (ii) If being radar vectored, by the direct route from the point of radio failure to the fix, route, or airway specified in the vector clearance;
 - (iii) In the absence of an assigned route, by the route that ATC has advised may be expected in a further clearance; or
 - (iv) In the absence of an assigned route or a route that ATC has advised may be expected in a further clearance, by the route filed in the flight plan.
 - (2) Altitude. At the highest of the following altitudes or flight levels for the route segment being flown—
 - (i) The altitude or flight level assigned in the last ATC clearance received;
 - (ii) The minimum altitude (converted, if appropriate, to minimum flight level for IFR operations); or
 - (iii) The altitude or flight level ATC advised may be expected in a further clearance.
 - (3) Leave clearance limit.
 - (i) When the clearance limit is at a fix from which an approach begins, commence descent or descent and approach—
 - (A) As close as possible to the expect-further-clearance time if one has been received, or
 - (B) If one has not been received, as close as possible to the estimated time of arrival as calculated from the filed or amended (with ATC) estimated time en route.
 - (ii) If the clearance limit is not a fix from which an approach begins—
 - (A) Leave the clearance limit at the expect-further-clearance time if one has been received, or if none has been received, upon arrival over the clearance limit,
 - (B) Proceed to a fix from which an approach begins, and
 - (C) Commence descent or descent and approach as close as possible to the ETA as calculated from the filed or amended with ATC estimated time en route.

8.9 PASSENGERS AND PASSENGER HANDLING

8.9.1 All Passenger Carrying Operations

8.9.1.1 UNACCEPTABLE CONDUCT

- (a) No person on board may interfere with a crew member in the performance of his or her duties.
- (b) Each passenger shall fasten his or her seat belt and keep it fastened while the seat belt sign is lighted.
- (c) No person on board an aircraft shall recklessly or negligently act or omit to act in such a manner as to endanger the aircraft or persons and property therein.
- (d) No person may secrete himself or herself nor secrete cargo on board an aircraft.
- (e) No person may smoke while the no-smoking sign is lighted.
- (f) No person may smoke in any aeroplane lavatory.
- (g) No person may tamper with, disable or destroy any smoke detector installed in any aeroplane lavatory.

8.9.1.2 REFUELLING WITH PASSENGERS ON BOARD

- (a) No PIC may allow an aircraft to be refuelled when passengers are embarking, on board or disembarking unless—
 - (1) The aircraft is manned by qualified personnel ready to initiate and direct an evacuation; and
 - (2) Two-way communication is maintained between the qualified personnel in the aircraft and the ground crew supervising the refuelling.
- (b) *Helicopters.* Unless specifically authorised by the Authority, no person will allow a helicopter to be refuelled when—
 - (1) Passengers are embarking, on board, or disembarking; or
 - (2) The rotors are turning.

8.9.1.3 PASSENGER SEATS, SAFETY BELTS, AND SHOULDER HARNESSSES

- (a) The PIC shall ensure that each person on onboard occupies an approved seat or berth with their own individual safety belt and shoulder harness (if installed) properly secured about them during takeoff and landing.
- (b) Each passenger shall have his or her seatbelt securely fastened at any other time the PIC determines it is necessary for safety.
- (c) A safety belt provided for the occupant of a seat may not be used during takeoff and landing by more than one person who has reached his or her second birthday.

Note: When cabin attendants are required in a commercial air transport operation, the PIC may delegate this responsibility, but shall ascertain that the proper briefing has been conducted prior to takeoff.

8.9.1.4 PASSENGER BRIEFING

- (a) The PIC shall ensure that crew members and passengers are made familiar, by means of an oral briefing or by other means, with the location and use of the following items, if appropriate—
 - (1) Seat belts;

- (2) Emergency exits;
 - (3) Life jackets;
 - (4) Oxygen dispensing equipment;
 - (5) Floor proximity emergency escape path marking;
 - (6) Other emergency equipment provided for individual use, including passenger emergency briefing cards and
 - (7) Portable electronic devices.
- (b) The PIC shall ensure that all persons on board are aware of the locations and general manner of use of the principal emergency equipment carried for collective use.

Note: For commercial air transport operations, the briefing shall contain all subjects approved by the Authority for the specific operations conducted as included in the pertinent Operations Manual.

Note: When cabin attendants are required in a commercial air transport operation, the PIC may delegate this responsibility, but shall ascertain that the proper briefing has been conducted prior to takeoff.

- (c) During takeoff and landing, and whenever by reason of turbulence or any emergency occurring during flight the precaution is considered necessary, cabin attendants shall ensure that all passengers aboard the aircraft fasten their seat belts so as to be secured in their seats.

8.9.1.5 INFLIGHT EMERGENCY INSTRUCTION

In an emergency during flight, the PIC shall ensure that all persons on board are instructed in such emergency action as may be appropriate to the circumstances.

Note: When cabin attendants are required in a commercial air transport operation, the PIC may delegate this responsibility, but shall ascertain that the proper briefing has been conducted.

8.9.1.6 PASSENGER OXYGEN: MINIMUM SUPPLY AND USE

- (a) The PIC shall ensure that breathing oxygen and masks are available to passengers in sufficient quantities for all flights at such altitudes where a lack of oxygen might harmfully effect passengers.
- (b) The PIC shall ensure that the minimum supply of oxygen prescribed by the Authority is on board the aircraft.

Note: The requirements for oxygen storage and dispensing apparatus are prescribed in Part 7.

- (c) The PIC shall require all passengers to use oxygen continuously at cabin pressure altitudes above 15,000 feet.

8.9.1.7 ALCOHOL OR DRUGS

No person may permit the boarding or serving of any person who appears to be intoxicated or who demonstrates, by manner or physical indications, that that person is under the influence of drugs (except a medical patient under proper care).

8.9.2 Commercial Air Transport Passenger Carrying Operations

8.9.2.1 PASSENGER COMPLIANCE WITH INSTRUCTIONS

Each passenger on a commercial air transport flight shall comply with instructions given by a crew member in compliance with this section.

8.9.2.2 DENIAL OF TRANSPORTATION

- (a) An AOC holder may deny transportation because a passenger—
 - (1) Refuses to comply with the instructions regarding exit seating restrictions prescribed by the Authority; or
 - (2) Has a handicap that can be physically accommodated only by an exit row seat.

8.9.2.3 CARRIAGE OF PERSONS WITHOUT COMPLIANCE WITH THESE PASSENGER-CARRYING REQUIREMENTS

- (a) The passenger-carrying requirements of paragraph (b) do not apply when carrying—
 - (1) A crew member not required for the flight;
 - (2) A representative of the Authority on official duty;
 - (3) A person necessary to the safety or security of cargo or animals; or
 - (4) Any person authorised by the AOC holder's Operation Manual procedures, as approved by the Authority.
- (b) No person may be carried without compliance to the following passenger carrying requirements unless—
 - (1) There is an approved seat with an approved seat belt for that person;
 - (2) That seat is located so that the occupant is not in any position to interfere with the flight crew members performing their duties;
 - (3) There is unobstructed access from their seat to the flight deck or a regular or emergency exit;
 - (4) There is a means for notifying that person when smoking is prohibited and when seat belts shall be fastened; and
 - (5) That person has been orally briefed by a crew member on the use of emergency equipment and exits.

8.9.2.4 CABIN ATTENDANTS AT DUTY STATIONS

- (a) During taxi, cabin attendants shall remain at their duty stations with safety belts and shoulder harness fastened except to perform duties related to the safety of the aircraft and its occupants.
- (b) During takeoff and landing, cabin attendants shall be located as near as practicable to required floor level exits and shall be uniformly distributed throughout the aircraft to provide the most effective egress of passengers in event of an emergency evacuation.
- (c) When passengers are on board a parked aircraft, cabin attendants (or another person qualified in emergency evacuation procedures for the aircraft) will be placed in the following manner:
 - (1) If only one qualified person is required, that person shall be located in accordance with the AOC holder's Operations Manual procedures.
 - (2) If more than one qualified person is required, those persons shall be spaced throughout the cabin to provide the most effective assistance for the evacuation in case of an emergency.

8.9.2.5 EVACUATION CAPABILITY

The PIC, SCA and other person assigned by the AOC holder shall ensure that, when passengers are on board the aircraft prior to movement on the surface, at least one floor-level exit provides for egress of passengers through normal or emergency means.

8.9.2.6 ARMING OF AUTOMATIC EMERGENCY EXITS

No person may cause an aircraft carrying passengers to be moved on the surface, takeoff or land unless each automatically deployable emergency evacuation assisting means installed on the aircraft is ready for evacuation.

8.9.2.7 ACCESSIBILITY OF EMERGENCY EXITS AND EQUIPMENT

No person may allow carry-on baggage or other items to block access to the emergency exits when the aircraft is moving on the surface, during takeoff or landing, or while passengers remain on board.

8.9.2.8 STOPS WHERE PASSENGERS REMAIN ON BOARD

- (a) At stops where passengers remain on board the aircraft, the PIC, the SCA, or both shall ensure that—
 - (1) All engines are shut down unless approved by the authority;
 - (2) At least one floor level exit remains open to provide for the deplaning of passengers; and
 - (3) There is at least one person immediately available who is qualified in the emergency evacuation of the aircraft and who has been identified to the passengers on board as responsible for the passenger safety.
- (b) If refuelling with passengers on board, the PIC or a designated company representative shall ensure that the AOC holder's Operations Manual procedures are followed.

8.9.2.9 CARRIAGE OF PERSONS WITH REDUCED MOBILITY

- (a) No person may allow a person of reduced mobility to occupy seats where their presence could—
 - (1) Impede the crew in their duties;
 - (2) Obstruct access to emergency equipment; or
 - (3) Impede the emergency evacuation of the aircraft.

8.9.2.10 EXIT ROW SEATING

No PIC or SCA may allow a passenger to sit in an emergency exit row if the PIC or SCA determine that it is likely that the passenger would be unable to understand and perform the functions necessary to open an exit and to exit rapidly.

Implement Standard: See IS: 8.9.2.10 for additional requirements pertaining to exit row seating.

8.9.2.11 PROHIBITION AGAINST CARRIAGE OF WEAPONS

No person may, while on board an aircraft being operated in commercial air transport, carry on or about their person a deadly or dangerous weapon, either concealed or unconcealed.

Note: This section does not apply to officials or employees of the State who are authorised to carry weapons or crew members and other persons authorised by the AOC holder to carry arms.

8.9.2.12 OXYGEN FOR MEDICAL USE BY PASSENGERS

- (a) An AOC holder may allow a passenger to carry and operate equipment for the storage, generation or dispensing of medical oxygen only as prescribed by the Authority.
- (b) No person may smoke, and no crewmember may allow any person to smoke within 10 feet of oxygen storage and dispensing equipment carried for the medical use of a passenger.
- (c) No crewmember may allow any person to connect or disconnect oxygen dispensing equipment to or from an oxygen cylinder while any other passenger is aboard the aircraft.

8.9.2.13 CARRY-ON BAGGAGE

- (a) No person may allow the boarding of carry-on baggage unless it can be adequately and securely stowed in accordance with the AOC holder's Operations Manual procedures.
- (b) No person may allow aircraft passenger entry doors to be closed in preparation for taxi or pushback unless at least one required crewmember has verified that each article of baggage has been properly stowed in overhead racks with approved restraining devices or doors, or in approved locations aft of the bulkhead.
- (c) No person may allow carry-on baggage to be stowed in a location that would cause that location to be loaded beyond its maximum placard mass limitation.

Note: The stowage locations shall be capable of restraining the articles in crash impacts severe enough to induce the ultimate inertia forces specified in the emergency landing conditions under which the aircraft was type-certified.

8.9.2.14 CARRIAGE OF CARGO IN PASSENGER COMPARTMENTS

No person may allow the carriage of cargo in the passenger compartment of an aircraft except as prescribed by the Authority.

Implementing Standard: See IS: 8.9.2.14 for specific requirements pertaining to carriage of cargo in passenger compartments.

8.9.2.15 PASSENGER INFORMATION SIGNS

The PIC shall turn on required passenger information signs during any movement on the surface, for each takeoff and each landing, and when otherwise considered to be necessary.

8.9.2.16 REQUIRED PASSENGER BRIEFINGS

- (a) No person may commence a takeoff unless the passengers are briefed prior to takeoff in accordance with the AOC holder's Operation Manual procedures on—
 - (1) Smoking limitations and prohibitions;
 - (2) Emergency exit location and use;
 - (3) Use of safety belts;
 - (4) Emergency floatation means location and use;
 - (5) Fire extinguisher location and operation;
 - (6) Placement of seat backs;
 - (7) If flight is above 12,000 feet MSL, the normal and emergency use of oxygen; and
 - (8) The passenger briefing card.
- (b) Immediately before or immediately after turning the seat belt sign off, the PIC or SCA shall ensure that the passengers are briefed to keep their seat belts fastened while seated, even when the seat belt sign is off.
- (c) Before each takeoff, the PIC or SCA shall ensure that any persons of reduced mobility are personally briefed on—
 - (1) The route to the most appropriate exit; and
 - (2) The time to begin moving to the exit in event of an emergency.

8.9.2.17 PASSENGER BRIEFING: EXTENDED OVERWATER OPERATIONS

No person may commence extended overwater operations unless all passengers have been orally briefed on the location and operations of life preservers, liferafts and other flotation means, including a demonstration of the method of donning and inflating a life preserver.

8.9.2.18 PASSENGER SEAT BELTS

- (a) Each passenger occupying a seat or berth shall fasten his or her safety belt and keep it fastened while the "Fasten Seat Belt" sign is lighted or, in aircraft not equipped with such a sign, whenever instructed by the PIC.
- (b) No passenger safety belt may be used by more than one occupant during takeoff and landing.
- (c) At each unoccupied seat, the safety belt and shoulder harness, if installed, shall be secured so as not to interfere with crew members in the performance of their duties or with the rapid egress of occupants in an emergency.

Note: A person who has not reached his or her second birthday may be held by an adult who is occupying a seat or berth.

Note: A berth, such as a multiple lounge or divan seat, may be occupied by two persons provided it is equipped with an approved safety belt for each person and is used during en route flight only.

8.9.2.19 PASSENGER SEAT BACKS

No PIC or SCA may allow the takeoff or landing of an aircraft unless each passenger seat back is in the upright position.

Note: Exceptions may only be made in accordance with procedures in the AOC holder's Operations Manual provided the seat back does not obstruct any passenger's access to the aisle or to any emergency exit.

8.9.2.20 STOWAGE OF FOOD, BEVERAGE AND PASSENGER SERVICE

- (a) No PIC or SCA may allow the movement of an aircraft on the surface, takeoff or land—
 - (1) When any food, beverage or tableware furnished by the AOC holder is located at any passenger seat; and
 - (2) Unless each food and beverage tray and seat back tray table is in the stowed position.

8.9.2.21 SECURING OF ITEMS OF MASS IN PASSENGER COMPARTMENT

- (a) No person may allow the takeoff or landing of an aircraft unless each item of mass in the passenger cabin is properly secured to prevent it from becoming a hazard during taxi, takeoff and landing and during turbulent weather conditions.
- (b) No person may allow an aircraft to move on the surface, takeoff or land unless each passenger serving cart is secured in its stowed position.

8.10 CREW MEMBER AND FLIGHT OPERATIONS OFFICER QUALIFICATIONS: COMMERCIAL AIR TRANSPORT

8.10.1.1 AGE 60 – 65 RESTRICTION

- (a) No person may serve nor may any AOC holder use a person as a required pilot flight crew member on an aircraft engaged in single pilot commercial air transport operations if that person has reached his or her 60th birthday; for commercial air transport operations requiring more than one pilot, one pilot may be up to 65 years of age provided the other pilot is less than 60 years of age,
- (b) Check airmen who have reached their 65th birthday or who do not hold an appropriate medical certificate may continue their check airman functions, but may not serve as or occupy the position of a required pilot flight crew member on an aircraft engaged in international commercial air transport operations.

8.10.1.2 PIC LICENCE REQUIREMENTS: TURBOJET, TURBOFAN, OR LARGE AIRCRAFT

No pilot may act as PIC of a turbojet, turbofan, or large aircraft in commercial air transportation operations unless he or she holds an ATP licence, an instrument rating and a type rating for that aircraft.

8.10.1.3 PIC LICENCE REQUIREMENTS: NON TURBOJET OR TURBOFAN SMALL AIRCRAFT

- (a) No pilot may act as PIC of a non-turbojet or turbofan small aircraft in commercial air transport during—
 - (1) IFR operations unless he or she holds a commercial pilot licence with appropriate category and class ratings for the aircraft operated, and an instrument rating and meets the experience requirements for the operation, or
 - (2) Day VFR operations unless he or she holds a commercial pilot licence with appropriate category and class ratings for the aircraft operated.

8.10.1.4 PIC AERONAUTICAL EXPERIENCE: SMALL AIRCRAFT

- (a) No pilot may act as PIC of a small aircraft in commercial air transport during—
 - (1) IFR operations unless he or she meets the minimum aeronautical experience requirements necessary to qualify for the ATP licence and the instrument rating, or
 - (2) VFR operations unless he or she has logged a minimum of 500 hours of time as a pilot, including at least 100 hours of cross-country flight time including 25 hours of which were at night.

8.10.1.5 CO-PILOT LICENCE REQUIREMENTS

- (a) No pilot may act as CP of an aircraft in commercial air transport operations unless he or she—
 - (1) Holds a commercial pilot licence with appropriate category and class ratings or type rating for the aircraft operated; and
 - (2) Holds an instrument rating.

8.10.1.6 FE LICENCE REQUIREMENTS

No person may act as the flight engineer of an aircraft unless he or she holds a flight engineer licence with the appropriate type rating.

8.10.1.7 ONE PILOT QUALIFIED TO PERFORM FE FUNCTIONS

The AOC holder shall ensure that, on all flights requiring a flight engineer, there is assigned at least one other flight crew member qualified to perform the FE duties in the event the FE becomes incapacitated unless otherwise approved by the Authority.

8.10.1.8 PERSONS QUALIFIED TO FLIGHT RELEASE

- (a) No person may act as a flight operations officer in releasing a scheduled passenger-carrying commercial air transport operation unless that person—
- (1) Holds a flight operations officer licence; and
 - (2) Is currently qualified with the AOC holder for the operation and type of aircraft used.

8.10.1.9 COMPANY PROCEDURES INDOCTRINATION

No person may serve nor may any AOC holder use a person as a crew member or flight operations officer/flight dispatcher unless that person has completed the company procedures indoctrination curriculum approved by the Authority, which shall include a complete review of operations manual procedures pertinent to the crew member or flight operation officer's duties.

Implementing Standard: See IS: 8.10.1.9 for knowledge area and programme hour requirements.

8.10.1.10 INITIAL DANGEROUS GOODS TRAINING

No person may serve nor may any AOC holder use a person as a crew member unless he or she has completed the appropriate initial dangerous goods curriculum approved by the Authority.

Implementing Standard: See IS: 8.10.1.10 for specific course curriculum requirements.

8.10.1.11 INITIAL SECURITY TRAINING

No person may serve nor may any AOC holder use a person as a crew member unless he or she has completed the initial security curriculum approved by the Authority.

8.10.1.12 INITIAL CREW RESOURCE MANAGEMENT

No person may serve nor may any AOC holder use a person as a flight operations officer or crew member unless that person has completed the initial CRM curriculum approved by the Authority.

Implementing Standard: IS: 8.10.1.12 for course curriculum topics.

8.10.1.13 INITIAL EMERGENCY EQUIPMENT DRILLS

No person may serve nor may any AOC holder use a person as a crew member unless that person has completed the appropriate initial emergency equipment curriculum and drills for the crew member position approved by the Authority for the emergency equipment available on the aircraft to be operated.

Implementing Standard: See IS: 8.10.1.13 for course curriculum requirements.

8.10.1.14 INITIAL AIRCRAFT GROUND TRAINING

- (a) No person may serve nor may any AOC holder use a person as a crew member or flight operations officer unless he or she has completed the initial ground training approved by the Authority for the aircraft type.
- (b) Initial aircraft ground training for flight crew members shall include the pertinent portions of the operations manuals relating to aircraft-specific performance, mass and balance, operational policies, systems, limitations, normal, abnormal and emergency procedures on the aircraft type to be used.

Implementation Standard: See IS: 8.10.1.14(b) for specific course curriculum requirements for flight crew members.

Note: The AOC holder may have separate initial aircraft ground training curricula of varying lengths and subject emphasis which recognise the experience levels of flight crew members approved by the Authority.

- (c) For cabin attendants, initial aircraft ground training shall include the pertinent portions of the operations manuals relating to aircraft-specific configuration, equipment, normal and emergency procedures for the aircraft types within the fleet.

Implementation Standard: See IS: 8.10.1.14(c) for specific course curriculum requirements for cabin attendants.

- (d) For flight operations officers, aircraft initial ground training shall include the pertinent portions of the operations manuals relating to aircraft-specific flight preparation procedures, performance, mass and balance, systems, limitations for the aircraft types within the fleet.

Implementation Standard: See IS: 8.10.1.14(d) for specific course curriculum requirements for flight operations officers.

8.10.1.15 INITIAL AIRCRAFT FLIGHT TRAINING

- (a) No person may serve nor may any AOC holder use a person as a flight crew member unless he or she has completed the initial flight training approved by the Authority for the aircraft type.
- (b) Initial flight training shall focus on the manoeuvring and safe operation of the aircraft in accordance with AOC holder's normal, abnormal and emergency procedures.
- (c) An AOC holder may have separate initial flight training curriculum which recognise the experience levels of flight crew members approved by the Authority.

Implementing Standard: See IS: 8.10.1.15 for specific flight curriculum.

8.10.1.16 INITIAL SPECIALISED OPERATIONS TRAINING

- (a) No person may serve nor may any AOC holder use a person as a flight crew member or flight operations officer unless he or she has completed the appropriate initial specialised operations training curriculum approved by the Authority.
- (b) Specialised operations for which initial training curricula shall be developed include—
 - (1) Low minimums operations, including low visibility takeoffs and Category II and III operations;
 - (2) Extended range operations (ETOPS);
 - (3) Specialised avoidance systems (e.g. TCAS, (E)GPWS)
 - (4) Specialised (vertical) navigation (e.g. RVSM / MNPS); and
 - (5) PIC right seat qualification.

Implementing Standard: See IS: 8.10.1.16 for specific initial specialised operations training curriculum.

8.10.1.17 AIRCRAFT DIFFERENCES

No person may serve nor may any AOC holder use a person as a flight operations officer or crew member on an aircraft of a type for which a differences curriculum is included in the AOC holder's approved training program, unless that person has satisfactorily completed that curriculum, with respect to both the crew member position and the particular variant of that aircraft.

Implementing Standard: See IS: 8.10.1.17 for aircraft differences training pertaining to flight operations officers.

8.10.1.18 USE OF SIMULATORS

- (a) Each aircraft simulator and other training device that is used for flight crew member qualification shall—
 - (1) Be specifically approved by the Authority for—
 - (i) The AOC holder;
 - (ii) The type of aircraft, including type variations, for which the training or check is being conducted;
 - (iii) The particular manoeuvre, procedure, or crew member function involved;
 - (2) Maintain the performance, functional, and other characteristics that are required for approval;
 - (3) Be modified to conform with any modification to the aircraft being simulated that results in changes to performance, functional, or other characteristics required for approval;
 - (4) Be given a daily functional pre-flight check before use; and
 - (5) Have a daily discrepancy log kept by the appropriate instructor or check airman at the end of each training or check flight.

8.10.1.19 INTRODUCTION OF NEW EQUIPMENT OR PROCEDURES

No person may serve nor may any AOC holder use a person as a flight crew member when that service would require expertise in the use of new equipment or procedures for which a curriculum is included in the AOC holder's approved training program, unless that person has satisfactorily completed that curriculum, with respect to both the crew member position and the particular variant of that aircraft.

8.10.1.20 AIRCRAFT AND INSTRUMENT PROFICIENCY CHECKS

- (a) No person may serve nor may any AOC holder use a person as a pilot flight crew member unless, since the beginning of the 6th calendar month before that service, that person has passed the proficiency check prescribed by the Authority in the make, and model aircraft on which their services are required.
- (b) No person may serve nor may any AOC holder use a person as a pilot in IFR operations unless, since the beginning of the 6th calendar month before that service, that pilot has passed the instrument competency check prescribed by the Authority.
- (c) A pilot may complete the requirements of paragraphs (a) and (b) simultaneously in a specific aircraft type.

Implementing Standard: See IS: 8.10.1.20 for specific operation and procedures pertaining to the proficiency checks.

8.10.1.21 RE-ESTABLISHING REGENCY OF EXPERIENCE: PILOT

- (a) In addition to meeting all applicable training and checking requirements, a required pilot flight crew member who, in the preceding 90 days has not made at least three takeoffs and landings in the aircraft type in which that person is to serve, shall, under the supervision of a check airman, re-establish recency of experience as follows:
 - (1) Make at least three takeoffs and landings in the aircraft type in which that person is to serve or in a qualified simulator.
 - (2) Make at least one takeoff with a simulated failure of the most critical powerplant, one landing from the lowest ILS minimum authorised for the AOC holder, and one landing to a full stop.
- (b) When using a simulator to accomplish any of the takeoff and landing training requirements necessary to re-establish recency of experience, each required flight crew member position shall be occupied by an appropriately qualified person and the simulator shall be operated as if in a normal in-flight environment without use of the repositioning features of the simulator.
- (c) A check airman who observes the takeoffs and landings of a pilot flight crew member shall certify that the person being observed is proficient and qualified to perform flight duty in operations and may require any additional manoeuvres that are determined necessary to make this certifying statement.

8.10.1.22 PAIRING OF LOW EXPERIENCE CREW MEMBERS

- (a) If a CP has fewer than 100 hours of flight time in the aircraft type being flown in commercial air transport, and the PIC is not an appropriately qualified check pilot, the PIC shall make all takeoffs and landings in situations designated as critical by the Authority.
- (b) No PIC or CP may conduct operations for an aircraft type aeroplane in commercial air transport unless either pilot has at least 75 hours of line operating flight time, either as PIC or CP.
- (c) The Authority may, upon application by the AOC holder, authorise deviations from paragraph (b) by an appropriate amendment to the operations specifications in any of the circumstances identified in IS: 8.10.1.22.

Implementing Standard: See IS: 8.10.1.22 for those situations designated as critical by the Authority and for circumstances authorising a deviation from paragraph (b).

8.10.1.23 FLIGHT ENGINEER PROFICIENCY CHECKS

- (a) No person may serve nor may any AOC holder use a person as a flight engineer on an aircraft unless within the preceding 6 calendar months he or she has—
 - (1) Had a proficiency check in accordance with the requirements prescribed by the Authority; or
 - (2) 50 hours flight time with an AOC holder as flight engineer in the aircraft type.

Implementing Standard: See IS: 8.10.1.23 for specific procedures used in FE proficiency checks.

8.10.1.24 COMPETENCE CHECKS: CABIN ATTENDANTS

No person may serve nor may any AOC holder use a person as a cabin attendant unless, since the beginning of the 12th calendar month before that service, that person has passed the competency check prescribed by the Authority performing the emergency duties appropriate to that person's assignment.

Implementing Standard: See IS: 8.10.1.24 for specific procedures used in cabin attendant competence checks.

8.10.1.25 COMPETENCE CHECKS: FLIGHT OPERATIONS OFFICERS

No person may serve nor may any AOC holder use a person as a flight operations officer unless, since the beginning of the 12th calendar month before that service, that person has passed the competency check, prescribed by the Authority, performing the flight preparation and subsequent duties appropriate to that person's assignment.

Implementing Standard: See IS: 8.10.1.25 for specific procedures used in flight operation officer competence checks.

8.10.1.26 SUPERVISED LINE FLYING: PILOTS

- (a) Each pilot initially qualifying as PIC shall complete a minimum of 10 flights performing the duties of a PIC under the supervision of a check airman.
- (b) Each PIC transitioning to a new aircraft type shall complete a minimum of 5 flights performing the duties of a PIC under the supervision of a check airman.
- (c) Each pilot qualifying for duties other than PIC shall complete a minimum of 5 flights sectors performing those duties under the supervision of a check airman.
- (d) During the time that a qualifying PIC is acquiring operating experience, a check pilot who is also serving as the PIC shall occupy a pilot station.
- (e) In the case of a transitioning PIC, the check pilot serving as PIC may occupy the observer's seat if the transitioning pilot has made at least two takeoffs and landings in the aircraft type used, and has satisfactorily demonstrated to the check pilot that he is qualified to perform the duties of a PIC for that aircraft type.

8.10.1.27 SUPERVISED LINE FLYING: FLIGHT ENGINEERS

Each person qualifying as a flight engineer for an aircraft type shall perform those functions for a minimum of 5 flights under the supervision of a check airman or a qualified flight engineer.

8.10.1.28 SUPERVISED LINE EXPERIENCE: CABIN ATTENDANTS

Each person qualifying as a cabin attendant shall perform those functions for a minimum of 2 flights under the supervision of a senior cabin attendant.

Note: While qualifying, this person may not be a required crew member.

8.10.1.29 LINE OBSERVATIONS: FLIGHT OPERATIONS OFFICERS

No person may serve nor may any AOC holder use a person as a flight operations officer unless, since the beginning of the 12th calendar month before that service, that person has observed, on the flight deck, the conduct of 2 complete flights over routes representative of those for which that person is assigned duties.

8.10.1.30 ROUTE AND AREA CHECKS: PILOT QUALIFICATION

- (a) No person may serve nor may any AOC holder use a person as a pilot unless, within the preceding 12 calendar months, that person has passed a route check in which he or she satisfactorily performed their assigned duties in one of the aircraft types they are to fly.
- (b) No person may perform PIC duties over a designated special operational area that requires a special navigation system or procedures or in ETOPS operations unless their competency with the system and procedures has been demonstrated to the AOC holder within the past 12 calendar months.
- (c) Each PIC shall demonstrate special operational competency by navigation over the route or area as PIC under the supervision of a check airman and, on a continuing basis, by flights performing PIC duties.

8.10.1.31 PIC LOW MINIMUMS AUTHORISATION

- (a) Until a PIC has 15 flights performing PIC duties in the aircraft type (which included 5 approaches to landing using Category I or II procedures), he or she may not plan for or initiate an instrument approach when the ceiling is less than 300 feet and the visibility less than 1 mile.
- (b) Until a PIC has 20 flights performing PIC duties in the aircraft type (which included 5 approach and landing using Category III procedures), he or she may not plan for or initiate an approach when the ceiling is less than 100 feet or the visibility is less than 1200 RVR.

8.10.1.32 DESIGNATED SPECIAL AERODROMES AND HELIPORTS: PIC QUALIFICATION

- (a) No person may serve nor may any AOC holder use a person as PIC for operations at designated special aerodromes and heliports unless within the preceding 12 calendar months—
 - (1) The PIC has been qualified by the AOC holder through a pictorial means for that aerodrome acceptable to the Authority for that aerodrome; or
 - (2) The PIC or the assigned CP has made a takeoff and landing at that aerodrome while serving as a flight crew member for the AOC holder.
- (b) Designated special aerodrome and heliport limitations are not applicable if the operation will occur—
 - (1) During daylight hours;
 - (2) When the visibility is at least 3 miles; and
 - (3) When the ceiling at that aerodrome is at least 1000 feet above the lowest initial approach altitude prescribed for an instrument approach procedure.

8.10.1.33 RECURRENT TRAINING: FLIGHT CREW MEMBERS

- (a) No person may serve nor may any AOC holder use a person as a flight crew member unless within the preceding 12 calendar months that person has completed the recurrent ground and flight training curricula approved by the Authority.
- (b) The recurrent ground training shall include training on—
 - (1) Aircraft systems and limitations, specialized operations training and normal, abnormal and emergency procedures;
 - (2) Emergency equipment and drills;
 - (3) Crew resource management;
 - (4) Dangerous goods; and
 - (5) Security training.

- (c) The recurrent flight training curriculum shall include—
- (1) Manoeuvring and safe operation of the aircraft in accordance with AOC holder's normal, abnormal and emergency procedures;
 - (2) Manoeuvres and procedures necessary for avoidance of in-flight hazards; and
 - (3) For authorised pilots, at least one low visibility takeoff to the lowest applicable minimum LVTO and two approaches to the lowest approved minimums for the AOC holder, one of which is to be a missed approach.

Implementing Standard: See IS: 8.10.1.33 for detailed recurrent training requirements.

Note: Satisfactory completion of a proficiency check with the AOC holder for the type aircraft and operation to be conducted may be used in lieu of recurrent flight training.

8.10.1.34 RECURRENT TRAINING: CABIN ATTENDANTS

- (a) No person may serve nor may any AOC holder use a person as a cabin attendant unless within the preceding 12 calendar months that person has completed the recurrent ground curricula approved by the Authority.
- (b) The recurrent ground training shall include training on—
 - (1) Aircraft-specific configuration, equipment and procedures;
 - (2) Emergency and first aid equipment and drills;
 - (3) Crew resource management;
 - (4) Dangerous goods; and
 - (5) Security training.

Implementing Standard: See IS: 8.10.1.34 for specific emergency program training requirements for cabin attendants.

8.10.1.35 RECURRENT TRAINING: FLIGHT OPERATIONS OFFICERS

- (a) No person may serve nor may any AOC holder use a person as a flight operations officer unless within the preceding 12 calendar months that person has completed the recurrent ground curricula approved by the Authority.
- (b) The recurrent ground training shall include training on—
 - (1) Aircraft-specific flight preparation;
 - (2) Crew resource management; and
 - (3) Dangerous goods.

Implementing Standard: See IS: 8.10.1.35 for specific program training requirements for flight operations officers.

8.10.1.36 CHECK AIRMAN TRAINING

No person may serve nor may any AOC holder use a person as a check airman unless he or she has completed the curricula approved by the Authority for those functions for which they are to serve.

Implementing Standard: See IS: 8.10.1.36 for specific training program requirements for check airmen.

8.10.1.37 FLIGHT INSTRUCTOR TRAINING

No person may serve nor may any AOC holder use a person as an instructor unless he or she has completed the curricula approved by the Authority for those functions for which they are to serve and is in the possession of an appropriate instructor rating.

Implementing Standard: See IS: 8.10.1.37 for specific training program requirements for instructor.

8.10.1.38 FLIGHT INSTRUCTOR QUALIFICATIONS

No AOC holder may use a person nor may any person serve as a flight instructor in an established training program unless, with respect to the aircraft type involved, that person—

- (1) Holds the airman licences and rating required to serve as a PIC, a flight engineer, a flight navigator or an instructor, as applicable;
- (2) Has satisfactorily completed the appropriate training phases for the aircraft, including recurrent training, that are required to serve as a PIC, flight engineer, flight navigator, or an instructor, as applicable;
- (3) Has satisfactorily completed the appropriate proficiency, competency and recency of experience checks that are required to serve as a PIC, flight engineer, flight navigator, or an instructor, as applicable;
- (4) Has satisfactorily completed the applicable initial or transitional training requirements and the Authority-observed in-flight competency check; and
- (5) Holds at least a Class III medical certificate unless serving as a required crew member, in which case holds a Class I medical certificate as appropriate.

8.10.1.39 CHECK AIRMAN QUALIFICATIONS

No AOC holder may use a person, nor may any person serve as a check airman in an established training program unless, with respect to the aircraft type involved, that person—

- (1) Holds the airman licences and ratings required to serve as a PIC, a flight engineer, or a flight navigator, as applicable;
- (2) Has satisfactorily completed the appropriate training phases for the aircraft, including recurrent training, that are required to serve as a PIC, flight engineer, or flight navigator, as applicable;
- (3) Has satisfactorily completed the appropriate proficiency, competency and recency of experience checks that are required to serve as a PIC, flight engineer, or flight navigator, as applicable;
- (4) Has satisfactorily completed the applicable initial or transitional training requirements and the Authority-observed in-flight competency check;
- (5) Holds at least a Class III medical certificate unless serving as a required crew member, in which case holds a Class I medical certificate as appropriate; and
- (6) Has been approved by the Authority for the check airman duties involved.

8.10.1.40 CHECK AIRMAN DESIGNATION

No person may serve nor may any AOC holder use a person as a check airman for any flight check unless that person has been designated by name and approved function by the Authority within the preceding 12 calendar months.

8.10.1.41 CHECK AIRMAN LIMITATIONS

- (a) No person may serve nor may any AOC holder use a person as a check airman for any check—

- (1) In an aircraft as a required pilot flight crew member unless that person holds the required airman licences and ratings and has completed for the AOC holder all applicable training, qualification and currency requirements of this Part applicable to the crew position and the flight operations being checked;
- (2) In an aircraft as an observer check airman unless that person holds the airman licences and ratings and has completed all applicable training, qualification and line observation requirements of this Part applicable to the position and the flight operations being checked; or
- (3) In a simulator unless that person has completed or observed with the AOC holder all training, qualification and line observation requirements of this Part applicable to the position and flight operations being checked.

8.10.1.42 SUBSTITUTION OF SIMULATOR EXPERIENCE

- (a) No AOC holder may use a simulator for training or checking unless that simulator has been specifically approved for the AOC holder in writing by the Authority.
- (b) No AOC holder may use a simulator for any purpose other than that specified in the Authority's approval.

8.10.1.43 LINE QUALIFICATION: CHECK AIRMAN AND INSTRUCTOR

- (a) No person may serve nor may any AOC holder use a person as a check airman or simulator instructor unless, since the beginning of the 12th calendar month before that service, that person has—
 - (1) Flown at least 5 flights as a required crew member for the type of aircraft involved; or
 - (2) Observed, on the flight deck, the conduct of 2 complete flights in the aircraft type to which the person is assigned.

8.10.1.44 TERMINATION OF A PROFICIENCY, COMPETENCE OR LINE CHECK

If it is necessary to terminate a check for any reason, the AOC holder may not use the crew member or flight operations officer in commercial air transport operations until the completion of a satisfactory recheck.

8.10.1.45 RECORDING OF CREW MEMBER QUALIFICATIONS

- (a) The AOC holder shall record in its records maintained for each crew member and flight operations officer, the completion of each of the qualifications required by this Part.
- (b) A pilot may complete the curricula required by this Part concurrently or intermixed with other required curricula, but completion of each of these curricula shall be recorded separately.

8.10.1.46 MONITORING OF TRAINING AND CHECKING ACTIVITIES

- (a) To enable adequate supervision of its training and checking activities, the AOC holder shall forward to the Authority at least 1 (one) month prior to the scheduled activity the dates, report times and report location of all—
 - (1) Training for which a curriculum is approved in the AOC holder's training program; and
 - (2) Proficiency, competence and line checks.
- (b) Failure to provide the information required by paragraph (a) may invalidate the training or check and the Authority may require that it be repeated for observation purposes.

8.10.1.47 ELIGIBILITY PERIOD

- (a) Crew members who are required to take a proficiency check, a test or competency check, or recurrent training to maintain qualification for commercial air transport operations may complete those requirements at any time during the eligibility period.
- (b) The eligibility period is defined as the three calendar month period including the month-prior, the month-due, and the month-after any due date specified by this subsection.
- (c) Completion of the requirement at any time during the period shall be considered as completed in the month-due for calculation of the next due date.

8.10.1.48 REDUCTIONS IN REQUIREMENTS

- (a) The Authority may authorise reductions in, or waive, certain portions of the training requirements of this subpart, taking into account the previous experience of the crew members.
- (b) Any AOC holder request for reduction or waiver shall be made in writing and outline the basis under which the request is made.
- (c) If the request was for a specific crew member, the correspondence from the Authority authorising the reduction and the basis for it shall be filed in the record the AOC holder maintains for that crew member.
- (d) A person who progresses successfully through flight training, is recommended by their instructor or a check airman, and successfully completes the appropriate flight check for a check airman, or is permitted by the Authority, to complete a course in less than programmed time, need not complete the programmed hours of flight training for the particular aeroplane.

Note: Whenever the Authority finds that 20 percent of the flight checks given at a particular training base during the previous 6 months are unsuccessful, this method of approval will not be used by the AOC holder at that base until the Authority finds that the effectiveness of the flight training there has improved.

8.10.1.49 RECORDS OF COSMIC RADIATION

For each flight of an aeroplane above 49 000 ft., each AOC holder shall maintain records so that the total cosmic radiation dose received by each crewmember over a period of 12 consecutive months can be determined.

8.11 REST PERIODS, DUTY, AND FLIGHT TIME: COMMERCIAL AIR TRANSPORT**8.11.1.1 APPLICABILITY**

This section is applicable to the rest, duty and flight time of critical personnel engaged in commercial air transport flight operations.

8.11.1.2 COMPLIANCE WITH SCHEDULING REQUIREMENTS

- (a) The Authority will consider a person in compliance with prescribed standards if he or she exceeds the prescribed flight duty limitations when—
 - (1) The flight is scheduled and normally terminates within the prescribed limitations; but
 - (2) Due to circumstances beyond the control of the AOC holder (such as adverse weather conditions) are not expected at the time of departure to reach the destination within the scheduled time.
- (b) The Authority will consider a person in compliance with prescribed duty limitations, if he or she exceeds those limitations during an emergency or adverse situations beyond the control of the AOC holder.

8.11.1.3 DUTY AND REST PERIODS

- (a) With respect to duty periods, no AOC holder may schedule:
- (1) A flight crew member for more than 16 hours of duty, except as prescribed in IS: 8.11.1.3.
 - (2) A flight crew member for more than 8 hours of flight deck duty in any 24 consecutive hours, except as prescribed in the implementing standards.
 - (3) A cabin attendant for more than 14 consecutive hours of duty, except as prescribed in the implementing standards.
 - (4) A dispatcher for more than 10 consecutive hours of duty within a 24 consecutive hour period, unless he or she is given an intervening rest period.

Note: A person is considered to be on duty if they are performing any tasks on behalf of the AOC holder, whether scheduled, requested or self initiated.

- (b) If an AOC holder requires a flight crew member to engage in deadhead transportation for more than 4 hours, one half of that time shall be treated as duty time, unless they are given 10 hours of rest on the ground before being assigned to flight duty.
- (c) With respect to rest periods, no AOC holder may assign, nor may any person—
- (1) Perform duties in commercial air transport unless that person has had at least the minimum rest period applicable to those duties as prescribed in IS: 8.11.1.3; or
 - (2) Accept an assignment to any duty with the AOC holder during any required rest period.

Note: The minimum rest period is considered to be 8 consecutive hours.

- (d) The AOC holder may exercise the option to reduce a crew member's rest period as provided in the implementing standards, which will require that the crew member's next rest period be longer.
- (e) The AOC holder shall relieve the flight crew member, flight operations officer, or cabin attendant from all duties for 24 consecutive hours during any 7 consecutive day period.

Note: Time spent in transportation, not local in character, that is required by the AOC holder to position crew members to or from flights is not considered part of a rest period.

Note: Time spent in transportation on aircraft (at the insistence of the AOC holder) to or from a crew member's home station is not considered part of a rest period.

Implementing Standard: See IS: 8.11.1.3 for a table consolidating all scheduling and actual event requirements.

8.11.1.4 DUTY ALOFT

- (a) The Authority will consider all time spent on an aircraft as an assigned or relief flight crew member, whether resting or performing tasks to be duty aloft.
- (b) The Authority will consider a flight crew member to be on continuous duty aloft unless he or she receives a rest period of 9 consecutive hours on the ground.
- (c) Each AOC holder shall provide adequate sleeping quarters, including a berth, on the aeroplane whenever a flight crew member is scheduled to be aloft for more than 12 hours during any 24 consecutive hours.

8.11.1.5 MAXIMUM NUMBER OF FLIGHT TIME HOURS

No AOC holder may schedule any flight crew member and no flight crew member may accept an assignment for flight time in commercial air transport, if that crew member's total flight time or duty aloft in commercial flying will exceed the limitations prescribed in the implementing standards.

Implementing Standard: See IS: for tables showing maximum flight time hours.

8.11.1.6 SPECIAL FLIGHT DUTY SCHEMES

- (a) The Authority may approve a special flight duty scheme for an AOC holder.
- (b) An AOC holder may elect to apply the flight crew member flight duty and rest requirements to the cabin attendants.

8.12 FLIGHT RELEASE: COMMERCIAL AIR TRANSPORT

8.12.1.1 APPLICABILITY

This Subpart is applicable to an AOC holder and the person designated by the AOC holder to issue a flight release.

8.12.1.2 QUALIFIED PERSONS REQUIRED FOR OPERATIONAL CONTROL FUNCTIONS

- (a) A qualified person shall be designated by the AOC holder to exercise the functions and responsibilities for operational control of each flight in commercial air transport.
- (b) For passenger-carrying flights, a licensed and qualified flight operations officer or equivalently qualified person shall be on-duty at an operations base to perform the operational control functions.
- (c) For all other flights, the qualified person exercising operational control responsibilities shall be available for consultation prior to, during and immediately following the flight operation.
- (d) For all flights, the PIC shares in the responsibility for operational control of the aircraft and has the situational authority to make decisions regarding operational control issues in-flight.
 - (1) Where a decision of the PIC differs from that recommended, the person making the recommendation shall make a record of the associated facts.

8.12.1.3 FUNCTIONS ASSOCIATED WITH OPERATIONAL CONTROL

- (a) The person exercising responsibility for operational control for an AOC holder shall—
 - (1) Authorise the specific flight operation;
 - (2) Ensure that an airworthy aircraft properly equipped for the flight is available;
 - (3) Ensure that qualified personnel and adequate facilities are available to support and conduct the flight;
 - (4) Ensure that proper flight planning and preparation is made;
 - (5) Ensure that flight locating and flight following procedures are followed; and
 - (6) For passenger-carrying flights, ensure the monitoring of the progress of the flight and the provision of information that may be necessary to safety.

8.12.1.4 OPERATIONAL CONTROL DUTIES

- (a) For passenger-carrying flights the qualified person performing the duties of a flight operations officer shall—
 - (1) Assist the PIC in flight preparation and provide the relevant information required;
 - (2) Assist the PIC in preparing the operational and ATC flight plans;
 - (3) Sign the dispatch copy of the flight release;
 - (4) Furnish the PIC while in flight, by appropriate means, with information which may be necessary for the safe conduct of the flight; and
 - (5) In the event of an emergency, initiate the applicable procedures contained in the AOC holder's operations manual.
- (b) A qualified person performing the operational control duties shall avoid taking any action that would conflict with the procedures established by—
 - (1) Air traffic control;
 - (2) The meteorological service;
 - (3) The communications service; or
 - (4) AOC holder.

8.12.1.5 CONTENTS OF A FLIGHT RELEASE/OPERATIONAL FLIGHT PLAN

- (a) The flight release/operational flight plan must contain at least the following information concerning each flight:
 - (1) Company or organisation name.
 - (2) Make, model, and registration number of the aircraft being used.
 - (3) Flight or trip number, and date of flight.
 - (4) Name of each flight crew member, cabin attendant, and PIC.
 - (5) Departure aerodrome, destination aerodromes, alternate aerodromes, and route.
 - (6) Minimum fuel supply (in gallons, pounds or kg's).
 - (7) A statement of the type of operation (e.g., IFR, VFR).
 - (8) The latest available weather reports, and forecasts for the destination aerodrome and alternate aerodromes.
 - (9) Any additional available weather information that the PIC considers necessary.

8.12.1.6 FLIGHT RELEASE: AIRCRAFT REQUIREMENTS

- (a) No person may issue a flight release for a commercial air transport operation unless the aircraft is airworthy and properly equipped for the intended flight operation.
- (b) No person may issue a flight release for a commercial air transport operation using an aircraft with inoperative instruments and equipment installed, except as specified in the Minimum Equipment List approved for the AOC holder for that type aircraft.

8.12.1.7 FLIGHT RELEASE: FACILITIES AND NOTAMS

- (a) No person may release an aircraft over any route or route segment unless there are adequate communications and navigational facilities in satisfactory operating condition as necessary to conduct the flight safely.
- (b) The flight operations officer shall ensure that the PIC is provided all available current reports or information on aerodrome conditions and irregularities of navigation facilities that may effect the safety of the flight.

Note: For their review of the operational flight plan, the PIC will be provided with all available NOTAMs with respect to the routing, facilities and aerodromes.

8.12.1.8 FLIGHT RELEASE: WEATHER REPORTS AND FORECASTS

- (a) No person may release a flight unless he or she is thoroughly familiar with reported and forecast weather conditions on the route to be flown.
- (b) No person may release a flight unless he or she has communicated all information and reservations they may have regarding weather reports and forecasts to the PIC.

8.12.1.9 FLIGHT RELEASE IN ICING CONDITIONS

- (a) No person may release an aircraft, when in their opinion or that of the PIC, the icing conditions that may be expected or are met exceed that for which the aircraft is certified and has sufficient operational de-icing or anti-icing equipment.
- (b) No person may release an aircraft any time conditions are such that frost, ice or snow may reasonably be expected to adhere to the aircraft, unless there is the available to the PIC at the aerodrome of departure adequate facilities and equipment to accomplish the procedures approved for the AOC holder by the Authority for ground de-icing and anti-icing.

8.12.1.10 FLIGHT RELEASE UNDER VFR OR IFR

No person may release a flight under VFR or IFR unless the weather reports and forecasts indicated that the flight can reasonably be expected to be completed as specified in the release.

8.12.1.11 FLIGHT RELEASE: MINIMUM FUEL SUPPLY

No person may issue a flight release for a commercial air transport operation unless the fuel supply specified in the release is equivalent to or greater than the minimum flight planning requirements of this Part, including anticipated contingencies.

8.12.1.12 FLIGHT RELEASE: AIRCRAFT LOADING AND PERFORMANCE

- (a) No person may issue a flight release unless he or she is familiar with the anticipated loading of the aircraft and is reasonably certain that the proposed operation will not exceed the—
 - (1) Centre of gravity limits;
 - (2) Aircraft operating limitations; and
 - (3) Minimum performance requirements.

8.12.1.13 FLIGHT RELEASE: AMENDMENT OR RE-RELEASE EN ROUTE

- (a) Each person who amends a flight release while the flight is en route shall record that amendment.
- (b) No person may amend the original flight release to change the destination or alternate aerodrome while the aircraft is en route unless the flight preparation requirements for routing, aerodrome selection and minimum fuel supply are met at the time of amendment or re-release.
- (c) No person may allow a flight to continue to an aerodrome to which it has been released if the weather reports and forecasts indicate changes which would render that aerodrome unsuitable for the original flight release.

8.12.1.14 FLIGHT RELEASE WITH AIRBORNE WEATHER RADAR EQUIPMENT

No person may release a large aeroplane carrying passengers under IFR or night VFR conditions when current weather reports indicate that thunderstorms, or other potentially hazardous weather conditions that can be detected with airborne weather radar, may reasonably be expected along the route to be flown, unless the airborne weather radar equipment is in satisfactory operating condition.

8.12.1.15 FLIGHT RELEASE: RETENTION OF RECORDS

Unless provided for elsewhere in the CARS, all records or data used for flight release of commercial air transport operations shall be retained for inspection by the authority for a period of at least 6 months.

PART 8 - IMPLEMENTING STANDARDS

CIVIL AVIATION REGULATIONS

SURINAME

VERSION 4.0

June 2006

For ease of reference, the number assigned to each implementing standard corresponds to its associated regulation. For example, IS: 8.2.1.5 would reflect a standard required in subsection 8.2.1.5.

IS: 8.2.1.5 INOPERATIVE INSTRUMENTS AND EQUIPMENT

- (a) This implementing standard authorises flight operations with inoperative instruments and equipment installed in situations where no master minimum equipment list (MMEL) is available and no MEL is required for the specific aircraft operation under these regulations.
- (b) The inoperative instruments and equipment may not be—
 - (1) Part of the VFR-day instruments and equipment prescribed in Part 7;
 - (2) Required on the aircraft's equipment list or the operations equipment list for the kind of flight operation being conducted;
 - (3) Required by Part 7 for the specific kind of flight operation being conducted; or
 - (4) Required to be operational by an airworthiness directive.
- (c) To be eligible for these provisions, the inoperative instruments and equipment shall be—
 - (1) Determined by the PIC not to be a hazard to safe operation;
 - (2) Deactivated and placarded *Inoperative*; and

Note: If deactivation of the inoperative instrument or equipment involves maintenance, it must be accomplished and recorded in accordance with Part 5.

- (3) Removed from the aircraft, the flight deck control placarded and the maintenance recorded in accordance with Part 5.
- (d) The following instruments and equipment may not be inoperative :
 - (1) Instruments and equipment that are either specifically or otherwise required by the certification airworthiness requirements and which are essential for safe operations under all operating conditions.
 - (2) Instruments and equipment required for operable condition by an airworthiness directive, unless the airworthiness directive provides otherwise.
 - (3) Instruments and equipment required for specific operations.

Note: The required instruments and equipment for specific operations are listed in Part 7.

IS: 8.5.1.5 USE OF NARCOTICS, DRUGS OR INTOXICATING LIQUOR

- (a) Whenever there is a reasonable basis to believe that a person may not be in compliance with 8.5.1.5 and upon the request of the Authority, that person shall furnish the Authority or authorise any clinic, doctor, or other person to release to the Authority, the results of each blood test taken for presence of alcohol or narcotic substances up to 8 hours before or immediately after acting or attempting to act as a crew members.
- (b) Any test information provided to the Authority under the provisions of this section may be used as evidence in any legal proceeding.

IS: 8.5.1.7 FLIGHT CREW MEMBERS AT DUTY STATIONS

- (a) A required flight crew member may leave the assigned duty station if the crew member is taking a rest period, and relief is provided—
 - (1) For the assigned PIC during the en route cruise portion of the flight by a pilot who holds an airline transport pilot licence and the appropriate ratings, and who is currently qualified as PIC or SIC, and is qualified as PIC of that aircraft during the en route cruise portion of the flight; and
 - (2) In the case of the assigned CP, by a pilot qualified to act as PIC or CP of that aircraft during en route operations.

IS: 8.8.1.8 INSTRUMENT APPROACH OPERATING MINIMA

- (a) Each AOC holder establishing aerodrome-operating minima shall have its method for determining such minima approved by the Authority.
- (b) Each AOC holder's method for determining aerodrome-operating minima shall accurately account for-
 - (1) The type, performance and handling characteristics of the aircraft;
 - (2) The composition and experience of the flight crew;
 - (3) The dimensions and characteristics of the runways selected for use;
 - (4) Aircraft equipment used for navigation and aircraft control during the approach to landing and the missed approach;
 - (5) Obstacles in the approach and missed approach areas and the obstacle clearance altitude/height for the intended instrument approach procedures;
 - (6) The means used to determine and report meteorological conditions; and
 - (7) The obstacles in the climb out areas and the necessary clearance margins.

IS: 8.6.2.11 EXTENDED RANGE OPERATIONS WITH TWIN-ENGINED AEROPLANES AND POLAR OPERATIONS

The CASAS approves ETOPS in accordance with the requirements and limitations in this IS.

Section I. *ETOPS Approvals: Airplanes with Two engines.*

- (a) *Propulsion system reliability for ETOPS.*
 - (1) Before the CASAS grants ETOPS operational approval, the operator must be able to demonstrate the ability to achieve and maintain the level of propulsion system reliability, if any, that is required for the ETOPS-approved airplane-engine combination to be used.
 - (2) Following ETOPS operational approval, the operator must monitor the propulsion system reliability for the airplane-engine combination used in ETOPS, and take action as required by CARS 9.4.1.13 for the specified IFSD rates.
- (b) *75 Minutes ETOPS —*
 - (1) *Caribbean/Western Atlantic Area.* The CASAS grants approvals to conduct ETOPS with maximum diversion times up to 75 minutes on Western Atlantic/Caribbean area routes as follows:
 - (i) The State of Design reviews the airplane-engine combination to ensure the absence of factors that could prevent safe operations. The airplane-engine combination need not be type-design-approved for ETOPS; however, it must have sufficient favorable experience to demonstrate to the CASAS a level of reliability appropriate for 75-minute ETOPS.
 - (ii) The AOC holder must comply with the requirements of 8.6.2.7 time-limited system planning.
 - (iii) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (iv) The certificate holder must comply with the maintenance program requirements of 9.4.1.13, except that a pre-departure service check before departure of the return flight is not required.
 - (2) *Other Areas.* The CASAS grants approvals to conduct ETOPS with maximum diversion times up to 75 minutes on other than Western Atlantic/Caribbean area routes as follows:
 - (i) The State of Design reviews the airplane-engine combination to ensure the absence of factors that could prevent safe operations. The airplane-engine combination need not be type-design-approved for ETOPS; however, it must have sufficient favorable experience to demonstrate to the CASAS a level of reliability appropriate for 75-minute ETOPS.

- (ii) The AOC holder must comply with the requirements of 8.6.2.7 for time-limited system planning.
 - (iii) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (iv) The AOC holder must comply with the maintenance program requirements of 9.4.1.13.
 - (v) The AOC holder must comply with the MEL in its operations specifications for 120-minute ETOPS.
- (c) *90-minute ETOPS (Micronesia)*. The CASAS grants approvals to conduct ETOPS with maximum diversion times up to 90 minutes on Micronesian area routes as follows:
- (1) The airplane-engine combination must be type-design approved for ETOPS of at least 120-minutes.
 - (2) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (3) The AOC holder must comply with the maintenance program requirements of 9.4.1.13, except that a pre-departure service check before departure of the return flight is not required.
 - (4) The AOC holder must comply with the MEL requirements in its operations specifications for 120-minute ETOPS.
- (d) *120-minute ETOPS*. The CASAS grants approvals to conduct ETOPS with maximum diversion times up to 120 minutes as follows:
- (1) The airplane-engine combination must be type-design-approved for ETOPS of at least 120 minutes.
 - (2) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (3) The AOC holder must comply with the maintenance program requirements of 9.4.1.13.
 - (4) The certificate holder must comply with the MEL requirements for 120-minute ETOPS.
- (e) *138-Minute ETOPS*. The CASAS grants approval to conduct ETOPS with maximum diversion times up to 138 minutes as follows:
- (1) *Operators with 120-minute ETOPS approval*. The CASAS grants 138-minute ETOPS approval as an extension of an existing 120-minute ETOPS approval as follows:
 - (i) The authority may be exercised only for specific flights for which the 120-minute diversion time must be exceeded.
 - (ii) For these flight-by-flight exceptions, the airplane-engine combination must be type-design-approved for ETOPS up to at least 120 minutes. The capability of the airplane's time-limited systems may not be less than 138 minutes calculated in accordance with 8.6.2.7.
 - (iii) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (iv) The AOC holder must comply with the maintenance program requirements of 9.4.1.13.
 - (v) The AOC holder must comply with minimum equipment list (MEL) requirements in its operations specifications for "beyond 120 minutes ETOPS". Operators without a "beyond 120-minute ETOPS" MEL may apply to CASAS for a modified MEL which satisfies the master MEL policy for system/component relief in ETOPS beyond 120 minutes.
 - (vi) The AOC holder must conduct training for maintenance, dispatch, and flight crew personnel regarding differences between 138-minute ETOPS authority and its previously-approved 120-minute ETOPS authority.
 - (2) *Operators with existing 180-minute ETOPS approval*. The CASAS grants approvals to conduct 138-minute ETOPS (without the limitation in paragraph (e)(1)(i) of section I of this IS to AOC holders with existing 180-minute ETOPS approval as follows:

- (i) The airplane-engine combination must be type-design-approved for ETOPS of at least 180 minutes.
 - (ii) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (iii) The AOC holder must comply with the maintenance program requirements of 9.4.1.13.
 - (iv) The AOC holder must comply with the MEL requirements for "beyond 120 minutes ETOPS."
 - (v) The AOC holder must conduct training for maintenance, dispatch and flight crew personnel for differences between 138-minute ETOPS diversion approval and its previously approved 180-minute ETOPS diversion authority.
- (f) *180-minute ETOPS.* The CASAS grants approval to conduct ETOPS with diversion times up to 180 minutes as follows:
- (1) For these operations the airplane-engine combination must be type-design-approved for ETOPS of at least 180 minutes.
 - (2) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (3) The AOC holder must comply with the maintenance program requirements of 9.4.1.13.
 - (4) The AOC holder must comply with the MEL requirements for "beyond 120 minutes ETOPS."
- (g) *Greater than 180-minute ETOPS.* The CASAS grants approval to conduct ETOPS greater than 180 minutes. The following are requirements for all operations greater than 180 minutes.
- (1) The CASAS grants approval only to certificate holders with existing 180-minute ETOPS operating authority for the airplane-engine combination to be operated.
 - (2) The AOC holder must have previous ETOPS experience satisfactory to the CASAS.
 - (3) In selecting ETOPS Alternate Airports, the operator must make every effort to plan ETOPS with maximum diversion distances of 180 minutes or less, if possible. If conditions necessitate using an ETOPS Alternate Airport beyond 180 minutes, the route may be flown only if the requirements for the specific operating area in paragraph (h) or (i) of section I of this IS are met.
 - (4) The AOC holder must inform the flight crew each time an airplane is proposed for dispatch for greater than 180 minutes and tell them why the route was selected.
 - (5) In addition to the equipment specified in the certificate holder's MEL for 180-minute ETOPS, the following systems must be operational for dispatch:
 - (i) The fuel quantity indicating system
 - (ii) The APU (including electrical and pneumatic supply and operating to the APU's designed capability)
 - (iii) The auto throttle system
 - (iv) The communication system required by 9.3.1.26
 - (v) One-engine-inoperative auto-land capability, if flight planning is predicated on its use
 - (6) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.
 - (7) The AOC holder must comply with the maintenance program requirements of 9.4.1.13
- (h) *207-minute ETOPS in the North Pacific Area of Operations*
- (1) The CASAS grants approval to conduct ETOPS with maximum diversion times up to 207 minutes in the North Pacific Area of Operations as an extension to 180-minute ETOPS authority to be used on an exception basis. This exception may be used only on a flight-by-flight basis when an ETOPS Alternate Airport is not available within 180 minutes for reasons such as political or military concerns; volcanic activity; temporary airport conditions; and airport weather below dispatch requirements or other weather related events.
 - (2) The nearest available ETOPS Alternate Airport within 207 minutes diversion time must be specified in the dispatch or flight release.
 - (3) In conducting such a flight the AOC holder must consider Air Traffic Service's preferred track.

- (4) The airplane-engine combination must be type-design-approved for ETOPS of at least 180 minutes. The approved time for the airplane's most limiting ETOPS significant system and most limiting cargo-fire suppression time for those cargo and baggage compartments required by regulation to have fire-suppression systems must be at least 222 minutes.
- (5) The AOC holder must track how many times 207-minute authority is used.
- (i) *240-minute ETOPS in the North Polar Area, in the area north of the NOPAC, and in the Pacific Ocean north of the equator.*
 - (1) (1) The CASAS grants approval to conduct 240-minute ETOPS authority with maximum diversion times in the North Polar Area, in the area north of the NOPAC area, and the Pacific Ocean area north of the equator as an extension to 180-minute ETOPS authority to be used on an exception basis. This exception may be used only on a flight-by-flight basis when an ETOPS Alternate Airport is not available within 180 minutes. In that case, the nearest available ETOPS Alternate Airport within 240 minutes diversion time must be specified in the dispatch or flight release.
 - (2) This exception may be used in the North Polar Area and in the area north of NOPAC only in extreme conditions particular to these areas such as volcanic activity, extreme cold weather at en-route airports, airport weather below dispatch requirements, temporary airport conditions, and other weather related events. The criteria used by the AOC holder to decide that extreme weather precludes using an airport must be established by the AOC holder, accepted by the CASAS, and published in the certificate holder's manual for the use of dispatchers and pilots.
 - (3) This exception may be used in the Pacific Ocean area north of the equator only for reasons such as political or military concern, volcanic activity, airport weather below dispatch requirements, temporary airport conditions and other weather related events.
 - (4) The airplane-engine combination must be type design approved for ETOPS greater than 180 minutes.
- (j) *240-minute ETOPS in areas South of the equator.*
 - (1) The CASAS grants approval to conduct ETOPS with maximum diversion times of up to 240 minutes in the following areas:
 - (i) Pacific oceanic areas between the U.S. West coast and Australia, New Zealand and Polynesia.
 - (ii) South Atlantic oceanic areas.
 - (iii) Indian Ocean areas.
 - (iv) Oceanic areas between Australia and South America.
 - (2) The operator must designate the nearest available ETOPS Alternate Airports along the planned route of flight.
 - (3) The airplane-engine combination must be type-design-approved for ETOPS greater than 180 minutes.
- (k) *ETOPS beyond 240 minutes*
 - (1) The CASAS grants approval to conduct ETOPS with diversion times beyond 240 minutes for operations between specified city pairs on routes in the following areas:
 - (i) The Pacific oceanic areas between the U.S. west coast and Australia, New Zealand, and Polynesia;
 - (ii) The South Atlantic oceanic areas;
 - (iii) The Indian Oceanic areas; and
 - (iv) The oceanic areas between Australia and South America, and the South Polar Area.
 - (2) This approval is granted to certificate holders who have been operating under 180-minute or greater ETOPS authority for at least 24 consecutive months, of which at least 12 consecutive months must be under 240-minute ETOPS authority with the airplane-engine combination to be used.
 - (3) The operator must designate the nearest available ETOPS alternate or alternates along the planned route of flight.

- (4) For these operations, the airplane-engine combination must be type-design-approved for ETOPS greater than 180 minutes.

Section II. *ETOPS Approval: Passenger-carrying Airplanes With More Than Two Engines.*

The CASAS grants approval to conduct ETOPS, as follows:

- (1) The airplane-engine combination must be type-design-approved for ETOPS.
- (2) The operator must designate the nearest available ETOPS Alternate Airports within 240 minutes diversion time (at one-engine-inoperative cruise speed under standard conditions in still air). If an ETOPS alternate is not available within 240 minutes, the operator must designate the nearest available ETOPS Alternate Airports along the planned route of flight.
- (3) The MEL limitations for the authorized ETOPS diversion time apply.
 - (i) The Fuel Quantity Indicating System must be operational.
 - (ii) The communications systems required by 9.3.1.26 must be operational.
- (4) The AOC holder must operate in accordance with the ETOPS authority as contained in its operations specifications.

Section III. *Approvals for operations whose airplane routes are planned to traverse either the North Polar or South Polar Areas*

- (a) In addition to any of the applicable requirements of sections I and II of this IS, the AOC holder's operations specifications must contain the following:
 - (1) The designation of airports that may be used for en-route diversions and the requirements the airports must meet at the time of diversion.
 - (2) Except for supplemental all-cargo operations, a recovery plan for passengers at designated diversion airports.
 - (3) A fuel-freeze strategy and procedures for monitoring fuel freezing.
 - (4)) A plan to ensure communication capability for these operations.
 - (5) An MEL for these operations.
 - (6) A training plan for operations in these areas.
 - (7) A plan for mitigating crew exposure to radiation during solar flare activity.

IS: 8.8.1.11 CATEGORY II AND III MANUAL

- (a) *Application for approval.* An applicant for approval of a Category II or III manual or an amendment to an approved Category II or III manual shall submit the proposed manual or amendment to the Authority. If the application requests an evaluation program, it shall include the following:
 - (1) The location of the aircraft and the place where the demonstrations are to be conducted; and
 - (2) The date the demonstrations are to commence (at least 10 days after filing the application).
- (b) *Contents.* Each Category II or III manual must contain:
 - (1) The registration number, make, and model of the aircraft to which it applies;
 - (2) A maintenance program; and
 - (3) The procedures and instructions related to recognition of DH, use of runway visual range (RVR) information, approach monitoring, the decision region (the region between the middle marker and the decision height), the maximum permissible deviations of the basic ILS indicator within the decision region, a missed approach, use of airborne low approach equipment, minimum altitude for the use of the autopilot, instrument and equipment failure warning systems, instrument failure, and other procedures, instructions, and limitations that may be found necessary by the Authority.

IS: 8.8.1.5 ALTIMETER SETTINGS

The lowest usable flight level is determined by the atmospheric pressure in the area of operation as shown in the following table.

Current Altimeter Setting	Lowest Usable Flight Level
29.92 (or higher)	040
29.91 through 29.42	045
29.41 through 28.92	050
28.91 through 28.42	055
28.41 through 27.92	060
27.91 through 27.42	065
27.41 through 26.92	070

IS: 8.8.2.11 UNIVERSAL AVIATION SIGNALS

- (a) *Distress signals.* The following signals, used either together or separately, mean that grave and imminent danger threatens, and immediate assistance is requested:

Note: None of the provisions in this section shall prevent the use, by an aircraft in distress, of any means at its disposal to attract attention, make known its position and obtain help.

Note: For full details of telecommunication transmission procedures for the distress and urgency signals, see ICAO Annex 10, Volume II, Chapter 5.

Note: For details of the search and rescue visual signals, see ICAO Annex 12.

- (1) A signal made by radiotelegraphy or by any other signalling method consisting of the group SOS (••• — — —••• in the Morse Code);
- (2) A signal sent by radiotelephony consisting of the spoken word MAYDAY;
- (3) Rockets or shells throwing red lights, fired one at a time at short intervals;
- (4) A parachute flare showing a red light.

Note: Article 41 of the ITU Radio Regulations (Nos. 3268, 3270 and 3271 refer) provides information on the alarm signals for actuating radiotelegraph and radiotelephone auto-alarm systems: 3268 The radiotelegraph alarm signal consists of a series of twelve dashes sent in one minute, the duration of each dash being four seconds and the duration of the interval between consecutive dashes one second. It may be transmitted by hand but its transmission by means of an automatic instrument is recommended. 3270 The radiotelephone alarm signal consists of two substantially sinusoidal audio frequency tones transmitted alternately. One tone shall have a frequency of 2 200 Hz and the other a frequency of 1 300 Hz, the duration of each tone being 250 milliseconds. 3271 The radiotelephone alarm signal, when generated by automatic means, shall be sent continuously for a period of at least thirty seconds but not exceeding one minute; when generated by other means, the signal shall be sent as continuously as practicable over a period of approximately one minute.

- (b) The following signals, used either together or separately, mean that an aircraft wishes to give notice of difficulties which compel it to land without requiring immediate assistance:
- (1) The repeated switching on and off of the landing lights; or
 - (2) The repeated switching on and off of the navigation lights in such manner as to be distinct from flashing navigation lights.
- (c) The following signals, used either together or separately, mean that an aircraft has a very urgent message to transmit concerning the safety of a ship, aircraft or other vehicle, or of some person on board or within sight:
- (1) A signal made by radiotelegraphy or by any other signalling method consisting of the group XXX.
 - (2) A signal sent by radiotelephony consisting of the spoken words PAN, PAN.
- (d) The following signals shall be used in the event of interception.
- (1) Signals initiated by intercepting aircraft and responses by intercepted aircraft.

<i>Series</i>	<i>INTERCEPTING Aircraft Signals</i>	<i>Meaning</i>	<i>INTERCEPTED Aircraft Responds</i>	<i>Meaning</i>
1	<p>DAY or NIGHT — Rocking aircraft and flashing navigational lights at irregular intervals (and landing lights in the case of a helicopter) from a position slightly above and ahead of, and normally to the left of, the intercepted aircraft (or to the right if the intercepted aircraft is a helicopter) and, after acknowledgement, a slow level turn, normally to the left, (or to the right in the case of a helicopter) on the desired heading.</p> <p><i>Note 1. — Meteorological conditions or terrain may require the intercepting aircraft to reverse the positions and direction of turn given above in Series 1.</i></p> <p><i>Note 2. — If the intercepting aircraft is not able to keep pace with the intercepted aircraft, the latter is expected to fly a series of race-track patterns and to rock the aircraft each time it passes the intercepted aircraft.</i></p>	You have been intercepted. Follow me.	DAY or NIGHT - Rocking aircraft, flashing navigational lights at irregular intervals and following.	Understood, will comply.
2	DAY or NIGHT — An abrupt break-away manoeuvre from the intercepted aircraft consisting of a climbing turn of 90 degrees or more without crossing the line of flight of the intercepted aircraft.	You may proceed.	DAY or NIGHT - Rocking the aircraft.	Understood, will comply.
3	DAY or NIGHT — Lowering landing gear (if fitted), showing steady landing lights and overflying runway in use or, if the intercepted aircraft is a helicopter, overflying the helicopter landing area. In the case of helicopters, the intercepting helicopter makes a landing approach, coming to hover near to the landing area.	Land at this aerodrome.	DAY or NIGHT - Lowering landing gear (if fitted), showing steady landing lights and following the intercepting aircraft and, if, after overflying the runway in use or helicopter landing area, landing is considered safe, proceeding to land.	Understood, will comply.

(2) Signals initiated by intercepted aircraft and responses by intercepting aircraft.

Series	INTERCEPTED Aircraft Signals	Meaning	INTERCEPTING Aircraft Responds	Meaning
4	DAY or NIGHT — Raising landing gear (if fitted) and flashing landing lights while passing over runway in use or helicopter landing area at a height exceeding 300 m (1,000 ft) but not exceeding 600 m (2,000 ft) (in the case of a helicopter, at a height exceeding 50 m (170 ft) but not exceeding 100 m (330 ft) above the aerodrome level, and continuing to circle runway in use or helicopter landing area. If unable to flash landing lights, flash any other lights available.	Aerodrome you have designated is inadequate.	DAY or NIGHT — If it is desired that the intercepted aircraft follow the intercepting aircraft to an alternate aerodrome, the intercepting aircraft raises its landing gear (if fitted) and uses the Series 1 signals prescribed for intercepting aircraft. If it is decided to release the intercepted aircraft, the intercepting aircraft uses the Series 2 signals prescribed for intercepting aircraft.	Understood, follow me. Understood, you may proceed.
5	DAY or NIGHT — Regular switching on and off of all available lights but in such a manner as to be distinct from flashing lights.	Cannot comply.	DAY or NIGHT — Use Series 2 signals prescribed for intercepting aircraft.	
6	DAY or NIGHT — Irregular flashing of all available lights.	In distress.	DAY or NIGHT — Use Series 2 signals prescribed for intercepting aircraft.	Understood

(e) *Visual signals used to warn an unauthorised aircraft.* By day and by night, a series of projectiles discharged from the ground at intervals of 10 seconds, each showing, on bursting, red and green lights or stars will indicate to an unauthorised aircraft that it is flying in or about to enter a restricted, prohibited, or danger area, and that the aircraft is to take such remedial action as may be necessary.

(f) *Signals for aerodrome traffic.* Aerodrome controllers shall use and pilots shall obey the following light and pyrotechnic signals:

Light	From Aerodrome Control to:	
	Aircraft in flight	Aircraft on the ground
Directed towards aircraft concerned (See Figure 1.1)	<ul style="list-style-type: none"> • Cleared to land • Give way to other aircraft and continue circling • Return for landing* • Aerodrome unsafe, do not land • Land at this aerodrome and proceed to apron* • Notwithstanding any previous instructions, do not land for the time being 	<ul style="list-style-type: none"> • Cleared for take-off • Stop • Cleared to taxi • Taxi clear of landing area in use • Return to starting point on the aerodrome

* Clearances to land and to taxi will be given in due course.

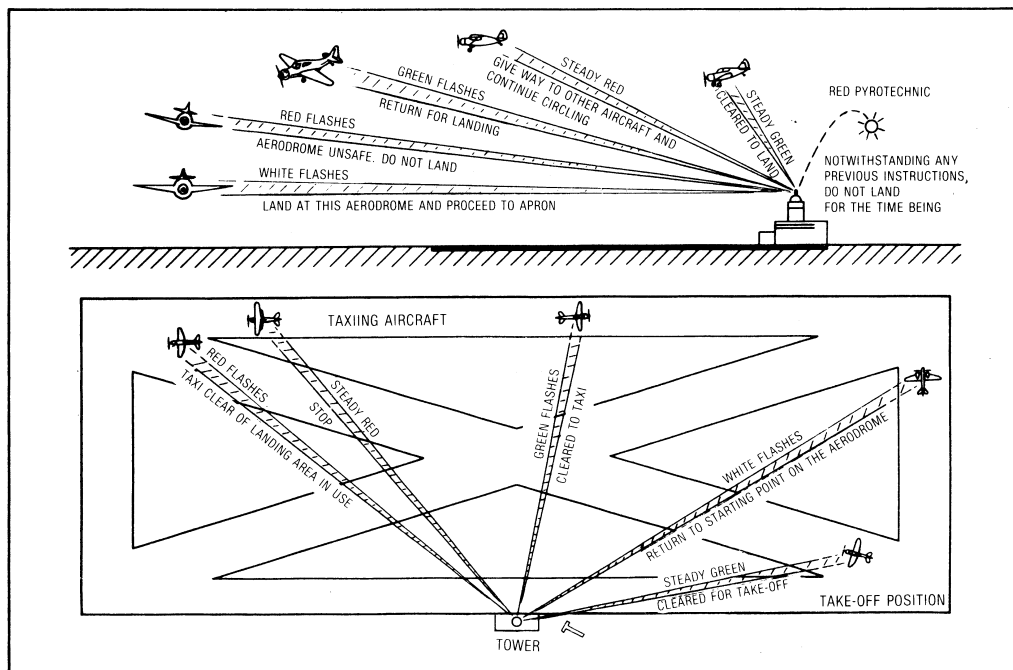


Figure 8.1

(g) Pilots shall acknowledge aerodrome controller signals as follows:

- (1) When in flight:
 - (i) During the hours of daylight by rocking the aircraft's wings;

Note. - This signal should not be expected on the base and final legs of the approach.

- (ii) During the hours of darkness by flashing on and off twice the aircraft's landing lights or, if not so equipped, by switching on and off twice its navigation lights.
- (2) When on the ground:
 - (i) During the hours of daylight by moving the aircraft's ailerons or rudder;
 - (ii) During the hours of darkness by flashing on and off twice the aircraft's landing lights or, if not so equipped, by switching on and off twice its navigation lights

(h) Aerodrome authorities shall use the following visual ground signals during the following situations:

- (1) *Prohibition of landing.* A horizontal red square panel with yellow diagonals (Figure 8.2) when displayed in a signal area indicates that landings are prohibited and that the prohibition is liable to be prolonged.




Figure 8.2

- (2) *Need for special precautions while approaching or landing.* A horizontal red square panel with one yellow diagonal (Figure 8.3) when displayed in a signal area indicates that owing to the bad state of the manoeuvring area, or for any other reason, special precautions must be observed in approaching to land or in landing.



Figure 8.3

(3) *Use of runways and taxiways.*

- (i) A horizontal white dumb-bell (Figure 8.4) when displayed in a signal area indicates that aircraft are required to land, take off and taxi on runways and taxiways only.



Figure 8.4

- (ii) The same horizontal white dumb-bell as in Figure 8.4, but with a black bar placed perpendicular to the shaft across each circular portion of the dumb-bell (Figure 8.5) when displayed in a signal area indicates that aircraft are required to land and take off on runways only, but other manoeuvres need not be confined to runways and taxiways




Figure 8.5

- (4) *Closed runways or taxiways.* Crosses of a single contrasting colour, yellow or white (Figure 8.6), displayed horizontally on runways and taxiways or parts thereof indicate an area unfit for movement of aircraft.



Figure 8.6

- (5) Directions for landing or take-off.
- (i) A horizontal white or orange landing T (Figure 8.7) indicates the direction to be used by aircraft for landing and take-off, which shall be in a direction parallel to the shaft of the T towards the cross arm.

Note: When used at night, the landing T is either illuminated or outlined in white coloured lights.




Figure 8.7

- (ii) A set of two digits (Figure 8.8) displayed vertically at or near the aerodrome control tower indicates to aircraft on the manoeuvring area the direction for take-off, expressed in units of 10 degrees to the nearest 10 degrees of the magnetic compass.



Figure 8.8

- (6) *Right-hand traffic.* When displayed in a signal area, or horizontally at the end of the runway or strip in use, a right-hand arrow of conspicuous colour (Figure 8.9) indicates that turns are to be made to the right before landing and after take-off.




Figure 8.9

- (7) *Air traffic services reporting office.* The letter C displayed vertically in black against a yellow background (Figure 8.10) indicates the location of the air traffic services reporting office.




Figure 8.10

- (8) *Glider flights in operation.* A double white cross displayed horizontally (Figure 8.11) in the signal area indicates that the aerodrome is being used by gliders and that glider flights are being performed.




Figure 8.11

- (i) The following marshalling signals shall be used from a signalman to an aircraft.

Note: These signals are designed for use by the signalman, with hands illuminated as necessary to facilitate observation by the pilot, and facing the aircraft in a position:

- (1) For fixed-wing aircraft, the signalman shall be positioned forward of the left-wing tip within view of the pilot and, for helicopters, where the signalman can best be seen by the pilot.

Note: The meaning of the relevant signals remains the same if bats, illuminated wands or torchlights are held.

Note: The aircraft engines are numbered, for the signalman facing the aircraft, from right to left (i.e. No. 1 engine being the port outer engine).

Note: Signals marked with an asterisk are designed for use to hovering helicopters.

- (2) Prior to using the following signals, the signalman shall ascertain that the area within which an aircraft is to be guided is clear of objects which the aircraft might otherwise strike.

Note: The design of many aircraft is such that the path of the wing tips, engines and other extremities cannot always be monitored visually from the flight deck while the aircraft is being manoeuvred on the ground.

1. To proceed under further guidance by signalman

Signalman directs pilot if traffic conditions on aerodrome require this action.

2. This bay

Arms above head in vertical position with palms facing inward.

3. Proceed to next signalman

Right or left arm down, other arm moved across the body and extended to indicate direction of next signalman.

4. Move ahead

Arms a little aside, palms facing backward and repeatedly moved upward-backward from shoulder height.

5. Turn

a) *Turn to your left:* right arm downward, left arm repeatedly moved upward-backward. Speed of arm movement indicating rate of turn.

b) *Turn to your right:* left arm downward, right arm repeatedly moved upward-backward. Speed of arm movement indicating rate of turn.

6. Stop

Arms repeatedly crossed above head (the rapidity of the arm movement should be related to the urgency of the stop, i.e. the faster the movement the quicker the stop).

7. Brakes

a) *Engage brakes.* raise arm and hand, with fingers extended, horizontally in front of body, then clench fist.

b) *Release brakes.* raise arm, with fist clenched, horizontally in front of body, then extend fingers.

8. Chocks

a) *Chocks inserted:* arms down, palms facing inwards, move arms from extended position inwards.

b) *Chocks removed:* arms down, palms facing outwards, move arms outwards.

9. Start engine(s)

Left hand overhead with appropriate number of fingers extended, to indicate the number of the engine to be started, and circular motion of right hand at head level.

10. Cut engines


Either arm and hand level with shoulder, hand across throat, palm downward. The hand is moved sideways with the arm remaining bent.

11. Slow down

Arms down with palms toward ground, then moved up and down several times.


12. Slow down engine(s) on indicated side

Arms down with palms toward ground, then either *right or left* hand waved up and down indicating the *left or right* side engine(s) respectively should be slowed down.

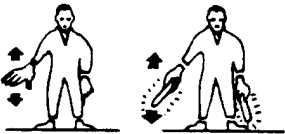


***18. Move downwards**

Arms extended horizontally to the side beckoning downwards, with palms turned down. Speed of movement indicates rate of descent.




13. Move back

Arms by sides, palms facing forward, swept forward and upward repeatedly to shoulder height.

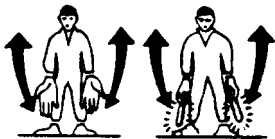

*** 19. Move horizontally**


Appropriate arm extended horizontally sideways in direction of movement and other arm moved in front of body in same direction, in a repeating movement.

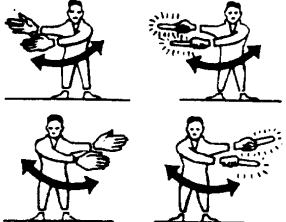

14. Turns while backing


a) *For tail to starboard:* point left arm down, and right arm brought from overhead, vertical position to horizontal forward position, repeating right arm movement.

b) *For tail to port:* point right arm down, and left arm brought from overhead, vertical position to horizontal forward position, repeating left arm movement.

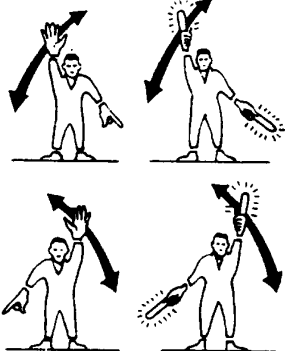


***20. Land**

Arms crossed and extended downwards in front of the body

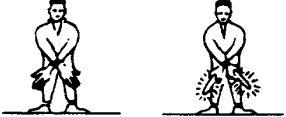


15. All clear

Right arm raised at elbow with thumb erect.

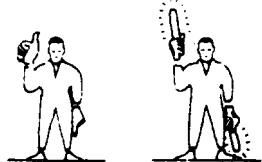


16. Hover

Arms extended horizontally sideways.



***17. Move upwards**

Arms extended horizontally to the side beckoning upwards, with palms turned up. Speed of movement indicates rate of ascent.

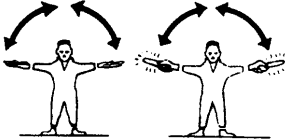

(j) Signals from the pilot of an aircraft to a signalman.

(1) The PIC or CP shall use the following signals when communicating with a signalman:

Note: These signals are designed for use by a pilot in the cockpit with hands plainly visible to the signalman, and illuminated as necessary to facilitate observation by the signalman.

Note: The aircraft engines are numbered in relation to the signalman facing the aircraft, from right to left (i.e. No. 1 engine being the port outer engine).

(2) *Brakes engaged:* raise arm and hand, with fingers extended, horizontally in front of face, then clench fist.

(3) *Brakes released.* raise arm, with fist clenched, horizontally in front of face, then extend fingers.

Note: The moment the fist is clenched or the fingers are extended indicates, respectively, the moment of brake engagement or release.

(4) *Insert chocks:* arms extended, palms outwards, move hands inwards to cross in front of face.

(5) *Remove chocks:* hands crossed in front of face, palms outwards, move arms outwards.

(6) *Ready to start engine(s).* Raise the appropriate number of fingers on one hand indicating the number of the engine to be started.

INTERCEPTION OF CIVIL AIRCRAFT

1 Principles to be observed by States

1.1 To achieve the uniformity in regulations which is necessary for the safety of navigation of civil aircraft due regard shall be had by Contracting States to the following principles when developing regulations and administrative directives:

- a) Interception of civil aircraft will be undertaken only as a last resort;
- b) If undertaken, an interception will be limited to determining the identity of the aircraft, unless it is necessary to return the aircraft to its planned track, direct it beyond the boundaries of national airspace, guide it away from a prohibited, restricted or danger area or instruct it to effect a landing at a designated aerodrome;
- c) Practice interception of civil aircraft will not be undertaken;
- d) Navigational guidance and related information will be given to an intercepted aircraft by radiotelephony, whenever radio contact can be established; and
- e) In the case where an intercepted civil aircraft is required to land in the territory overflown, the aerodrome designated for the landing is to be suitable for the safe landing of the aircraft type concerned.

Note- In the unanimous adoption by the 25th Session (Extraordinary) of the ICAO Assembly on 10 May 1984 of Article 3 bis is to the Convention on International Civil Aviation, the Contracting States have recognised that "every State must refrain from resorting to the use of weapons against civil aircraft in flight. "

1.2 Contracting States shall publish a standard method that has been established for the manoeuvring of aircraft intercepting a civil aircraft. Such method shall be designed to avoid any hazard for the intercepted aircraft.

1.3 Contracting States shall ensure that provision is made for the use of secondary surveillance radar, where available, to identify civil aircraft in areas where they may be subject to interception.

2 Action by intercepted aircraft

2.1 An aircraft which is intercepted by another aircraft shall immediately:

- a) Follow the instructions given by the intercepting aircraft, interpreting and responding to visual signals in accordance with the specifications in Appendix 1;
- b) Notify, if possible, the appropriate air traffic services unit;
- c) Attempt to establish radio communication with the intercepting aircraft or with the appropriate intercept control unit, by making a general call on the emergency frequency 121.5 MHz, giving the identity of the intercepted aircraft and the nature of the flight; and if no contact has been established and if practicable, repeating this call on the emergency frequency 243 MHz;
- d) If equipped with SSR transponder, select Mode A, Code 7700, unless otherwise instructed by the appropriate air traffic services unit.

2.2 If any instructions received by radio from any sources conflict with those given by the intercepting aircraft by visual signals, the intercepted aircraft shall request immediate clarification while continuing to comply with the visual instructions given by the intercepting aircraft.

2.3 If any instructions received by radio from any sources conflict with those given by the intercepting aircraft by radio, the intercepted aircraft shall request immediate clarification while continuing to comply with the radio instructions given by the intercepting aircraft.

(k) Radio communication during interception

- (1) If radio contact is established during interception but communication in a common language is not possible, attempts shall be made to convey instructions, acknowledgement of instructions and essential information by using the phrases and pronunciations in the table below and transmitting each phrase twice:

Phrases for use by INTERCEPTING aircraft			Phrases for use by INTERCEPTED aircraft		
Phrase	Pronunciation ¹	Meaning	Phrase	Pronunciation ¹	Meaning
CALL SIGN	KOL SA-IN	What is your call sign?	CALL SIGN (call sign) ²	<u>KOL</u> SA-IN (call sign)	My call sign is (call sign)
FOLLOW	FOL-LO	Follow me	WILCO	<u>VILL</u> -KO	Understood Will comply
DESCEND	DEE-SEND	Descend for landing	CAN NOT	<u>KANN</u> NOTT	Unable to comply
YOU LAND	YOU LAAND	Land at this aerodrome	REPEAT	<u>REE-PEET</u>	Repeat your instruction
PROCEED	PRO-SEED	You may proceed	AM LOST	<u>AM LOSST</u>	Position unknown
			MAYDAY	<u>MAYDAY</u>	I am in distress
			HIJACK ³	<u>HI-JACK</u>	I have been hijacked
			LAND (place name)	LAAND (place name)	I request to land at (place name)
			DESCEND	<u>DEE-SEND</u>	I require descent

1. In the second column, syllables to be emphasised are underlined.
 2. The call sign required to be given is that used in radiotelephone, communications with air traffic services units and corresponding to the aircraft identification in the flight plan.
 3. Circumstances may not always permit, nor make desirable, the use of the phrase "HIJACK".

5

(l) Cruising Levels

- (1) The PIC shall observe the following cruising levels except when, on the basis of regional air navigation agreements, a modified table of cruising levels based on a nominal vertical separation minimum of less than 600 m (2,000 ft) but not less than 300 m (1,000 ft) is prescribed for use, under specified conditions, by aircraft operating above FL 290 within designated portions of the airspace.

TRACK**											
From 000 Degrees to 179 Degrees***						From 180 Degrees to 359 Degrees***					
IFR Flights			VFR Flights			IFR Flights			VFR Flights		
Altitude			Altitude			Altitude			Altitude		
FL	Meters	Feet	FL	Meters	Feet	FL	Meters	Feet	FL	Meters	Feet
-90	—	—	—	—	—	0	—	—	—	—	—
10	300	1000	—	—	—	20	600	2000	—	—	—
30	900	3000	35	1050	3500	40	1200	4000	45	1350	4500
50	1500	5000	55	1700	5500	60	1850	6000	65	2000	6500
70	2150	7000	75	2300	7500	50	2450	8000	85	2600	8500
90	2750	9000	95	2900	9500	100	3050	10000	105	3200	10500
110	3350	11000	115	3500	11500	120	3650	12000	125	3800	12500
130	3950	13000	135	4100	13500	140	4250	14000	145	4400	14500
150	4550	15000	155	4700	15500	160	4900	16000	165	5050	16500
170	5200	17000	175	5300	17500	180	5500	18000	185	5650	18500
190	5800	19000	195	5900	19500	200	6100	20000	205	6250	20500
210	6400	21000	215	6550	21500	220	6700	22000	225	6850	22500
230	7000	23000	235	7150	23500	240	7300	24000	245	7450	24500
250	7600	25000	255	7750	25500	260	7900	26000	265	8100	26500
270	8250	27000	275	8100	27500	280	8550	28000	285	8700	28500
290	8850	29000	300	9150	30000	310	9450	31000	320	9750	32000
330	10050	33000	340	10350	34000	350	10650	35000	360	10950	36000
370	11300	37000	380	11600	38000	390	11900	39000	400	12200	40000
410	12500	41000	420	12500	42000	430	13100	43000	440	13400	44000
450	13700	45000	460	14000	46000	470	14350	47000	480	14650	48000
490	14950	49000	500	15250	50000	510	15550	51000	520	15850	52000
etc.	etc.	etc.	etc.	etc.	etc.	etc.	etc.	etc.	etc.	etc.	etc.

**Magnetic track, or in polar areas at latitudes higher than 70 degrees and within such extensions to those areas as may be prescribed by the appropriate ATS authorities, grid tracks as determined by a network of lines parallel to the Greenwich Meridian superimposed on a polar stereographic chart in which the direction towards the North Pole is employed as the Grid North.

***Except where, on the basis of regional air navigation agreements, from 090 to 269 degrees and from 270 to 089 degrees is prescribed to accommodate predominant traffic directions and appropriate transition procedures to be associated therewith are specified.

IS: 8.9.2.10 EXIT ROW SEATING

- (a) No cabin attendant may seat a person in a passenger exit seat if it is likely that the person would be unable to perform one or more of the applicable functions listed below—
- (1) The person lacks sufficient mobility, strength, or dexterity in both arms and hands, and both legs—
 - (i) To reach upward, sideways, and downward to the location of emergency exit and exit-slide operating mechanisms;
 - (ii) To grasp and push, pull, turn, or otherwise manipulate those mechanisms;
 - (iii) To push, shove, pull, or otherwise open emergency exits;
 - (iv) To lift out, hold, deposit on nearby seats, or manoeuvre over the seatbacks to the next row objects the size and mass of over-wing window exit doors;
 - (v) To remove obstructions of size and mass similar to over-wing exit doors;
 - (vi) To reach the emergency exit expeditiously;
 - (vii) To maintain balance while removing obstructions;
 - (viii) To exit expeditiously;
 - (ix) To stabilise an escape slide after deployment; or
 - (x) To assist others in getting off an escape slide;
 - (2) The person is less than 15 years of age or lacks the capacity to perform one or more of the applicable functions listed above without the assistance of an adult companion, parent, or other relative;
 - (3) The person lacks the ability to read and understand instructions required by this section and related to emergency evacuation provided by the AOC holder in printed or graphic form or the ability to understand oral crew commands,
 - (4) The person lacks sufficient visual capacity to perform one or more of the above functions without the assistance of visual aids beyond contact lenses or eyeglasses;
 - (5) The person lacks sufficient aural capacity to hear and understand instructions shouted by flight attendants, without assistance beyond a hearing aid;
 - (6) The person lacks the ability adequately to impart information orally to other passengers; or
 - (7) The person has a condition or responsibilities, such as caring for small children, that might prevent the person from performing one or more of the functions listed above; or a condition that might cause the person harm if he or she performs one or more of the functions listed above.
- (b) Determinations as to the suitability of each person permitted to occupy an exit seat shall be made by the cabin attendants or other persons designated in the AOC holder's operations manual.
- (c) In the event a cabin attendant determines that a passenger assigned to an exit seat would be unable to perform the emergency exit functions, or if a passenger requests a non-exit seat, the cabin attendant shall expeditiously relocate the passenger to a non-exit seat.
- (d) In the event of full booking in the non-exit seats, and if necessary to accommodate a passenger being relocated from an exit seat, the cabin attendant shall move a passenger who is willing and able to assume the evacuation functions, to an exit seat.
- (e) Each AOC ticket agent shall, prior to boarding, assign seats consistent with the passenger selection criteria and the emergency exit functions, to the maximum extent feasible.
- (f) Each AOC ticket agent shall make available for inspection by the public at all passenger loading gates and ticket counters at each aerodrome where it conducts passenger operations, written procedures established for making determinations in regard to exit row seating,
- (g) Each cabin attendant shall include in their passenger briefings a request that a passenger identify himself or herself to allow reseating if he or she—
- (1) Cannot meet the selection criteria;
 - (2) Has a nondiscernible condition that will prevent him or her from performing the evacuation functions;

- (3) May suffer bodily harm as the result of performing one or more of those functions; or
- (4) Does not wish to perform emergency exit functions.
- (h) Each cabin attendant shall include in their passenger briefings a reference to the passenger information cards and the functions to be performed in an emergency exit.
- (i) Each passenger shall comply with instructions given by a crew member or other authorised employee of the AOC holder implementing exit seating restrictions
- (j) No PIC may allow taxi or pushback unless at least one required crew member has verified that all exit rows and escape paths are unobstructed and that no exit seat is occupied by a person the crew member determines is likely to be unable to perform the applicable evacuation functions.
- (k) The procedures required by this standard will not become effective until final approval is granted by the Authority. Approval will be based solely upon the safety aspects of the AOC holder's procedures. In order to comply with this standard AOC holders shall—
 - (1) Establish procedures that address the requirements of this standard; and
 - (2) Submit their procedures for preliminary review and approval to the Authority

IS: 8.9.2.14 CARRIAGE OF CARGO IN PASSENGER COMPARTMENTS

- (a) Cargo may be carried anywhere in the passenger compartment if it is carried in an approved cargo bin that meets the following requirements—
 - (1) The bin must withstand the load factors and emergency landing conditions applicable to the passenger seats of the aircraft in which the bin is installed, multiplied by a factor of 1.15, using the combined mass of the bin and the maximum mass of cargo that may be carried in the bin;
 - (2) The maximum mass of cargo that the bin is approved to carry and any instructions necessary to insure proper mass distribution within the bin must be conspicuously marked on the bin;
 - (3) The bin may not impose any load on the floor or other structure of the aircraft that exceeds the load limitations of that structure;
 - (4) The bin must be attached to the seat tracks or to the floor structure of the aeroplane, and its attachment must withstand the load factors and emergency landing conditions applicable to the passenger seats of the aeroplane in which the bin is installed, multiplied by either the factor 1.15 or the seat attachment factor specified for the aircraft, whichever is greater, using the combined mass of the bin and the maximum mass of cargo that may be carried in the bin;
 - (5) The bin may not be installed in a position that restricts access to or use of any required emergency exit, or of the aisle in the passenger compartment;
 - (6) The bin must be fully enclosed and made of material that is at least flame resistant;
 - (7) Suitable safeguards must be provided within the bin to prevent the cargo from shifting under emergency landing conditions; and
 - (8) The bin may not be installed in a position that obscures any passenger's view of the "seat belt" sign, "no smoking" sign, or any required exit sign, unless an auxiliary sign or other approved means for proper notification of the passenger is provided.
- (b) Cargo, including carry-on baggage, may be carried anywhere in the passenger compartment of a small (Group B) aircraft if it is carried in an approved cargo rack, bin, or compartment installed in or on the aircraft, if it is secured by an approved means, or if it is carried in accordance with each of the following—
 - (1) For cargo, it is properly secured by a safety belt or other tie-down having enough strength to eliminate the possibility of shifting under all normally anticipated flight and ground conditions, or for carry-on baggage, it is restrained so as to prevent its movement during air turbulence;
 - (2) It is packaged or covered to avoid possible injury to occupants;

- (3) It does not impose any load on seats or in the floor structure that exceeds the load limitation for those components;
- (4) It is not located in a position that obstructs the access to, or use of, any required emergency or regular exit, or the use of the aisle between the crew and the passenger compartment, or is located in a position that obscures any passenger's view of the "seat belt" sign, "no smoking" sign or placard, or any required exit sign, unless an auxiliary sign or other approved means for proper notification of the passengers is provided;
- (5) It is not carried directly above seated occupants.
- (6) It is stowed in compliance with these restrictions during takeoff and landing.
- (7) For cargo-only operations, if the cargo is loaded so that at least one emergency or regular exit is available to provide all occupants of the aircraft a means of unobstructed exit from the aircraft if an emergency occurs.

IS: 8.10.1.9 COMPANY PROCEDURES INDOCTRINATION

- (a) Each AOC holder shall ensure that all operations personnel are provided company indoctrination training that covers the following areas:
 - (1) AOC holder's organisation, scope of operation, and administrative practices as applicable to their assignments and duties.
 - (2) Appropriate provisions of these regulations and other applicable regulations and guidance materials.
 - (3) AOC holder policies and procedures.
 - (4) Applicable crew member manuals.
 - (5) Appropriate portions of the AOC holder's operations manual.
- (b) The AOC holder shall provide a minimum of 40 programmed hours of instruction for company procedures indoctrination training unless a reduction is determined appropriate by the Authority.

IS: 8.10.1.10 INITIAL DANGEROUS GOODS TRAINING

- (a) Each AOC holder not holding a permanent approval to carry dangerous goods shall ensure that—
 - (1) Personnel engaged in general cargo handling have received training to carry out their duties in respect of dangerous goods. At a minimum this training shall cover the areas identified in Column 1 of Table 1 and be to a depth sufficient to ensure that an awareness is gained of the hazards associated with dangerous goods and how to identify such goods; and
 - (2) Aircraft crew members, passenger handling staff; and security staff employed by the AOC holder who deal with the screening of a passengers and their baggage, have received training which, at a minimum, shall cover the areas identified in Column 2 of Table 1 and be to a depth sufficient to ensure that an awareness is gained of the hazards associated with dangerous goods, how to identify them and what requirements apply to the carriage of such goods by passengers.

Table 1

Areas Of Dangerous Goods Training	1	2
General Philosophy	x	x
Limitations On Dangerous Goods In Air Transport	x	x
Package Marking And Labelling	x	x
Dangerous Goods In Passengers Baggage		x
Emergency Procedures		x

Note: x indicates an area to be covered.

- (b) Each AOC holder holding a permanent approval to carry dangerous goods shall ensure that—
 - (1) Personnel engaged in the acceptance of dangerous goods have received training and are qualified to carry out their duties. At a minimum, this training shall cover the areas identified in Column 1 of Table 2

- and be to a depth sufficient to ensure the staff can take decisions on the acceptance or refusal of dangerous goods offered for carriage by air;
- (2) Personnel engaged in ground handling, storage and loading of dangerous goods have received training to enable them to carry out their duties in respect of dangerous goods. At a minimum, this training shall cover the areas identified in Column 2 of Table 2 and be to a depth sufficient to ensure that an awareness is gained of the hazards associated with dangerous goods, how to identify such goods and how to handle and load them;
 - (3) Personnel engaged in general cargo handling have received training to enable them to carry out their duties in respect of dangerous goods. At a minimum, this training shall cover the areas identified in Column 3 of Table 2 and be to a depth sufficient to ensure that an awareness is gained of the hazards associated with dangerous goods, how to identify such goods and how to handle and load them;
 - (4) Flight crew members have received training which, at a minimum, shall cover the areas identified in Column 4 of Table 2. Training shall be to a depth sufficient to ensure that an awareness is gained of the hazards associated with dangerous goods and how they should be carried on an aeroplane; and
 - (5) Passenger handling staff; security staff employed by the operator who deal with the screening of passengers and their baggage; and crew members (other than flight crew members) have received training which, at a minimum, shall cover the areas identified in Column 5 of Table 2. Training shall be to a depth sufficient to ensure that an awareness is gained of the hazards associated with dangerous goods and what requirements apply to the carriage of such goods by passengers or, more generally, their carriage on an aeroplane.
- (c) Each AOC holder shall ensure that all personnel who require dangerous goods training receive recurrent training at intervals of not longer than 2 years.
 - (d) Each AOC holder shall ensure that records of dangerous goods training are maintained for all personnel required such training and that these records are maintained at the location where the personnel perform such duties.
 - (e) Each AOC holder shall ensure that its handling agent's staff are trained in accordance with the applicable column of Table 1 or Table 2.

Table 2

Areas Of Training	1	2	3	4	5
General Philosophy	x	x	x	x	x
Limitations On Dangerous Goods In The Air Transport	x	x	x	x	x
Classification And List Of Dangerous Goods	x	x		x	
General Packing Requirements And Packing Instructions	x				
Packaging Specifications Marking	x				
Package Marking And Labelling	x	x	x	x	x
Documentation From The Shipper	x				
Acceptance Of Dangerous Good, Including The Use Of A Checklist	x				
Loading, Restrictions On Loading And Segregation	x	x	x	x	
Inspections For Damage Or Leakage And Decontamination Procedures	x	x			
Provision Of Information To Commander	x	x		x	
Dangerous Goods In Passengers' Baggage	x			x	x
Emergency Procedures	x	x		x	x

Note: x indicates an area to be covered.

- (f) An AOC holder shall provide dangerous goods training manuals which contain adequate procedures and information to assist personnel in identifying packages marked or labelled as containing hazardous materials including—
 - (i) Instructions on the acceptance, handling, and carriage of hazardous materials;
 - (ii) Instructions governing the determination of proper shipping names and hazard classes;
 - (iii) Packaging, labelling, and marking requirements;

- (iv) Requirements for shipping papers, compatibility requirements, loading, storage, and handling requirements; and
- (v) Restrictions.

IS: 8.10.1.12 INITIAL CREW RESOURCE MANAGEMENT TRAINING

- (a) Each AOC holder shall ensure that the flight operations officer and all aircraft crew members have CRM training as part of their initial and recurrent training requirements.
- (b) A CRM training program shall include—
 - (1) An initial indoctrination/awareness segment;
 - (2) A method to provide recurrent practice and feedback; and
 - (3) A method of providing continuing reinforcement.
- (c) Curriculum topics to be contained in an initial CRM training course include—
 - (1) Communications processes and decision behaviour;
 - (2) Internal and external influences on interpersonal communications;
 - (3) Barriers to communication;
 - (4) Listening skills;
 - (5) Decision making skills;
 - (6) Effective briefings;
 - (7) Developing open communications;
 - (8) Inquiry, advocacy, and assertion training;
 - (9) Crew self-critique;
 - (10) Conflict resolution;
 - (11) Team building and maintenance;
 - (12) Leadership and followership training;
 - (13) Interpersonal relationships;
 - (14) Workload management;
 - (15) Situational awareness;
 - (16) How to prepare, plan and monitor task completions;
 - (17) Workload distribution;
 - (18) Distraction avoidance;
 - (19) Individual factors; and
 - (20) Stress reduction.

IS: 8.10.1.13 INITIAL EMERGENCY EQUIPMENT DRILLS

- (a) Each aircraft crew member shall accomplish emergency training during the specified training periods, using those items of installed emergency equipment for each type of aircraft in which he or she is to serve:
- (b) During initial training, each aircraft crew member shall perform the following one-time emergency drills—
 - (1) Protective Breathing Equipment/Fire fighting Drill:
 - (i) Locate source of fire or smoke (actual or simulated fire).
 - (ii) Implement procedures for effective crew co-ordination and communication, including notification of flight crew members about fire situation.
 - (iii) Don and activate installed PBE or approved PBE simulation device.
 - (iv) Manoeuvre in limited space with reduced visibility.
 - (v) Effectively use the aircraft's communication system.

- (vi) Identify class of fire.
 - (vii) Select the appropriate extinguisher.
 - (viii) Properly remove extinguisher from securing device.
 - (ix) Prepare, operate and discharge extinguisher properly.
 - (x) Utilise correct fire fighting techniques for type of fire.
- (2) Emergency Evacuation Drill:
- (i) Recognise and evaluate an emergency.
 - (ii) Assume appropriate protective position.
 - (iii) Command passengers to assume protective position.
 - (iv) Implement crew co-ordination procedures.
 - (v) Ensure activation of emergency lights.
 - (vi) Assess aircraft conditions.
 - (vii) Initiate evacuation (dependent on signal or decision).
 - (viii) Command passengers to release seatbelts and evacuate.
 - (ix) Assess exit and redirect, if necessary; to open exit, including deploying slides and commanding helpers to assist.
 - (x) Command passengers to evacuate at exit and run away from aircraft.
 - (xi) Assist special need passengers, such as handicapped, elderly, and persons in a state of panic.
 - (xii) Actually exit aircraft or training device using at least one of the installed emergency evacuation slides.

Note: The crew member may either observe the aircraft exits being opened in the emergency mode and the associated exit slide/raft pack being deployed and inflated, or perform the tasks resulting in the accomplishment of these actions

- (c) Each aircraft crew member shall accomplish additional emergency drills during initial and recurrent training, including performing the following emergency drills—
- (1) Emergency Exit Drill:
- (i) Correctly pre-flight each type of emergency exit and evacuation slide or slideraft (if part of cabin attendant's assigned duties).
 - (ii) Disarm and open each type of door exit in normal mode.
 - (iii) Close each type of door exit in normal mode.
 - (iv) Arm of each type of door exit in emergency mode.
 - (v) Opening each type of door exit in emergency mode.
 - (vi) Use manual slide inflation system to accomplish or ensure slide or slideraft inflation.
 - (vii) Open each type of window exit.
 - (viii) Remove escape rope and position for use.
- (2) Hand Fire Extinguisher Drill:
- (i) Pre-flight each type of hand fire extinguisher.
 - (ii) Locate source of fire or smoke and identify class of fire.
 - (iii) Select appropriate extinguisher and remove from securing device.
 - (iv) Prepare extinguisher for use.
 - (v) Actually operate and discharge each type of installed hand fire extinguisher.

Note: Fighting an actual or a simulated fire is not necessary during this drill.

- (vi) Utilise correct firefighting techniques for type of fire.
 - (vii) Implement procedures for effective crew co-ordination and communication, including notification of crew members about the type of fire situation.
- (3) Emergency Oxygen System Drill:
- (i) Actually operate portable oxygen bottles, including masks and tubing.

- (ii) Verbally demonstrate operation of chemical oxygen generators.
- (iii) Prepare for use and operate oxygen device properly, including donning and activation.
- (iv) Administer oxygen to self, passengers, and to those persons with special oxygen needs.
- (v) Utilise proper procedures for effective crew co-ordination and communication.
- (vi) Activate PBE.
- (vii) Manually open each type of oxygen mask compartment and deploy oxygen masks.
- (viii) Identify compartments with extra oxygen masks.
- (ix) Implement immediate action decompression procedures.
- (x) Reset oxygen system, if applicable.
- (4) Flotation Device Drill:
 - (i) Don and inflate life vests.
 - (ii) Remove and use flotation seat cushions.
 - (iii) Demonstrate swimming techniques using a seat cushion.
- (5) Ditching Drill, if applicable:

Note: During a ditching drill students shall perform the "prior to impact" and "after impact" procedures for a ditching, as appropriate to the specific operator's type of operation.

- (i) Implement crew co-ordination procedures, including briefing with captain to obtain pertinent ditching information and briefing flight attendants.
- (ii) Co-ordinate time frame for cabin and passenger preparation.
- (iii) Adequately brief passengers on ditching procedures.
- (iv) Ensure cabin is prepared, including the securing of carry-on baggage, lavatories, and galleys.
- (v) Demonstrate how to properly deploy and inflate sliderafts.
- (vi) Remove, position, attach sliderafts to aircraft.
- (vii) Inflate rafts.
- (viii) Use escape ropes at overwing exits.
- (ix) Command helpers to assist.
- (x) Use slides and seat cushions as flotation devices.
- (xi) Remove appropriate emergency equipment from aircraft.
- (xii) Board rafts properly.
- (xiii) Initiate raft management procedures (i.e., Disconnecting rafts from aircraft, applying immediate first aid, rescuing persons in water, salvaging floating rations and equipment, deploying sea anchor, tying rafts together, activating or ensuring operation of emergency locator transmitter).
- (xiv) Initiate basic survival procedures (i.e., Removing and utilising survival kit items, repairing and maintaining raft, ensuring protection from exposure, erecting canopy, communicating location, providing continued first aid, providing sustenance).
- (xv) Use heaving line to rescue persons in water.
- (xvi) Tie sliderafts or rafts together.
- (xvii) Use life line on edge of slideraft or raft as a handhold.
- (xviii) Secure survival kit items.
- (d) Each aircraft crew member shall accomplish additional emergency drill requirements during initial and recurrent training including observing the following emergency drills—
 - (1) Liferaft Removal and Inflation Drill, if applicable:
 - (i) Removal of a liferaft from the aircraft or training device.
 - (ii) Inflation of a liferaft.
 - (2) Slideraft Transfer Drill:
 - (i) Transfer of each type of slideraft pack from an unusable door to a usable door.

- (ii) Disconnect slideraft at unusable door.
- (iii) Redirect passengers to usable slideraft.
- (iv) Installation and deployment of slideraft at usable door.
- (3) Slide and Slideraft Deployment, Inflation, and Detachment Drill:
 - (i) Engage slide girt bar in floor brackets.
 - (ii) Inflate slides with and without quick-release handle (manually and automatically).
 - (iii) Disconnecting slide from aircraft for use as a flotation device.
Arm sliderafts for automatic inflation.
 - (iv) Disconnecting slideraft from the aircraft.
- (4) Emergency Evacuation Slide Drill:
 - (i) Open armed exit with slide or slideraft deployment and inflation.
 - (ii) Egress from aircraft via the evacuation slide and run away to a safe distance.

IS: 8.10.1.14(B) INITIAL AIRCRAFT GROUND TRAINING - FLIGHT CREW

- (a) Each AOC holder shall have an initial aircraft ground training curriculum for the flight crew applicable to their duties, the type of operations conducted and aircraft flown. Instructions shall include at least the following general subjects—
 - (1) AOC holder's dispatch, flight release, or flight locating procedures;
 - (2) Principles and methods for determining mass and balance, and runway limitations for takeoff;
 - (3) Adverse weather recognition and avoidance, and flight procedures which shall be followed when operating in the following conditions:
 - (i) Icing.
 - (ii) Fog.
 - (iii) Turbulence.
 - (iv) Heavy precipitation.
 - (v) Thunderstorms.
 - (vi) Low-level windshear and microburst.
 - (vii) Low visibility.
 - (4) Normal and emergency communications procedures and navigation equipment including the AOC holder's communications procedures and ATC clearance requirements;
 - (5) Navigation procedures used in area departure, en route, area arrival, approach and landing phases;
 - (6) Approved crew resource management training;
 - (7) Air traffic control systems, procedures, and phraseology;
 - (8) Aircraft performance characteristics during all flight regimes, including:
 - (i) The use of charts, tables, tabulated data and other related manual information
 - (ii) Normal, abnormal, and emergency performance problems.
 - (iii) Meteorological and weight limiting performance factors (such as temperature, pressure, contaminated runways, precipitation, climb/runway limits).
 - (iv) Inoperative equipment performance limiting factors (such as MEL/CDL, inoperative antiskid).
 - (v) Special operational conditions (such as unpaved runways, high altitude aerodromes and drift down requirements).
- (b) Each AOC holder shall have an initial aircraft ground training curriculum for the flight crew applicable to their duties, the type of operations conducted and aircraft flown, including at least the following aircraft systems:
 - (1) Aircraft:
 - (i) Aircraft dimensions, turning radius, panel layouts, cockpit and cabin configurations.
 - (ii) Other major systems and components or appliances of the aircraft.

- (2) Powerplants:
 - (i) Basic engine description.
 - (ii) Engine thrust ratings.
 - (iii) Engine components such as accessory drives, ignition, oil, fuel control, hydraulic, and bleed air features.
- (3) Electrical.
 - (i) Sources of aircraft electrical power (engine driven generators, APU generator, and external power);
 - (ii) Electrical buses;
 - (iii) Circuit breakers;
 - (iv) Aircraft battery; and
 - (v) Standby power systems.
- (4) Hydraulic.
 - (i) Hydraulic reservoirs, pumps, accumulators; filters, check valves, interconnects and actuators; and
 - (ii) Other hydraulically operated components.
- (5) Fuel.
 - (i) Fuel tanks (location and quantities);
 - (ii) Engine driven pumps;
 - (iii) Boost pumps;
 - (iv) System valves and crossfeeds;
 - (v) Quantity indicators; and
 - (vi) Provisions for fuel jettisoning.
- (6) Pneumatic.
 - (i) Bleed air sources (APU or external ground air); and
 - (ii) Means of routing, venting and controlling bleed air via valves, ducts, chambers, and temperature and pressure limiting devices
- (7) Air conditioning and pressurisation.
 - (i) Heaters, air conditioning packs, fans, and other environmental control devices;
 - (ii) Pressurisation system components such as outflow and negative pressure relief valves; and
 - (iii) Automatic, standby, and manual pressurisation controls and annunciators.
- (8) Flight controls.
 - (i) Primary controls (yaw, pitch, and roll devices);
 - (ii) Secondary controls (leading/trailing edge devices, flaps, trim, and damping mechanisms);
 - (iii) Means of actuation (direct/indirect or fly by wire); and
 - (iv) Redundancy devices.
- (9) Landing gear.
 - (i) Landing gear extension and retraction mechanism including the operating sequence of struts, doors, and locking devices, and brake and antiskid systems, if applicable;
 - (ii) Steering (nose or body steering gear);
 - (iii) Bogie arrangements;
 - (iv) Air/ground sensor relays; and
 - (v) Visual downlock indicators.
- (10) Ice and rain protection.
 - (i) Rain removal systems; and
 - (ii) Anti-icing and/or de-icing system(s) affecting flight controls, engines, pitot static probes, fluid outlets, cockpit windows, and aircraft structures.
- (11) Equipment and furnishings.
 - (i) Exits;

- (ii) Galleys;
 - (iii) Water and waste systems;
 - (iv) Lavatories;
 - (v) Cargo areas;
 - (vi) Crew member and passenger seats;
 - (vii) Bulkheads;
 - (viii) Seating and/or cargo configurations; and
 - (ix) Non-emergency equipment and furnishings.
- (12) Navigation equipment.
- (i) Flight directors;
 - (ii) Horizontal situation indicator;
 - (iii) Radio magnetic indicator;
 - (iv) Navigation receivers (GPS, ADF, VOR, OMEGA, LORAN-C, RNAV, Marker Beacon, DME);
 - (v) Inertial systems (INS, IRS);
 - (vi) Functional displays;
 - (vii) Fault indications and comparator systems;
 - (viii) Aircraft transponders;
 - (ix) Radio altimeters;
 - (x) Weather radar; and
 - (xi) Cathode ray tube or computer generated displays of aircraft position and navigation information.
- (13) Auto flight system.
- (i) Autopilot;
 - (ii) Autothrottles;
 - (iii) Flight director and navigation systems;
 - (iv) Automatic approach tracking;
 - (v) Autoland; and
 - (vi) Automatic fuel and performance management systems.
- (14) Flight instruments.
- (i) Panel arrangement;
 - (ii) Flight instruments (attitude indicator, directional gyro, magnetic compass, airspeed indicator, vertical speed indicator, altimeters, standby instruments); and
 - (iii) Instrument power sources, and instrument sensory sources (e.g., Pitot static pressure).
- (15) Display systems.
- (i) Weather radar; and
 - (ii) Other CRT displays (e.g., checklist, vertical navigation or longitudinal navigation displays).
- (16) Communication equipment.
- (i) VHF/HF radios;
 - (ii) Audio panels;
 - (iii) Inflight interphone and passenger address systems;
 - (iv) Voice recorder; and
 - (v) Air/ground passive communications systems (ACARS).
- (17) Warning systems.
- (i) Aural, visual, and tactile warning systems (including the character and degree of urgency related to each signal); and
 - (ii) Warning and caution annunciator systems (including ground proximity and takeoff warning systems).
- (18) Fire protection.

- (i) Fire and overheat sensors, loops, modules, or other means of providing visual and/or aural indications of fire or overheat detection;
 - (ii) Procedures for the use of fire handles, automatic extinguishing systems and extinguishing agents; and
 - (iii) Power sources necessary to provide protection for fire and overheat conditions in engines, APU, cargo bay/wheel well, cockpit, cabin and lavatories.
- (19) Oxygen.
- (i) Passenger, crew, and portable oxygen supply systems;
 - (ii) Sources of oxygen (gaseous or solid);
 - (iii) Flow and distribution networks;
 - (iv) Automatic deployment systems;
 - (v) Regulators, pressure levels and gauges; and
 - (vi) Servicing requirements.
- (20) Lighting.
- (i) Cockpit, cabin, and external lighting systems;
 - (ii) Power sources;
 - (iii) Switch positions; and
 - (iv) Spare lightbulb locations.
- (21) Emergency equipment.
- (i) Fire and oxygen bottles;
 - (ii) First aid kits;
 - (iii) Liferafts and life preservers;
 - (iv) Crash axes;
 - (v) Emergency exits and lights;
 - (vi) Slides and sliderafts;
 - (vii) Escape straps or handles; and
 - (viii) Hatches, ladders and movable stairs.
- (22) Auxiliary Power Unit (APU).
- (i) Electric and bleed air capabilities;
 - (ii) Interfaces with electrical and pneumatic systems;
 - (iii) Inlet doors and exhaust ducts;
 - (iv) Fuel supply.
- (c) Each AOC holder shall have an initial aircraft ground training curriculum for the flight crew applicable to their duties, the type of operations conducted and aircraft flown, including at least the following *aircraft systems integration items*:
- (1) Use of checklist.
 - (i) Safety checks;
 - (ii) Cockpit preparation (switch position and checklist flows);
 - (iii) Checklist callouts and responses; and
 - (iv) Checklist sequence.
 - (2) Flight planning.
 - (i) Performance limitations (meteorological, weight, and MEL/CDL items);
 - (ii) Required fuel loads;
 - (iii) Weather planning (lower than standard takeoff minimums or alternate requirements).
 - (3) Navigation systems.
 - (i) Pre-flight and operation of applicable receivers;
 - (ii) Onboard navigation systems; and

- (iii) Flight plan information input and retrieval.
- (4) Autoflight.
 - (i) Autopilot, autothrust, and flight director systems, including the appropriate procedures, normal and abnormal indications, and annunciators.
- (5) Cockpit familiarisation
 - (i) Activation of aircraft system controls and switches to include normal, abnormal and emergency switches; and
 - (ii) Control positions and relevant annunciators, lights, or other caution and warning systems.

IS: 8.10.1.14(c) INITIAL AIRCRAFT GROUND TRAINING - CABIN ATTENDANTS

- (a) Each AOC holder shall have an initial ground training curriculum for cabin attendants applicable to the type of operations conducted and aircraft flown, including at least the following *general subjects*:
 - (1) Aircraft familiarisation.
 - (i) Aircraft characteristics and description;
 - (ii) Flightdeck configuration;
 - (iii) Cabin configuration;
 - (iv) Galleys;
 - (v) Lavatories; and
 - (vi) Stowage areas.
 - (2) Aircraft equipment and furnishings.
 - (i) Cabin attendant stations;
 - (ii) Cabin attendant panels;
 - (iii) Passenger seats;
 - (iv) Passenger service units and convenience panels;
 - (v) Passenger information signs;
 - (vi) Aircraft markings; and
 - (vii) Aircraft placards.
 - (3) Aircraft systems.
 - (i) Air conditioning and pressurisation system;
 - (ii) Aircraft communication systems (call, interphone and passenger address);
 - (iii) Lighting and electrical systems;
 - (iv) Oxygen systems (flightcrew, observer and passenger); and
 - (v) Water system.
 - (4) Aircraft exits.
 - (i) General information;
 - (ii) Exits with slides or sliderafts (pre-flight and normal operation);
 - (iii) Exits without slides (pre-flight and normal operations); and
 - (iv) Window exits.
 - (5) Crew member communication and co-ordination.
 - (i) Authority of PIC;
 - (ii) Routine communication signals and procedures; and
 - (iii) Crew member briefing.
 - (6) Routine crew member duties and procedures.
 - (i) Crew member general responsibilities;
 - (ii) Reporting duties and procedures for specific aircraft;
 - (iii) Predeparture duties and procedures prior to passenger boarding;

- (iv) Passenger boarding duties and procedures;
 - (v) Prior to movement on the surface duties and procedures;
 - (vi) Prior to takeoff duties and procedures applicable to specific aircraft;
 - (vii) Inflight duties and procedures;
 - (viii) Prior to landing duties and procedures;
 - (ix) Movement on the surface and arrival duties and procedures;
 - (x) After arrival duties and procedures; and
 - (xi) Intermediate stops.
- (7) Passenger handling responsibilities.
- (i) Crew member general responsibilities;
 - (ii) Infants, children, and unaccompanied minors;
 - (iii) Passengers needing special assistance;
 - (iv) Passengers needing special accommodation;
 - (v) Carry-on stowage requirements;
 - (vi) Passenger seating requirements; and
 - (vii) Smoking and no smoking requirements.
- (8) Approved Crew Resource Management (CRM) training for cabin attendants.
- (b) Each AOC holder shall have an initial ground training curriculum for cabin attendants applicable to the type of operations conducted and aircraft flown, including at least the following *aircraft specific emergency subjects*:
- (1) Emergency equipment.
- (i) Emergency communication and notification systems;
 - (ii) Aircraft exits;
 - (iii) Exits with slides or sliderafts (emergency operation);
 - (iv) Slides and sliderafts in a ditching;
 - (v) Exits without slides (emergency operation);
 - (vi) Window exits (emergency operation);
 - (vii) Exits with tailcones (emergency operation);
 - (viii) Cockpit exits (emergency operation);
 - (ix) Ground evacuation and ditching equipment;
 - (x) First aid equipment;
 - (xi) Portable oxygen systems (oxygen bottles, chemical oxygen generators, protective breathing equipment (PBE));
 - (xii) Firefighting equipment;
 - (xiii) Emergency lighting systems; and
 - (xiv) Additional emergency equipment.
- (2) Emergency assignments and procedures.
- (i) General types of emergencies specific to aircraft;
 - (ii) Emergency communication signals and procedures;
 - (iii) Rapid decompression;
 - (iv) Insidious decompression and cracked window and pressure seal leaks;
 - (v) Fires;
 - (vi) Ditching;
 - (vii) Ground evacuation;
 - (viii) Unwarranted evacuation (i.e., passenger initiated);
 - (ix) Illness or injury;
 - (x) Abnormal situations involving passengers or crew members;
 - (xi) Hijacking;

- (xii) Bomb threat;
 - (xiii) Turbulence;
 - (xiv) Other unusual situations including awareness of other crewmembers' assignments and functions as they pertain to the cabin attendant's own duties; and
 - (xv) Previous aircraft accidents and incidents.
- (3) Aircraft specific emergency drills.
- (i) Emergency exit drill;
 - (ii) Hand fire extinguisher drill;
 - (iii) Emergency oxygen system drill;
 - (iv) Flotation device drill;
 - (v) Ditching drill, if applicable;
 - (vi) Liferaft removal and inflation drill, if applicable;
 - (vii) Slideraft pack transfer drill, if applicable;
 - (viii) Slide or slideraft deployment, inflation, and detachment drill, if applicable; and
 - (ix) Emergency evacuation slide drill, if applicable.
- (c) Each AOC holder shall ensure that initial ground training for cabin attendants includes a competence check given by the appropriate supervisor or ground instructor to determine his or her ability to perform assigned duties and responsibilities.
- (d) Each AOC holder shall ensure that initial ground training for cabin attendants consists of at least the following programmed hours of instruction:
- (1) Multi-engine turbine: 16 hours; and
 - (2) Multi-engine reciprocating: 8 hours.

IS: 8.10.1.14(D) INITIAL AIRCRAFT GROUND TRAINING -FLIGHT OPERATIONS OFFICER

- (a) Each AOC holder shall provide initial aircraft ground training for flight operations officers that include instruction in at least the following general dispatch subjects:
- (1) Normal and emergency communications procedures
 - (2) Available sources of weather information
 - (3) Actual and prognostic weather charts
 - (4) Interpretation of weather information
 - (5) Adverse weather phenomena (e.g., clear air turbulence, windshear, and thunderstorms)
 - (6) Notice to Airmen (NOTAM) system
 - (7) Navigational charts and publications
 - (8) Air traffic control (ATC) and instrument procedures
 - (9) Familiarisation with operational area
 - (10) Characteristics of special aerodromes and other operationally significant aerodromes which the operator uses (i.e., terrain, approach aids, or prevailing weather phenomena)
 - (11) Joint flight operations officer/pilot responsibilities
 - (12) Approved Crew Resource Management (CRM) training for flight operations officers
- (b) Each AOC holder shall provide initial aircraft ground training for flight operations officers that include instruction in at least the following aircraft characteristics:
- (1) General operating characteristics of the AOC holder's aircraft
 - (2) Aircraft specific training with emphasis on the following topics:
 - (i) Aircraft operating and performance characteristics,
 - (ii) Navigation equipment,

- (iii) Instrument approach and communications equipment, and
- (iv) Emergency equipment.
- (3) Flight manual training
- (4) Equipment training
- (c) Each AOC holder shall provide initial aircraft ground training for flight operations officers that include instruction in at least the following emergency procedures:
 - (1) Assisting the flight crew in an emergency
 - (2) Alerting of appropriate governmental, company and private agencies
- (d) Each AOC holder shall ensure that initial ground training for flight operations officers includes a competence check given by an appropriate supervisor or ground instructor that demonstrates the required knowledge and abilities.

IS: 8.10.1.15 INITIAL AIRCRAFT FLIGHT TRAINING

- (a) Each AOC holder shall ensure that pilot initial flight training includes at least the following:

Note: Flight training may be conducted in an appropriate aircraft or adequate training simulator (simulator shall have landing capability).

- (1) Preparation
 - (i) Visual inspection (for aircraft with a flight engineer, use of pictorial display authorised)
 - (ii) Pre-taxi procedures
 - (iii) Performance limitations
- (2) Surface operation
 - (i) Pushback
 - (ii) Powerback taxi, if applicable to type of operation to be conducted
 - (iii) Starting
 - (iv) Taxi
 - (v) Pre take-off checks
- (3) Takeoff
 - (i) Normal
 - (ii) Crosswind
 - (iii) Rejected
 - (iv) Power failure after V_1
 - (v) Lower than standard minimum, if applicable to type of operation to be conducted
- (4) Climb
 - (i) Normal
 - (ii) One-engine inoperative during climb to en route altitude
- (5) En route
 - (i) Steep turns (PIC only)
 - (ii) Approaches to stalls (takeoff, en route, and landing configurations)
 - (iii) Inflight powerplant shutdown
 - (iv) Inflight powerplant restart
 - (v) High speed handling characteristics
- (6) Descent
 - (i) Normal
 - (ii) Maximum rate
- (7) Approaches

- (i) VFR procedures
- (ii) Visual approach with 50% loss of power on one-engine (2 engines inoperative on 3-engine aeroplanes) (PIC only)
- (iii) Visual approach with slat/flap malfunction
- (iv) IFR precision approaches (ILS normal and ILS with one-engine inoperative)
- (v) IFR non-precision approaches (NDB normal and VOR normal)
- (vi) Non-precision approach with one engine inoperative (LOC backcourse procedures, SDF/LDA, GPS, TACAN and circling approach procedures)

Note: Simulator shall be qualified for training/checking on the circling manoeuvre.

- (vii) Missed approach from precision approach
- (viii) Missed approach from non-precision approach
- (ix) Missed approach with powerplant failure
- (8) Landings
 - (i) Normal with a pitch mistrim (small aircraft only)
 - (ii) Normal from precision instrument approach
 - (iii) Normal from precision instrument approach with most critical engine inoperative
 - (iv) Normal with 50% loss of power on one side (2 engines inoperative on 3-engine aeroplanes) (PIC only)
 - (v) Normal with flap/slat malfunction
 - (vi) Rejected landings
 - (vii) Crosswind
 - (viii) Manual reversion/degraded control augmentation
 - (ix) Short/soft field (small aircraft only)
 - (x) Glassy/rough water (seaplanes only)
- (9) After landing
 - (i) Parking
 - (ii) Emergency evacuation
 - (iii) Docking, mooring, and ramping (seaplanes only)
- (10) Other flight procedures during any airborne phase
 - (i) Holding
 - (ii) Ice accumulation on airframe
 - (iii) Air hazard avoidance
 - (iv) Windshear/microburst
- (11) Normal, abnormal and alternate systems procedures during any phase
 - (i) Pneumatic/pressurisation
 - (ii) Air conditioning
 - (iii) Fuel and oil
 - (iv) Electrical
 - (v) Hydraulic
 - (vi) Flight controls
 - (vii) Anti-icing and de-icing systems
 - (viii) Autopilot
 - (ix) Flight management guidance systems and/or automatic or other approach and landing aids
 - (x) Stall warning devices, stall avoidance devices, and stability augmentation systems
 - (xi) Airborne weather radar
 - (xii) Flight instrument system malfunction

- (xiii) Communications equipment
- (xiv) Navigation systems
- (12) Emergency systems procedures during any phase
 - (i) Aircraft fires
 - (ii) Smoke control
 - (iii) Powerplant malfunctions
 - (iv) Fuel jettison
 - (v) Electrical, hydraulic, pneumatic systems
 - (vi) Flight control system malfunction
 - (vii) Landing gear and flap system malfunction
- (b) Each AOC Holder shall ensure that flight engineer flight training includes at least the following:
 - (1) Training and practice in procedures related to the carrying out of flight engineer duties and functions. This training and practice may be accomplished either in flight, in an aeroplane simulator or a training device.
 - (2) A proficiency check as specified in Section 8.10.1.23
- (c) Each AOC holder shall ensure that flight training includes at least the following:
 - (1) Initial flight training for flight navigators must include flight training and a flight check that is adequate to ensure the crewmember's proficiency in the performance of his/her assigned duties.
 - (2) The flight training and check specified in paragraph (1) must be performed-
 - (i) In-flight or in an appropriate training device; or
 - (ii) In commercial air transport operations, if performed under the supervision of a qualified flight navigator.

IS: 8.10.1.16 INITIAL SPECIALISED OPERATIONS TRAINING

- (a) Each AOC holder shall provide initial specialised operations training to ensure that each pilot is qualified in the type of operation in which he or she serves and in any specialised or new equipment, procedures, and techniques, such as:
 - (1) Class II navigation
 - (i) Knowledge of specialised navigation procedures, such as MNPS
 - (ii) Knowledge of specialised navigation equipment, such as FMC, INS, IRS, GPS, LORAN, OMEGA etc.
 - (2) CAT II and CAT III approaches
 - (i) Special equipment, procedures and practice
 - (ii) A demonstration of competency
 - (3) Lower than standard minimum takeoffs
 - (i) Runway and lighting requirements
 - (ii) Rejected takeoffs at, or near, V_1 with a failure of the most critical engine
 - (iii) Taxi operations
 - (iv) Procedures to prevent runway incursions under low visibility conditions
 - (4) Extended range operations with two engine aeroplanes; including training for crewmembers and dispatchers in their roles and responsibilities in the certificate holder's passenger recovery plan, if applicable
 - (5) Vertical navigation
 - (i) Knowledge of specialised vertical separation procedures, such as RVSM
 - (ii) Knowledge of specialised vertical navigation equipment, such as FMS, FMC, GPS etc.
 - (6) The use of the GPWS and TCAS (ref. ICAO Doc 8168 Part VIII Ch.3)
 - (7) The use of autopilots and auto-throttles, limitations on high rates of decent near the surface and the avoidance of Controlled Flight Into Terrain (CFIT)
 - (8) Airborne radar approaches
 - (9) Autopilot instead of SIC

- (b) Each AOC holder shall provide initial specialised operations training to ensure that each flight operations officer has sufficient knowledge in the type of operation in which he or she serves and in any specialised or new equipment, procedures and techniques, as mentioned in paragraph (a) (1)(2)(4)(5).

IS: 8.10.1.17 AIRCRAFT DIFFERENCES - FLIGHT OPERATIONS OFFICER

- (a) Each AOC holder shall provide aircraft differences training for flight operations officers when the operator has aircraft variances within the same type of aircraft, which includes at least the following:
 - (1) Operations procedures—
 - (i) Operations under adverse weather phenomena conditions, including clear air turbulence, windshear, and thunderstorms;
 - (ii) Weight and balance computations and load control procedures;
 - (iii) Aircraft performance computations, to include takeoff weight limitations based on departure runway, arrival runway, and en route limitations, and also engine-out limitations;
 - (iv) Flight planning procedures, to include route selection, flight time, and fuel requirements analysis;
 - (v) Dispatch release preparation;
 - (vi) Crew briefings;
 - (vii) Flight monitoring procedures;
 - (viii) Flightcrew response to various emergency situations, including the assistance the aircraft flight operations officer can provide in each situation;
 - (ix) MEL and CDL procedures;
 - (x) Manual performance of an required procedures in case of the loss of automated capabilities;
 - (xi) Training in appropriate geographic areas;
 - (xii) ATC and instrument procedures, to include ground hold and central flow control procedures; and
 - (xiii) Radio/telephone procedures.
 - (2) Emergency procedures—
 - (i) Actions taken to aid the flightcrew; and
 - (ii) AOC holder and Authority notification.

IS: 8.10.1.20 AIRCRAFT AND INSTRUMENT PROFICIENCY CHECK: PILOT

- (a) Satisfactory completion of a PIC proficiency check following completion of an approved air carrier training program for the particular type aircraft, satisfies the requirement for an aircraft type rating practical test if—
 - (1) That proficiency check includes all manoeuvres and procedures required for a type rating practical test; and
 - (2) Proficiency checks are conducted by an examiner approved by the Authority.
- (b) Aircraft and instrument proficiency checks for PIC and SIC must include the following operations and procedures listed in Table A. As noted, examiners may waive certain events on the flight test based on an assessment of the pilot's demonstrated level of performance.

TYPE OF OPERATION OR PROCEDURE	PIC or SIC	Notes
Ground Operations		
Preflight inspection	PIC/SIC	
Taxiing	PIC/SIC	Both pilots may take simultaneous credit.
Powerplant checks	PIC/SIC	Both pilots may take simultaneous credit.
Takeoffs		
Normal	PIC/SIC	
Instrument	PIC/SIC	
Crosswind	PIC/SIC	
With powerplant failure	PIC/SIC	
Rejected takeoff	PIC/SIC	Both pilots may take simultaneous credit. May be waived.
Instrument Procedures		
Area departure	PIC/SIC	May be waived.
Area arrival	PIC/SIC	May be waived.
Holding	PIC/SIC	May be waived.

TYPE OF OPERATION OR PROCEDURE	PIC or SIC	Notes
Normal ILS approach	PIC/SIC	
Engine-out ILS	PIC/SIC	
Coupled ILS approach	PIC/SIC	Both pilots may take simultaneous credit
Nonprecision approach	PIC/SIC	
Second nonprecision approach	PIC/SIC	
Missed approach from an ILS	PIC/SIC	
Second missed approach	PIC only	
Circling approach	PIC/SIC	Only when authorized in the AOC holder's Operations Manual. May be waived.
Inflight Maneuvers		
Sleep turns	PIC only	May be waived.
Specific flight characteristics	PIC/SIC	
Approaches to stalls	PIC/SIC	May be waived.
Powerplant failure	PIC/SIC	
2 engine inoperative approach (3 and 4 engine aircraft)	PIC/SIC	
Normal landing	PIC/SIC	
Landing from an ILS	PIC/SIC	
Crosswind landing	PIC/SIC	
Landing with engine-out	PIC/SIC	
Landing from circling approach	PIC/SIC	Only if authorized in Operations Manual. May be waived.
Normal And Non-Normal Procedures		
Rejected landing	PIC/SIC	
2 engine inoperative landing (3 and 4 engine aircraft)	PIC only	
Other Events	PIC or SIC	Examiner's discretion.

- (c) The oral and flight test phases of a proficiency check should not be conducted simultaneously.
- (d) When the examiner determines that an applicant's performance is unsatisfactory, the examiner may terminate the flight test immediately or, with the consent of the applicant, continue with the flight test until the remaining events are completed.
- (e) If the check must be terminated (for mechanical or other reasons) and there are events which still need to be repeated, the examiner shall issue a letter of discontinuance, valid for 60 days, listing the specific areas of operation that have been successfully completed.

IS: 8.10.1.22**PAIRING OF LOW EXPERIENCE CREW MEMBERS: COMMERCIAL AIR TRANSPORT**

- (a) Situations designated as critical by the Authority at special aerodromes designated by the Authority or at special aerodromes designated by the AOC holder include—
 - (1) The prevailing visibility value in the latest weather report for the aerodrome is at or below 3/4 mile;
 - (2) The runway visual range for the runway to be used is at or below 4,000 feet;
 - (3) The runway to be used has water, snow, slush or similar conditions that may adversely affect aeroplane performance;
 - (4) The braking action on the runway to be used is reported to be less than "good";
 - (5) The crosswind component for the runway to be used is in excess of 15 knots;
 - (6) Windshear is reported in the vicinity of the aerodrome; or
 - (7) Any other condition in which the PIC determines it to be prudent to exercise the PIC's prerogative.
- (b) Circumstances which would be routinely be considered for deviation from the required minimum line operating flight time include—
 - (1) A newly certified AOC holder does not employ any pilots who meet the minimum flight time requirements;
 - (2) An existing AOC holder adds to its fleet a type aeroplane not before proven for use in its operations; or
 - (3) An existing AOC holder establishes a new domicile to which it assigns pilots who will be required to become qualified on the aeroplanes operated from that domicile.

IS: 8.10.1.23 FLIGHT ENGINEER PROFICIENCY CHECKS

- (a) Examiners shall include during proficiency checks for flight engineers an oral or written examination of the normal, abnormal, and emergency procedures listed below:
- (1) Normal procedures—
 - (i) Interior pre-flight
 - (ii) Panel set-up
 - (iii) Fuel load
 - (iv) Engine start procedures
 - (v) Taxi and before takeoff procedures
 - (vi) Takeoff and climb Pressurisation
 - (vii) Cruise and fuel management
 - (viii) Descent and approach
 - (ix) After landing and securing
 - (x) Crew co-ordination
 - (xi) Situational awareness, traffic scan, etc.
 - (xii) Performance computations
 - (xiii) Anti-ice, de-ice
 - (2) Abnormal and emergency procedures—
 - (i) Troubleshooting
 - (ii) Knowledge of checklist
 - (iii) Ability to perform procedures
 - (iv) Crew co-ordination
 - (v) Minimum equipment list (MEL) and configuration deviation list (CDL)
 - (vi) Emergency or alternate operation of aeroplane flight systems

IS: 8.10.1.24 COMPETENCE CHECKS: CABIN ATTENDANTS

- (a) Evaluators shall conduct competency checks for cabin attendants to demonstrate that the candidate's proficiency level is sufficient to successfully perform assigned duties and responsibilities.
- (b) A qualified supervisor or inspector, approved by the Authority, shall observe and evaluate competency checks for cabin attendants.
- (c) Evaluators shall include during each cabin attendant competency check a demonstrated knowledge of:
- (1) Emergency equipment—
 - (i) Emergency communication and notification systems;
 - (ii) Aircraft exits;
 - (iii) Exits with slides or sliderafts (emergency operation);
 - (iv) Slides and sliderafts in a ditching;
 - (v) Exits without slides (emergency operation);
 - (vi) Window exits (emergency operation);
 - (vii) Exits with tailcones (emergency operation);
 - (viii) Cockpit exits (emergency operation);
 - (ix) Ground evacuation and ditching equipment;
 - (x) First aid equipment;
 - (xi) Portable oxygen systems (oxygen bottles, chemical oxygen generators, protective breathing equipment (PBE));
 - (xii) Firefighting equipment;

- (xiii) Emergency lighting systems; and
- (xiv) Additional emergency equipment.
- (2) Emergency procedures—
 - (i) General types of emergencies specific to aircraft;
 - (ii) Emergency communication signals and procedures;
 - (iii) Rapid decompression;
 - (iv) Insidious decompression and cracked window and pressure seal leaks;
 - (v) Fires;
 - (vi) Ditching;
 - (vii) Ground evacuation;
 - (viii) Unwarranted evacuation (i.e., Passenger initiated);
 - (ix) Illness or injury;
 - (x) Abnormal situations involving passengers or crew members;
 - (xi) Turbulence; and
 - (xii) Other unusual situations.
- (3) Emergency drills—
 - (i) Location and use of all emergency and safety equipment carried on the aeroplane;
 - (ii) The location and use of all types of exits;
 - (iii) Actual donning of a lifejacket where fitted;
 - (iv) Actual donning of protective breathing equipment; and
 - (v) Actual handling of fire extinguishers.
- (4) Crew Resource Management—
 - (i) Decision making skills;
 - (ii) Briefings and developing open communication;
 - (iii) Inquiry, advocacy, and assertion training; and
 - (iv) Workload management.
- (5) Dangerous goods—
 - (i) Recognition of and transportation of dangerous goods;
 - (ii) Proper packaging, marking, and documentation; and
 - (iii) Instructions regarding compatibility, loading, storage and handling characteristics.
- (6) Security—
 - (i) Acts of unlawful interference; and
 - (ii) Disruptive passengers.

IS: 8.10.1.25 COMPETENCE CHECKS: FLIGHT OPERATIONS OFFICERS

- (a) Evaluators shall conduct competency checks for flight operations officers to demonstrate that the candidate's proficiency level is sufficient to ensure the successful outcome of all dispatch operations.
- (b) A qualified supervisor or inspector, approved by the Authority, shall observe and evaluate competency checks for flight operations officers.
- (c) Each competency check for flight operations officers shall include:
 - (1) An evaluation of all aspects of the dispatch function;
 - (2) A demonstration of the knowledge and abilities in normal and abnormal situations; and
 - (3) An observation of actual flights being dispatched
- (d) Each evaluator of newly hired flight operations officers shall include during initial competency checks an evaluation of all of geographic areas and types of aircraft the flight operations officer will be qualified to

dispatch. (Note: The supervisor may approve a competency check of representative aircraft types when, in the supervisor's judgement, a check including all types is impractical or unnecessary)

- (e) Evaluators may limit initial equipment and transition competency checks solely to the dispatch of the types of aeroplanes on which the aircraft dispatcher is qualifying (unless the check is to simultaneously count as a recurrent check).
- (f) Each evaluator of flight operations officers shall include, during recurrent and requalification competency checks, a representative sample of aircraft and routes for which the aircraft dispatcher maintains current qualification.
- (g) The Authority requires special operations competency checks before an aircraft dispatcher is qualified in ETOPS or other special operations authorised by the Authority.

IS: 8.10.1.33 RECURRENT TRAINING: FLIGHT CREW

- (a) Each AOC holder shall establish a recurrent training program for all flight crew members in the AOC holder's operations manual and shall have it approved by the Authority.
- (b) Each flight crew member shall undergo recurrent training relevant to the type or variant of aeroplane on which he or she is certified to operate and for the crew member position involved.
- (c) Each AOC holder shall have all recurrent training conducted by suitably qualified personnel.
- (d) Each AOC holder shall ensure that flight crew member recurrent ground training includes at least the following:
 - (1) General subjects
 - (i) Flight locating procedures
 - (ii) Principles and method for determining mass and balance and runway limitations
 - (iii) Meteorology to ensure practical knowledge of weather phenomena including the principles of frontal system, icing, fog, thunderstorms, windshear, and high altitude weather situations
 - (iv) ATC systems and phraseology
 - (v) Navigation and use of navigational aids
 - (vi) Normal and emergency communication procedures
 - (vii) Visual cues before descent to MDA
 - (viii) Accident/incident and occurrence review
 - (ix) Other instructions necessary to ensure the pilot's competence
 - (2) Aircraft systems and limitations
 - (i) Normal, abnormal, and emergency procedures
 - (ii) Aircraft performance characteristics
 - (iii) Engines and or propellers
 - (iv) Major aircraft components
 - (v) Major aircraft systems (i.e., flight controls, electric, hydraulic and other systems as appropriate)
 - (vi) Ground icing and de-icing procedures and requirements
 - (3) Emergency equipment and drills
 - Every 12 months—
 - (i) Location and use of all emergency and safety equipment carried on the aircraft;
 - (ii) The location and use of all types of exits;
 - (iii) Actual donning of a lifejacket where fitted;
 - (iv) Actual donning of protective breathing equipment; and
 - (v) Actual handling of fire extinguishers.
 - Every 3 years—

- (vi) Operation of all types of exits;
- (vii) Demonstration of the method used to operate a slide, where fitted; and
- (viii) Fire-fighting using equipment representative of that carried in the aircraft on an actual or simulated fire;

Note: With halon extinguishers, an alternative method acceptable to the authority may be used.

- (ix) Effects of smoke in an enclosed area and actual use of all relevant equipment in a simulated smoke-filled environment;
 - (x) Actual handling of pyrotechnics, real or simulated, where fitted;
 - (xi) Demonstration in the use of the life-raft(s), where fitted;
 - (xii) An emergency evacuation drill;
 - (xiii) A ditching drill, if applicable; and
 - (xiv) A rapid decompression drill, if applicable.
- (4) Crew resource management—
 - (i) Decision making skills;
 - (ii) Briefings and developing open communication;
 - (iii) Inquiry, advocacy, and assertion training;
 - (iv) Workload management; and
 - (v) Situational awareness.
 - (5) Dangerous goods—
 - (i) Recognition of and transportation of dangerous goods;
 - (ii) Proper packaging, marking, and documentation; and
 - (iii) Instructions regarding compatibility, loading, storage and handling characteristics.
 - (6) Security—
 - (i) Acts of unlawful interference; and
 - (ii) Disruptive passengers.
- (e) Each AOC holder shall verify knowledge of the recurrent ground training by an oral or written examination.
 - (f) Each AOC holder shall ensure that pilot recurrent flight training include at least the following:

Note: Flight training may be conducted in an appropriate aircraft or adequate training simulator (simulator shall have landing capability).

- (1) Preparation—
 - (i) Visual inspection (use of pictorial display authorised); and
 - (ii) Pre-taxi procedures.
- (2) Surface operation—
 - (i) Performance limitations;
 - (ii) Cockpit management;
 - (iii) Securing cargo;
 - (iv) Pushback;
 - (v) Powerback taxi;
 - (vi) Starting;
 - (vii) Taxi; and
 - (viii) Pre take-off checks.
- (3) Takeoff—
 - (i) Normal;
 - (ii) Crosswind;
 - (iii) Rejected;

- (iv) Power failure after V_1 ;
 - (v) Powerplant failure during second segment; and
 - (vi) Lower than standard minimum.
- (4) Climb—
- (i) Normal; and
 - (ii) One-engine inoperative during climb to en route altitude.
- (5) En route—
- (i) Steep turns;
 - (ii) Approaches to stalls (takeoff, en route, and landing configurations);
 - (iii) Inflight powerplant shutdown;
 - (iv) Inflight powerplant restart; and
 - (v) High speed handling characteristics.
- (6) Descent—
- (i) Normal; and
 - (ii) Maximum rate.
- (7) Approaches—
- (i) VFR procedures;
 - (ii) Visual approach with one engine inoperative for 2-engine aeroplanes and 2 engines inoperative on 3- and 4-engine aeroplanes on one side(PIC only);
 - (iii) Visual approach with slat/flap malfunction;
 - (iv) IFR precision approaches (ILS normal and ILS with one-engine inoperative);
 - (v) IFR non-precision approaches (NDB normal and VOR normal);
 - (vi) Non-precision approach with one engine inoperative (LOC backcourse, SDF/LDA, GPS, TACAN and circling approach procedures);
- Note: Simulator shall be qualified for training/checking on the circling manoeuvre.*
- (vii) Missed approach from precision approach;
 - (viii) Missed approach from non-precision approach; and
 - (ix) Missed approach with powerplant failure.
- (8) Landings—
- (i) Normal with a pitch mistrim (small aircraft only);
 - (ii) Normal from precision instrument approach;
 - (iii) Normal from precision instrument approach with most critical engine inoperative;
 - (iv) Normal with one engine inoperative for 2-engine aeroplanes and 2 engines inoperative on 3- and 4-engine aeroplanes on one side(PIC only);
 - (v) Normal with flap/slat malfunction;
 - (vi) Rejected landings;
 - (vii) Crosswind;
 - (viii) Short/soft field (small aircraft only); and
 - (ix) Glassy/rough water (seaplanes only).
- (9) After landing—
- (i) Parking;
 - (ii) Emergency evacuation; and
 - (iii) Docking, mooring, and ramping (seaplanes only).
- (10) Other flight procedures during any airborne phase—
- (i) Holding;
 - (ii) Ice accumulation on airframe;

- (iii) Air hazard avoidance; and
 - (iv) Windshear/microburst.
- (11) Normal, abnormal and alternate systems procedures during any phase—
- (i) Pneumatic/pressurisation;
 - (ii) Air conditioning;
 - (iii) Fuel and oil;
 - (iv) Electrical;
 - (v) Hydraulic;
 - (vi) Flight controls;
 - (vii) Anti-icing and de-icing systems;
 - (viii) Flight management guidance systems and/or automatic or other approach and landing aids;
 - (ix) Stall warning devices, stall avoidance devices, and stability augmentation systems;
 - (x) Airborne weather radar;
 - (xi) Flight instrument system malfunction;
 - (xii) Communications equipment;
 - (xiii) Navigation systems;
 - (xiv) Auto-pilot;
 - (xv) Approach and landing aids; and
 - (xvi) Flight instrument system malfunction.
- (12) Emergency systems procedures during any phase—
- (i) Aircraft fires;
 - (ii) Smoke control;
 - (iii) Powerplant malfunctions;
 - (iv) Fuel jettison;
 - (v) Electrical, hydraulic, pneumatic systems;
 - (vi) Flight control system malfunction; and
 - (vii) Landing gear and flap system malfunction.
- (g) Each AOC holder shall ensure that flight engineer recurrent flight training includes at least the flight training specified in IS: 8.10.1.15(b).
- (h) Each AOC holder shall ensure that flight navigator recurrent training includes enough training and an in-flight check to ensure competency with respect to operating procedures and navigation equipment to be used and familiarity with essential navigation information pertaining to the AOC holder's routes that require a flight navigator.
- (i) The AOC holder may combine recurrent training with the AOC holder's proficiency check.
- (j) Recurrent ground and flight training curricula may be accomplished concurrently or intermixed, but completion of each of these curricula shall be recorded separately.

IS: 8.10.1.34 RECURRENT EMERGENCY TRAINING: CABIN ATTENDANTS

- (a) Each AOC holder shall establish and have approved by the Authority a recurrent training program for all cabin attendants.
- (b) Each cabin attendant shall undergo recurrent training in evacuation and other appropriate normal and emergency procedures and drills relevant to their assigned positions and the type(s) and/or variant(s) of aircraft on which they operate.
- (c) Each AOC holder shall have all recurrent training conducted by suitably qualified personnel.

- (d) Each AOC holder shall ensure that, every 12 months, each cabin attendant receive recurrent training in at least the following:
- (1) Emergency equipment—
 - (i) Emergency communication and notification systems;
 - (ii) Aircraft exits;
 - (iii) Exits with slides or sliderafts (emergency operation);
 - (iv) Slides and sliderafts in a ditching;
 - (v) Exits without slides (emergency operation);
 - (vi) Window exits (emergency operation);
 - (vii) Exits with tailcones (emergency operation);
 - (viii) Cockpit exits (emergency operation);
 - (ix) Ground evacuation and ditching equipment;
 - (x) First aid equipment;
 - (xi) Portable oxygen systems (oxygen bottles, chemical oxygen generators, protective breathing equipment (PBE));
 - (xii) Firefighting equipment;
 - (xiii) Emergency lighting systems; and
 - (xiv) Additional emergency equipment.
 - (2) Emergency procedures—
 - (i) General types of emergencies specific to aircraft;
 - (ii) Emergency communication signals and procedures;
 - (iii) Rapid decompression;
 - (iv) Insidious decompression and cracked window and pressure seal leaks;
 - (v) Fires;
 - (vi) Ditching;
 - (vii) Ground evacuation;
 - (viii) Unwarranted evacuation (i.e., passenger initiated);
 - (ix) Illness or injury;
 - (x) Abnormal situations involving passengers or crew members;
 - (xi) Turbulence; and
 - (xii) Other unusual situations.
 - (3) Emergency drills.

Every 12 months—

 - (i) Location and use of all emergency and safety equipment carried on the aircraft;
 - (ii) The location and use of all types of exits;
 - (iii) Actual donning of a lifejacket where fitted;
 - (iv) Actual donning of protective breathing equipment; and
 - (v) Actual handling of fire extinguishers.

Every 3 years—

 - (vi) Operation of all types of exits;
 - (vii) Demonstration of the method used to operate a slide, where fitted;
 - (viii) Fire-fighting using equipment representative of that carried in the aircraft on an actual or simulated fire;

Note: With Halon extinguishers, an alternative method acceptable to the Authority may be used.

 - (ix) Effects of smoke in an enclosed area and actual use of all relevant equipment in a simulated smoke-filled environment;

- (x) Actual handling of pyrotechnics, real or simulated, where fitted;
- (xi) Demonstration in the use of the life-raft(s), where fitted;
- (xii) An emergency evacuation drill;
- (xiii) A ditching drill, if applicable;
- (xiv) A rapid decompression drill, if applicable;
- (4) Crew resource management—
 - (i) Decision making skills;
 - (ii) Briefings and developing open communication;
 - (iii) Inquiry, advocacy, and assertion training; and
 - (iv) Workload management.
- (5) Dangerous goods—
 - (i) Recognition of and transportation of dangerous goods;
 - (ii) Proper packaging, marking, and documentation; and
 - (iii) Instructions regarding compatibility, loading, storage and handling characteristics.
- (6) Security—
 - (i) Acts of unlawful interference; and
 - (ii) Disruptive passengers.
- (e) An AOC holder may administer each of the recurrent training curricula concurrently or intermixed, but shall record completion of each of these curricula separately.

IS: 8.10.1.35 RECURRENT TRAINING - FLIGHT OPERATIONS OFFICER

- (a) Each AOC holder shall establish and maintain a recurrent training program, approved by the Authority and established in the AOC holder's operations manual, to be completed annually by each flight operations officer.
- (b) Each flight operations officer shall undergo recurrent training relevant to the type(s) and/or variant(s) of aircraft and operations conducted by the AOC holder.
- (c) Each AOC holder shall conduct all recurrent training by suitably qualified personnel.
- (d) An AOC holder shall ensure that, every 12 months, each flight operations officer receive recurrent training in at least the following:
 - (1) Aircraft-specific flight preparation;
 - (2) Emergency assistance to flight crews;
 - (3) Crew Resource Management; and
 - (4) Dangerous goods.
- (e) An AOC holder may administer each of the recurrent ground and flight training curricula concurrently or intermixed, but shall record completion of each of these curricula separately.

IS: 8.10.1.36 CHECK AIRMAN TRAINING

- (a) No person may use a person, nor may any person serve as a check airman (aircraft) or check airman (simulator) in a training program unless, with respect to the aircraft type involved, that person has satisfactorily completed the appropriate training phases for the aircraft, including recurrent training, that are required to serve as PIC or flight engineer, as applicable.
- (b) Each AOC holder shall ensure that initial ground training for check airmen includes:
 - (1) Check airman duties, functions, and responsibilities;
 - (2) Applicable regulations and the AOC holder's policies and procedures;
 - (3) Appropriate methods, procedures, and techniques for conducting the required checks;

- (4) Proper evaluation of student performance including the detection of:
 - (i) Improper and insufficient training, and
 - (ii) Personal characteristics of an applicant that could adversely affect safety;
 - (5) Appropriate corrective action in the case of unsatisfactory checks; and
 - (6) Approved methods, procedures, and limitations for performing the required normal, abnormal, and emergency procedures in the aircraft.
- (c) Transition ground training for all check airmen shall include the approved methods, procedures, and limitations for performing the required normal, abnormal, and emergency procedures applicable to the aeroplane to which the check airman is in transition.
 - (d) Each AOC holder shall ensure that the initial and transition flight training for check airmen (aircraft) includes:
 - (1) Training and practice in conducting flight evaluations (from the left and right pilot seats for pilot check airmen) in the required normal, abnormal, and emergency procedures to ensure competence to conduct the flight checks;
 - (2) The potential results of improper, untimely, or non-execution of safety measures during an evaluation; and
 - (3) The safety measures (to be taken from either pilot seat for pilot check airmen) for emergency situations that are likely to develop during an evaluation.
 - (e) Each AOC holder shall ensure that the initial and transition flight training for check airmen (simulator) includes:
 - (1) Training and practice in conducting flight checks in the required normal, abnormal, and emergency procedures to ensure competence to conduct the evaluations checks required by this part (this training and practice shall be accomplished in a flight simulator or in a flight training device).
 - (2) Training in the operation of flight simulators or flight training devices, or both, to ensure competence to conduct the evaluations required by this Part.
 - (f) An AOC holder may accomplish flight training for check airmen in full or in part in an aircraft, in a flight simulator, or in a flight training device, as appropriate.

IS: 8.10.1.37 FLIGHT INSTRUCTOR TRAINING

- (a) No person may use a person, nor may any person serve as flight instructor in a training program unless:
 - (1) That person has satisfactorily completed initial or transition flight instructor training; and
 - (2) Within the preceding 24 calendar months, that person satisfactorily conducts instruction under the observation of an inspector from the Authority, an AOC holder's check airman, or an examiner employed by the AOC holder;
- (b) An AOC holder may accomplish the observation check for a flight instructor, in part or in full, in an aircraft, a flight simulator, or a flight training device.
- (c) Each AOC holder shall ensure that initial ground training for flight instructors includes the following—
 - (1) Flight instructor duties, functions, and responsibilities;
 - (2) Applicable regulations and the AOC holder's policies and procedures;
 - (3) Appropriate methods, procedures, and techniques for conducting the required checks;
 - (4) Proper evaluation of student performance including the detection of:
 - (i) Improper and insufficient training, and
 - (ii) Personal characteristics of an applicant that could adversely affect safety;
 - (5) Appropriate corrective action in the case of unsatisfactory checks;
 - (6) Approved methods, procedures, and limitations for performing the required normal, abnormal, and emergency procedures in the aircraft;

- (7) Except for holders of a flight instructor rating:
- (i) The fundamental principles of the teaching-learning process;
 - (ii) Teaching methods and procedures; and
 - (iii) The instructor-student relationship.
- (d) Each AOC holder shall ensure that the transition ground training for flight instructors includes the approved methods, procedures, and limitations for performing the required normal, abnormal, and emergency procedures applicable to the aircraft to which the flight instructor is transitioning.
- (e) Each AOC holder shall ensure that the initial and transition flight training for flight instructors (aircraft), flight engineer instructors (aircraft), and flight navigator instructors (aircraft) includes the following:
- (1) The safety measures for emergency situations that are likely to develop during instruction.
 - (2) The potential results of improper, untimely, or non-execution of safety measures during instruction.
 - (3) For pilot flight instructor (aircraft):
 - (i) Inflight training and practice in conducting flight instruction from the left and right pilot seats in the required normal, abnormal, and emergency procedures to ensure competence as an instructor; and
 - (ii) The safety measures to be taken from either pilot seat for emergency situations that are likely to develop during instruction.
 - (4) For flight engineer instructors (aircraft) and flight navigator instructors (aircraft), in-flight training to ensure competence to perform assigned duties.
- (f) An AOC holder may accomplish the flight training requirements for flight instructors in full or in part, in a flight simulator, or a flight training device, as appropriate.
- (g) An AOC holder shall ensure that the initial and transition flight training for flight instructors (simulator) includes the following:
- (1) Training and practice in the required normal, abnormal, and emergency procedures to ensure competence to conduct the flight instruction required by this part. This training and practice shall be accomplished in full or in part in a flight simulator or in a flight training device.
 - (2) Training in the operation of flight simulators or flight training devices, or both, to ensure competence to conduct the flight instruction required by this Part.

IS: 8.11.1.3 DUTY AND REST PERIODS

Each AOC holder and each pilot shall use the following tables to consolidate all scheduling and actual event requirements with respect to crew member duty and rest periods for commercial air transport operations.

Acceptable Variations to the Basic Duty vs. Rest Requirements					
This table outlines flight crew maximum duty periods (including duty aloft) and prescribed rest periods.					
	Consecutive Hours of Flight Deck Duty	Intervening Rest Period	Flight Deck Duty (24 hour period)	Duty Aloft (Hours)	Total Duty Period (Hours)
1 Pilot Crew	8	16	8	8	16
2 Pilot Crew	8	16	8	8	18
2 Pilot + FE	9	NA	9	9	18
2 Pilots + 1 Relief Pilot	8	2X Actual Hours Flown	12	12	18
2 Pilot + 2 Relief Pilots	8	8	12	16	20

Acceptable Scheduled Initial Rest Period Reduction by Lengthening the Subsequent Rest Period			
Flight Deck Duty Period (Hours)	Rest Period (Hours)	Authorised Reduced Rest Period (Hours)	Next Rest Period if Reduction Taken
Less than 8	9	8	10
8-9	10	8	11
9 or more	11	9	12

Situations Requiring Longer Flight Crew Member Rest Periods				
	Period of Time	Total Flight Time (Hours)	Intervening Rest Period (Hours)	Subsequent Rest Period (Hours)
1 or 2 Pilot Crew	24	8+	2X Actual Hours Flown (but not less than 8 hours)	18
2 Pilots + FE	48	20+	NA	18
2 Pilots + FE	72	24+	NA	18
2 Pilots + FE + Relief Crew	Return to Base	NA	NA	2X Total flight hours aloft

Acceptable Situations for Reducing Initial Cabin Attendant Rest Period Through the Addition of Extra Attendants on the Flights				
Scheduled Duty Period (Hours)	Extra Attendants Required	Rest Period (Hours)	Authorised Reduced Rest Period (Hours)	Next Rest Period if Reduction Taken
14 or less	0	9	8	10
14-16	1	12	10	14
16-18	2	12	10	14
18-20	3	12	10	14

IS: 8.11.1.5 Maximum Allowable Flight Hours

Each AOC holder and each pilot shall use the following tables shall be used to determine the maximum allowable flight hours.

Maximum Allowable Flight Hours				
	12 calendar Months	Consecutive 90 Days	Consecutive 30 Days	Consecutive 7 days
<ul style="list-style-type: none"> Scheduled or Charter Flights Stage Lengths less than 4000 miles Aircraft more than 5700 kg. 	1,000	NA	100	30

<ul style="list-style-type: none"> Scheduled Flights Stage Lengths more than 4000 miles Aircraft more than 5700 kg. 	1,000	NA	100	30
Maximum Duty Aloft 2 Pilot + FE	1,200	300	120	34
Maximum Duty Aloft With Relief	1,200	350	120	40

Maximum Allowable Flight Hours				
<ul style="list-style-type: none"> Charter Flights Stage Lengths of more than 4000 miles Aircraft more than 5700 kg. 	1,000	NA	100	32
Maximum Duty Aloft 2 Pilot + FE	1,200	300	120	34
Maximum Duty Aloft With Relief	1,200	350	120	44

<ul style="list-style-type: none"> Scheduled Aircraft less than 5700 Kg 	1,200	400	120	34
<ul style="list-style-type: none"> Charter Aircraft less than 5700 Kg (Charter) 	1,400	500	120	34